
FATE

FederatedAI

Mar 31, 2021

DEPLOY

1	FATE Stand-alone Deployment Guide	3
1.1	1) Install FATE using Docker*(Recommended)*	3
1.2	2) Install FATE in Host	4
2	Fate Cluster Deployment Guide	7
2.1	1. General Introduction	7
2.2	2.Detailed Design	8
2.3	3. Basic Environment Configuration	8
2.4	4.Project Deployment	11
2.5	5.Test	20
2.6	5.1 Toy_example Deployment Verification	20
2.7	5.2 Minimize Test	21
2.8	5.3 Fateboard Testing	21
2.9	6.System Operation And Maintenance	22
2.10	6.2 View Process And Port	22
2.11	6.2.3 Service Log	23
3	7. Uninstall	25
3.1	7.1 Description	25
3.2	7.2 Perform uninstall	25
3.3	8. Appendix	25
3.4	8.1 Eggroll Parameter Tuning	25
4	Pipeline Examples	27
4.1	Introduction	27
4.2	Quick Start	27
5	Upload Data Guide	31
5.1	Accepted Data Type	31
5.2	Define upload data config file	32
5.3	Upload Command	32
6	DSL & Task Submit Runtime Conf Setting V1	35
6.1	DSL Configure File	35
6.2	Submit Runtime Conf	37
6.3	Multi-host configuration	39
7	DSL & Task Submit Runtime Conf Setting V2	41
7.1	DSL Configure File	41
7.2	JOB RUNTIME CONFIG Guide (for version 1.5.x and above)	44

8	Federated Machine Learning	57
8.1	Algorithm List	58
8.2	Secure Protocol	63
8.3	Params	64
9	Example Usage Guide.	87
9.1	FATE-Pipeline	87
9.2	DSL	88
9.3	Benchmark Quality	89
9.4	Upload Default Data	89
9.5	Toy Example	89
9.6	Min-test	90
10	FATE FLOW	91
10.1	Introduction	91
10.2	Architecture	92
10.3	Deploy	93
10.4	Usage	93
10.5	Logs	93
10.6	FAQ	93
11	FATE-Flow Client Command Line Interface	95
11.1	Usage	95
11.2	JOB_OPERATE	95
11.3	JOB	96
11.4	TASK_OPERATE	97
11.5	TRACKING	97
12	FATE-Flow REST API	105
12.1	DataAccess	105
12.2	Job	106
12.3	Table	119
13	Fate Flow Client SDK Guide	121
13.1	Usage	121
13.2	Job Operations	121
13.3	Component Operations	123
13.4	Data Operations	126
13.5	Task Operations	127
13.6	Model Operations	128
13.7	Tag Operations	131
13.8	Table Operations	132
13.9	Queue Operations	133
14	FATE-Flow Client Command Line Interface v2 Guide	135
14.1	Usage	135
14.2	Init	136
14.3	Job	136
14.4	Component (TRACKING)	139
14.5	Model	142
14.6	Tag	146
14.7	Data	147
14.8	Task	148
14.9	Table	149
14.10	Queue	150

15 FATE Pipeline	151
15.1 A FATE Job is A Directed Acyclic Graph	151
15.2 Install Pipeline	151
15.3 Interface of Pipeline	152
15.4 Build A Pipeline	153
15.5 Init Runtime JobParameters	154
15.6 Run A Pipeline	154
15.7 Query on Tasks	154
15.8 Deploy Components	154
15.9 Predict with Pipeline	155
15.10 Save and Recovery of Pipeline	155
15.11 Summary Info of Pipeline	155
15.12 Upload Data	155
15.13 Pipeline vs. CLI	156
16 FATE Test	157
16.1 quick start	157
16.2 develop install	158
16.3 command types	158
16.4 configuration by examples	158
16.5 Testsuite	159
16.6 Benchmark Quality	162
16.7 performance	167
16.8 data	168
16.9 full command options	171
17 Developing guides	177
17.1 Develop a runnable algorithm module of FATE	177
17.2 Start a modeling task	183
18 Computing API	185
19 Federation API	195
19.1 Low level api	195
19.2 user api	196
20 Params	199
21 Materials	223
21.1 Architecture	223
21.2 Workshop and Conference	223
21.3 Salon	223
Python Module Index	225
Index	227

FATE (Federated AI Technology Enabler) is an open-source project initiated by Webank's AI Department to provide a secure computing framework to support the federated AI ecosystem. It implements secure computation protocols based on homomorphic encryption and multi-party computation (MPC). It supports federated learning architectures and secure computation of various machine learning algorithms, including logistic regression, tree-based algorithms, deep learning and transfer learning.

<https://fate.fedai.org>

FATE STAND-ALONE DEPLOYMENT GUIDE

Server Configuration;

The stand-alone version provides 2 deployment methods, which can be selected according to your actual situation:

- Install FATE using Docker (*Recommended*)
- Install FATE in Host

You can also refer to [Chinese guide](#)

1.1 1) Install FATE using Docker*(Recommended)*

It is strongly recommended to use docker, which greatly reduces the possibility of encountering problems.

1. The host needs to be able to access the external network, pull the installation package and docker image from the public network.
2. Dependent on [docker](#), docker recommended version is 18.09, you can use the following command to verify the docker environment: `docker --version`, `docker start` and `stop` and other Please refer to: `docker --help`.
3. Keep the 8080 port accessible before executing. If you want to execute again, please delete the previous container and image with the docker command.

please follow the below step:

Please replace `${version}` below with the real version you want to use refer to version of FATE in [fate.env](#).

```
#Get code
wget https://webank-ai-1251170195.cos.ap-guangzhou.myqcloud.com/docker_standalone_
↪fate_${version}.tar.gz
tar -xzf docker_standalone_fate_${version}.tar.gz

#Execute the command
cd docker_standalone_fate_${version}
bash install_standalone_docker.sh
```

1. Test

- Unit Test

```
CONTAINER_ID=`docker ps -aqf "name=fate"`
docker exec -t -i ${CONTAINER_ID} bash
bash ./python/federatedml/test/run_test.sh
```

If success, the screen shows like blow:

```
there are 0 failed test
```

- Toy_example Test

```
CONTAINER_ID=`docker ps -aqf "name=fate"`  
docker exec -t -i ${CONTAINER_ID} bash  
python ./examples/toy_example/run_toy_example.py 10000 10000 0
```

If success, the screen shows like blow:

```
success to calculate secure_sum, it is 2000.0
```

2. Install FATE-Client and FATE-Test

To conveniently interact with FATE, we provide tools [FATE-Client](#) and [FATE-Test](#).

Install FATE-Client and FATE-Test with the following commands:

```
pip install fate-client  
pip install fate-test
```

There are a few algorithms under [examples](#) folder, try them out!

You can also experience the fateboard access via a browser: [Http://hostip:8080](http://hostip:8080).

1.2 2) Install FATE in Host

1. Check whether the local 8080,9360,9380 port is occupied.

```
netstat -apln|grep 8080  
netstat -apln|grep 9360  
netstat -apln|grep 9380
```

2. Download the compressed package of stand-alone version and decompress it.

Please replace `${version}` below with the real version you want to use refer to version of FATE in [fate.env](#).

```
wget https://webank-ai-1251170195.cos.ap-guangzhou.myqcloud.com/standalone_fate_  
↪master_${version}.tar.gz  
tar -xvzf standalone_fate_master_${version}.tar.gz
```

3. Enter FATE directory and execute the init.sh.

Please replace `${version}` below with the real version you want to use refer to version of FATE in [fate.env](#).

```
cd standalone_fate_master_${version}  
sh init.sh init
```

4. Test

Please replace `${version}` below with the real version you want to use refer to version of FATE in [fate.env](#).

- Unit Test

```
cd standalone_fate_master_${version}  
source bin/init_env.sh  
bash ./python/federatedml/test/run_test.sh
```

If success, the screen shows like blow:

```
there are 0 failed test
```

- Toy_example Test

```
cd standalone_fate_master_${version}
source bin/init_env.sh
python ./examples/toy_example/run_toy_example.py 10000 10000 0
```

If success, the screen shows like blow:

```
success to calculate secure_sum, it is 2000.0
```

5. Install FATE-Client and FATE-Test

To conveniently interact with FATE, we provide tools [FATE-Client](#) and [FATE-Test](#).

Install FATE-Client and FATE-Test with the following commands:

```
python -m pip install fate-client
python -m pip install fate-test
```

There are a few algorithms under [examples](#) folder, try them out!

You can also experience the fateboard access via a browser: [Http://hostip:8080](http://hostip:8080).

FATE CLUSTER DEPLOYMENT GUIDE

The Cluster version provides four deployment methods, which can be selected according to your actual situation:

- Install Cluster [Chinese guide](#)
- Install AllinOne [Chinese guide](#)
- Install Exchange Step By Step [Chinese guide](#)

2.1 1. General Introduction

2.1.1 1.1 System Introduction

1FATE

FATE (Federated AI Technology Enabler) is an open source project initiated by the AI department of WeBank. It provides a secure computing framework based on data privacy protection and provides strong secure computing support for machine learning, deep learning, and migration learning algorithms. The security bottom layer supports a variety of multi-party secure computer mechanisms such as homomorphic encryption, secret sharing, and hashing. The algorithm layer supports logistic regression, boosting, and federated migration learning in the multi-party secure computing mode.

2EggRoll

Eggroll is a large-scale distributed architecture suitable for machine learning and deep learning, including computing, storage and communication modules. Provide bottom support for FATE framework.


3FATE Official Website <https://fate.fedai.org/>

This article will introduce the deployment of FATE cluster using ansible deployment script.

2.1.2 1.2. Component Description

2.1.3 1.3. System Structure

Example deployment in two parties

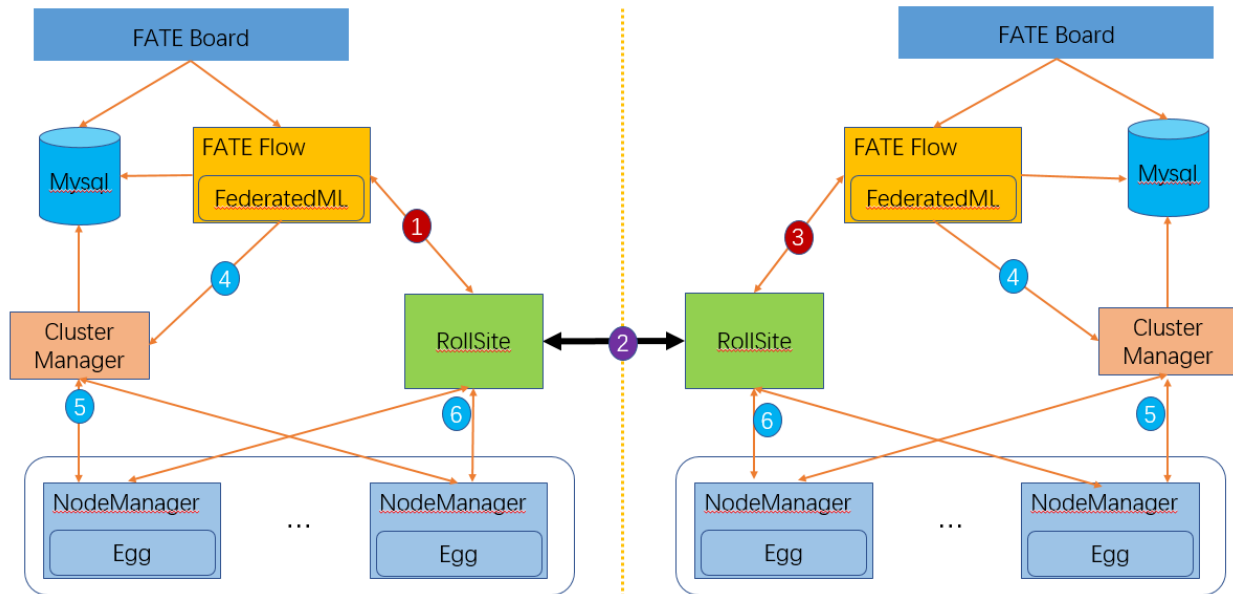

1. Identify 1, 2, 3, [fateflow](#) to initiate tasks, synchronize task information to all parties through [rollsite](#), during which [fateflow](#) will detect the running status of all parties.
2. Identify 4, 5, 6, [eggroll](#) task initiation and scheduling calculation, and communicate with the peer through [rollsite](#).

2.2 Detailed Design

2.2.1 2.1.Deployment Planning

In this example, there is only one host on each end, and multiple hosts on each end. Currently, only nodemanager multi-node deployment is supported, and other components are single-node.

Remarks:Involving exchange instructions will use 192.168.0.88 to represent its IP, but this example does not involve exchange deployment.

2.2.2 2.2.Host Resources And Operating System Requirements

2.2.3 2.3.Network Requirements

2.3 3. Basic Environment Configuration

2.3.1 3.1 Hostname Configuration

1) Modify the host name

Execute under the 192.168.0.1 root user:

```
hostnamectl set-hostname VM_0_1_centos
```

Execute under the 192.168.0.2 root user:

```
hostnamectl set-hostname VM_0_2_centos
```

2) Add host mapping

Execute under the root user of the target server (192.168.0.1 192.168.0.2):

```
vim /etc/hosts
```

```
192.168.0.1 VM_0_1_centos
```

```
192.168.0.2 VM_0_2_centos
```

2.3.2 3.2 Close selinux

Execute under the root user of the target server (192.168.0.1 192.168.0.2):

Confirm whether selinux is installed

Centos system execution: `rpm -qa | grep selinux`

If selinux has been installed, execute: `setenforce 0`

2.3.3 3.3 Modify Linux System Parameters

Execute under the root user of the target server (192.168.0.1 192.168.0.2):

1. Clean up the 20-nproc.conf file

```
cd /etc/security/limits.d
```

```
ls -lrt 20-nproc.conf
```

Existence: `mv 20-nproc.conf 20-nproc.conf_bak`

1. `vim /etc/security/limits.conf`

```
* soft nofile 65535
```

```
* hard nofile 65535
```

```
* soft nproc 65535
```

```
* hard nproc 65535
```

Log in again, `ulimit -a` to check whether it takes effect

2.3.4 3.4 Turn Off The Firewall

Execute under the root user of the target server (192.168.0.1 192.168.0.2)

Centos System:

```
systemctl disable firewalld.service
```

```
systemctl stop firewalld.service
```

```
systemctl status firewalld.service
```

2.3.5 3.5 Software Environment Initialization

1) Create User

Execute under the root user of the target server (192.168.0.1 192.168.0.2)

```
groupadd -g 6000 apps
useradd -s /bin/bash -g apps -d /home/app app
passwd app
```

2) Configure sudo

Execute under the root user of the target server (192.168.0.1 192.168.0.2)

```
vim /etc/sudoers.d/app
```

```
app ALL=(ALL) ALL
```

```
app ALL=(ALL) NOPASSWD: ALL
```

```
Defaults !env_reset
```

2.3.6 3.6 Increase Virtual Memory

Target server (192.168.0.1 192.168.0.2) root user execution

When used in a production environment, 128G of virtual memory needs to be added for memory calculations. Check whether the storage space is sufficient before execution.

Note: dd takes a long time to execute, please be patient

```
cd /data
dd if=/dev/zero of=/data/swapfile128G bs=1024 count=134217728
mkswap /data/swapfile128G
swapon /data/swapfile128G
cat /proc/swaps
echo '/data/swapfile128G swap swap defaults 0 0' >> /etc/fstab
```

2.3.7 3.7 Install Dependent Packages

Target server (192.168.0.1 192.168.0.2) root user execution

```
#Install basic dependencies
#centos
yum install -y gcc gcc-c++ make openssl-devel gmp-devel mpfr-devel libmpc-devel
↪libaio numactl autoconf automake libtool libffi-devel
#ubuntu
apt-get install -y gcc g++ make openssl libgmp-dev libmpfr-dev libmpc-dev libaio1
↪libaio-dev numactl autoconf automake libtool libffi-dev
#If there is an error, you need to solve the yum source problem.
```

(continues on next page)


(continued from previous page)

```
#Install ansible and process management dependency packages
#centos
yum install -y ansible
#ubuntu
apt-get install -y ansible

#If there is an error and the server has an external network, there is no need to
↳solve the problem of incomplete yum source, execute:
#centos
yum install -y epel-release
#Add a more comprehensive third-party source, and then reinstall ansible jq supervisor
```

2.4 4.Project Deployment

2.4.1 4.1 Deployment Diagram

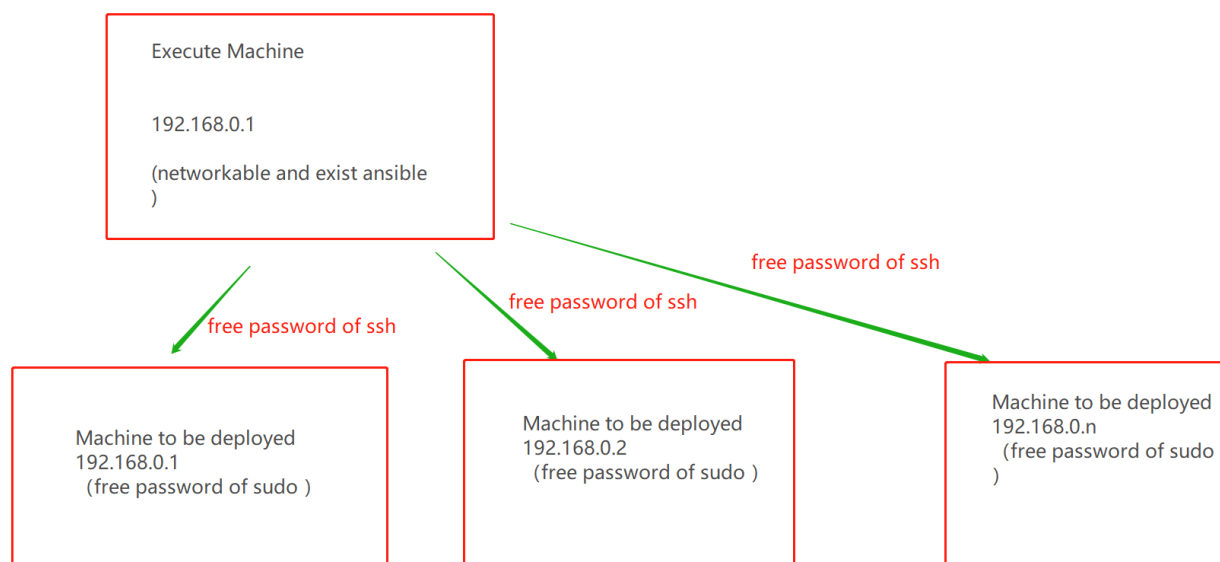

2.4.2 4.2 System Check

Execute under the target server (192.168.0.1 192.168.0.2) app user

```
#Virtual memory, size is not less than 128G, if not satisfied, please refer to
↳section 3.6 to reset
cat /proc/swaps
Filename      Type      Size      Used      Priority
/data/swapfile128G file 134217724 384      -1

#File handle number, not less than 65535, if not satisfied, please refer to chapter 3.
↳3 to reset
```

(continues on next page)

(continued from previous page)

```

ulimit -n
65535

#The number of user processes, not less than 64000, if not satisfied, please refer to
↪chapter 3.3 to reset
ulimit -u
65535

#Check whether the process has fate process residue, if any, you need to stop the
↪service
ps -ef| grep -i fate

netstat -tlnp | grep 4670
netstat -tlnp | grep 4671
netstat -tlnp | grep 9370
netstat -tlnp | grep 9371
netstat -tlnp | grep 9360
netstat -tlnp | grep 8080
netstat -tlnp | grep 3306

#Check the deployment directory, if necessary, mv first
ls -ld /data/projects/fate
ls -ld /data/projects/data
ls -ld /data/projects/snmp

#Check the supervisord configuration file, if any, you need to mv or delete it
ls -lrt /data/projects/common/supervisord/supervisord.d/fate-*.conf

```

2.4.3 4.3 Obtain The Project

Execute under the app user of the target server (192.168.0.1 with external network environment)

Enter the /data/projects/ directory of the execution node and execute:

```

#Note: URL links have line breaks, please make sure to arrange them in one line when
↪copying
cd /data/projects/
wget https://webank-ai-1251170195.cos.ap-guangzhou.myqcloud.com/ansible_nfate_1.6.0_
↪release-1.0.0.tar.gz
tar xzf ansible_nfate_1.6.0_release-1.0.0.tar.gz

```

2.4.4 4.4 Configuration File Modification And Example

4.4.1 Initial Configuration File

```

cd ansible-nfate-*
#init.sh file does not need to be modified, mainly to assist in generating some
↪configuration files

```

(continues on next page)

(continued from previous page)

```
#Production environment plus prod parameter execution
sh ./tools/init.sh prod

>sh ./tools/init.sh prod
clean old config
init environments/prod
init var_files/prod
init project_prod.yml
```

4.4.2 Certificate Production Configuration (optional)

1) Certificate Production

```
vi /data/projects/ansible-nfate-1.*/tools/make.sh

#1. The custom security certificate needs to be deployed at both ends at the same_
↪time, and only one end needs to be manually processed. The manual processing part_
↪will not be introduced temporarily.
#2. The security certificate supports the following deployment methods:
    1) Deploy host+guest, host and guest use secure certificate communication.
    2) Deploy host+exchange+guest, where host and exchange use secure certificates_
↪to communicate, and guest and exchange communicate normally.
    3) Deploy host+exchange+guest, where guest and exchange use secure certificates_
↪to communicate, and host and exchange communicate normally.

guest_host="192.168.0.1" ---Modify according to the actual IP
host_host="192.168.0.2" ---Modify according to the actual IP
exchange_host="192.168.0.88" --- Modify according to the actual IP, this example does_
↪not need to be modified without deployment
```

2) Execute Script To Make Certificate

```
cd tools
sh ./make.sh
```

Certificate files will be generated **in** the keys/host **and** guest directories.

3) Copy The Certificate To The Deployment Directory

```
sh cp-keys.sh host guest
```

The certificate file will be copied to the roles/eggroll/files/keys directory

Special Note:

1. Currently, script deployment only supports 2 parties to **set** up certificate_
↪authentication. (host&guest, host&exchange, guest&exchange)

4.4.3 Modify Configuration File

1. Modify The Initialization Host IP

```
vi /data/projects/ansible-nfate-1.*/environments/prod/hosts

#ansible format configuration file
[fate] ---Fill the host IP to be deployed into the fate group
192.168.0.1
192.168.0.2

[deploy_check] --- Fill in the deploy_check group with the local IP that executes
↪ansible
192.168.0.1

[all:vars]
ansible_connection=ssh
ansible_ssh_port=22 --- Modify according to actual situation
ansible_ssh_user=app
#ansible_ssh_pass=test ---If you have not done a password-free login, you need to
↪provide a password
##method: sudo or su
ansible_become_method=sudo
ansible_become_user=root
ansible_become_pass= --- If each host has not done secret-free sudo, the root
↪password must be filled
```

1. Modify The Deployment Mode

```
vi /data/projects/ansible-nfate-1.*/var_files/prod/fate_init

#Only modify the following parameters, other parameters remain unchanged by default
deploy_mode: "install" --- The default is empty, modified to install, which means a
↪new deployment
```

3) Modify Host Side Parameters

Note: The default is not to enable the configuration of the security certificate. If you enable the security certificate communication, you need to set `server_secure`, `client_secure`, `is_secure` to true, and the port corresponding to `is_secure` to 9371

```
#If you don't deploy host, you don't need to modify
#Except nodemanager can set multiple IPs, all others are single IP
vi /data/projects/ansible-nfate-1.*/var_files/prod/fate_host

host:
  partyid: 10000 ---host partyid, modify according to actual plan
  rollsite:
    enable: True
    ips: ---IP list, currently rollsite only supports deployment to one server
    -192.168.0.1
    port: 9370 --- grpc port
    secure_port: 9371 ---grpcs port
    pool_size: 600 ---thread pool size,Recommended as: min(1000 + len(party_ids) *
↪200, 5000)
    max_memory: ---rollsite process JVM memory parameter, the default is 1/4 of the
↪physical memory, which can be set according to the actual situation, such as 12G,
↪if it is a machine dedicated to rollsite, configure it to 75% of the physical
↪memory.
```

(continues on next page)

(continued from previous page)

```

server_secure: False ---As a server, turn on the security certificate,
↪verification, do not use the security certificate by default
client_secure: False ---As a client, use a certificate to initiate a security,
↪request, not using a security certificate by default
default_rules: ---This party points to the IP and port routing configuration of,
↪exchange or other parties
  -name: default
    ip: 192.168.0.2 ---exchange or peer party rollsite IP
    port: 9370 ---exchange or opposite party rollsite port, generally default,
↪9370, which means no security certificate deployment; if you need to enable,
↪security certificate communication, it should be set to 9371;
    is_secure: False ---Whether to use secure authentication communication; it,
↪needs to be used in combination with server_secure or client_secure. When all three,
↪are true, it means to use secure authentication communication with the next hop,
↪rollsite. At the same time, the previous parameter port needs to be set to 9371;
↪not used The default security certificate is sufficient.
  rules: ---The party's own routing configuration
    -name: default
      ip: 192.168.0.1
      port: 9370
    -name: fateflow
      ip: 192.168.0.1
      port: 9360
clustermanager:
  enable: True
  ips:
    -192.168.0.1 --- Only support the deployment of one host
  port: 4670
  cores_per_node: 16 ---Nodemanager node CPU core number, multiple nodemanager,
↪nodes are set according to the minimum number of CPU cores
nodemanager:
  enable: True
  ips: ---Support multiple deployment
    -192.168.0.1
    -192.168.0.x
  port: 4671
eggroll:
  dbname: "eggroll_meta"
  egg: 2
fate_flow:
  enable: True
  ips:
    -192.168.0.1 ---Only support the deployment of one host
  grpcPort: 9360
  httpPort: 9380
  dbname: "fate_flow"
fateboard:
  enable: True
  ips:
    -192.168.0.1 ---Only support the deployment of one host
  port: 8080
  dbname: "fate_flow"
mysql:
  enable: True
  ips:
    -192.168.0.1 ---Only support the deployment of one host
  port: 3306

```

(continues on next page)

(continued from previous page)

```

dbuser: "fate"
dbpasswd: "fate_deV2999"
zk:
  enable: False
  lists:
    -ip: 192.168.0.1
      port: 2181
  use_acl: false
  user: "fate"
  passwd: "fate"
servings:
  ip: 192.168.0.2
  port: 8000

```

4) Modify The Guest Parameters

Note: The default is not to enable the configuration of the security certificate. If you enable the security certificate communication, you need to set `server_secure`, `client_secure`, `is_secure` to true, and the port corresponding to `is_secure` to 9371.

```

#If you don't deploy the guest party, you don't need to modify it
#Except nodemanager can set multiple IPs, all others are single IP
vi /data/projects/ansible-nfate-1.*/var_files/prod/fate_guest

guest:
  partyid: 9999 ---Modify according to actual plan
  rollsite:
    enable: True
    ips: ---IP list, currently rollsite only supports deployment to one server
    -192.168.0.2
    port: 9370 --- grpc port
    secure_port: 9371 ---grpcs port
    pool_size: 600 ---thread pool size,Recommended as: min(1000 + len(party_ids) *
↪200, 5000)
    max_memory: ---rollsite process JVM memory parameter, the default is 1/4 of the
↪physical memory, which can be set according to the actual situation, such as 12G,
↪if it is a machine dedicated to rollsite, configure it to 75% of the physical
↪memory.
    server_secure: False ---As a server, turn on the security certificate
↪verification, do not use the security certificate by default
    client_secure: False ---As a client, use a certificate to initiate a security
↪request, not using a security certificate by default
    default_rules: ---This party points to the IP and port routing configuration of
↪exchange or other parties
    -name: default
      ip: 192.168.0.1 ---exchange or peer party rollsite IP
      port: 9370 ---exchange or opposite party rollsite port, generally default
↪9370, which means no security certificate deployment; if you need to enable
↪security certificate communication, it should be set to 9371;
      is_secure: False ---server_secure or client_secure is true, the next hop
↪rollsite pointed to is also turned on security authentication, this parameter needs
↪to be set to true, the previous parameter port needs to be set to 9371, and the
↪default is not to use a security certificate.
    rules: ---The party's own routing configuration
    -name: default
      ip: 192.168.0.2
      port: 9370

```

(continues on next page)

(continued from previous page)

```

-name: fateflow
  ip: 192.168.0.2
  port: 9360
clustermanager:
  enable: True
  ips: ---Only support the deployment of one host
  -192.168.0.2
  port: 4670
  cores_per_node: 16 ---Nodemanager node CPU core number, multiple nodemanager_
↪nodes are set according to the minimum number of CPU cores
nodemanager:
  enable: True
  ips: ---Support the deployment of multiple hosts
  -192.168.0.2
  -192.168.0.x
  port: 4671
eggroll:
  dbname: "eggroll_meta"
  egg: 2
fate_flow:
  enable: True
  ips: ---Only support the deployment of one host
  -192.168.0.2
  grpcPort: 9360
  httpPort: 9380
  dbname: "fate_flow"
fateboard:
  enable: True
  ips: ---Only support the deployment of one host
  -192.168.0.2
  port: 8080
  dbname: "fate_flow"
mysql:
  enable: True
  ips: ---Only support the deployment of one host
  -192.168.0.2
  port: 3306
  dbuser: "fate"
  dbpasswd: "fate_deV2999"
zk:
  enable: False
  lists:
  -ip: 192.168.0.2
    port: 2181
  use_acl: false
  user: "fate"
  passwd: "fate"
servings:
  ip: 192.168.0.2
  port: 8000

```

5) Modify Exchange Parameters

Note: The default is not to enable the configuration of the security certificate. If you enable the security certificate communication, you need to set `server_secure`, `client_secure`, `is_secure` to true, and the port corresponding to `is_secure` to 9371.

```
#Do not deploy exchange without modification
vi /data/projects/ansible-nfate-1.*/var_files/prod/fate_exchange

exchange:
  enable: False - The deployment of exchange needs to be modified to True
  rollsite:
    ips:
      -192.168.0.88
    port: 9370
    secure_port: 9371 ---grpcs port
    pool_size: 600 ---thread pool size,Recommended as: min(1000 + len(party_ids) *
↪200, 5000)
    max_memory: ---rollsite process JVM memory parameter, the default is 1/4 of the
↪physical memory, which can be set according to the actual situation, such as 12G,
↪if it is a machine dedicated to rollsite, configure it to 75% of the physical
↪memory.
    server_secure: False ---As a server, turn on the security certificate
↪verification, do not use the security certificate by default
    client_secure: False ---As a client, use a certificate to initiate a security
↪request, not using a security certificate by default
    partys: --- Routing configuration pointing to each party
    -id: 10000
    rules:
      -name: default
      ip: 192.168.0.1
      port: 9370 ---corresponding to the party rollsite port, generally the default
↪is 9370, which means that there is no security certificate communication; if you
↪need to open the security certificate communication, it should be set to 9371;
      is_secure: False ---server_secure or client_secure is true, the next hop
↪rollsite pointed to is also turned on security authentication, this parameter needs
↪to be set to true, the previous parameter port needs to be set to 9371, and the
↪default is not to use a security certificate.
    -id: 9999
    rules:
      -name: default
      ip: 192.168.0.2
      port: 9370 ---corresponding to the party rollsite port, generally the default
↪is 9370, that is, communication without a security certificate; if you need to
↪enable communication with a security certificate, set it to 9371;
      is_secure: False ---server_secure or client_secure is true, the next hop
↪rollsite pointed to is also turned on security authentication, this parameter needs
↪to be set to true, the previous parameter port needs to be set to 9371, and the
↪default is not to use a security certificate.
```

2.4.5 4.5 Deployment

After modifying the corresponding configuration items according to the above configuration meaning, then execute the deployment script:

```
#Relative ansible-nfate-* directory
cd /data/projects/ansible-nfate-1.*

#Production environment plus prod parameter execution
nohup sh ./boot.sh prod -D> logs/boot.log 2>&1 &
```

The deployment log is output in the logs directory, and check whether there is an error in real time:

```
#Relative ansible-nfate-* directory
cd logs
tail -f ansible.log (check the deployment in real time, if there is no such log file,
↳you need to check whether ansible is installed)

List of check items fail prompt:
1. "Warning: now swap is 0, need to turn up"
   ---The virtual memory is not set, please refer to the previous chapter to set it,
↳not less than 128G.
2. "Warning: key fate process exists, please has a check and clean"
   ---The environment has not been cleaned up, and the previously deployed fate
↳process needs to be stopped.
3. "Warning: these ports: 4670 4671 9360 9370 9380 have been used"
   ---The environment has not been cleaned up, and the previously deployed fate
↳process needs to be stopped.
4. "Warning: if reinstall mysql, please stop mysql, and rename /etc/my.cnf"
   ---mysql did not stop, it needs to be stopped. If there is a /etc/my.cnf file, mv
↳needs to be renamed.
5. "Warning: please rename /data/projects/fate"
   ---The fate directory exists, you need to mv first.
6. "Warning: please rename /data/projects/data/fate/mysql"
   ---/data/projects/data exists, mv is required.
7. "Warning: supervisor_fate_conf exists, please remove ls /data/projects/common/
↳supervisord/supervisord.d/fate-*.conf"
   --- The /data/projects/common directory exists, and mv is required.
```

Restart after fateflow deployment:

```
#Because fate_flow depends on more components, there may be exceptions in startup.
↳The processing is as follows:
netstat -tlnp | grep 9360
If there is no port, restart fateflow:
sh service.sh stop fate-fateflow
sh service.sh start fate-fateflow
```

2.4.6 4.6 Problem Location

1. Eggroll log

```
/data/logs/fate/eggroll/bootstrap.clustermanager.err
/data/logs/fate/eggroll/logs/eggroll/clustermanager.jvm.err.log
/data/logs/fate/eggroll/logs/eggroll/nodemanager.jvm.err.log
/data/logs/fate/eggroll/logs/eggroll/bootstrap.nodemanager.err
/data/logs/fate/eggroll/logs/eggroll/bootstrap.rollsite.err
/data/logs/fate/eggroll/logs/eggroll/rollsite.jvm.err.log
```

1. fateflow log

```
/data/logs/fate/python/logs/fate_flow/
```

1. fateboard log

```
/data/logs/fate/fate/fateboard/logs
```

2.5 5.Test

2.6 5.1 Toy_example Deployment Verification

For this test you need to set 3 parameters: guest_partyid, host_partyid, work_mode.

2.6.1 5.1.1 Unilateral Test

1) Execute on 192.168.0.1, guest_partyid and host_partyid are both set to 10000:

```
source /data/projects/fate/bin/init_env.sh
cd /data/projects/fate/examples/toy_example/
python run_toy_example.py 10000 10000 1
```

Note: If there is no output for more than 1 minute, it indicates that there is a problem with the deployment. You need to look at the log to locate the problem.

A result similar to the following indicates success:

```
"2020-04-28 18:26:20,789-secure_add_guest.py[line:126]-INFO: success to calculate secure_sum, it is
1999.9999999999998"
```

2) Execute on 192.168.0.2, guest_partyid and host_partyid are both set to 9999:

```
source /data/projects/fate/bin/init_env.sh
cd /data/projects/fate/examples/toy_example/
python run_toy_example.py 9999 9999 1
```

Note: If there is no output for more than 1 minute, it indicates that there is a problem with the deployment. You need to look at the log to locate the problem.

A result similar to the following indicates success:

```
"2020-04-28 18:26:20,789-secure_add_guest.py[line:126]-INFO: success to calculate secure_sum, it is
1999.9999999999998"
```

2.6.2 5.1.2 Bilateral Testing

Select 9999 as the guest and execute on 192.168.0.2:

```
source /data/projects/fate/bin/init_env.sh
cd /data/projects/fate/examples/toy_example/
python run_toy_example.py 9999 10000 1
```

A result similar to the following indicates success:

```
"2020-04-28 18:26:20,789-secure_add_guest.py[line:126]-INFO: success to calculate secure_sum, it is
1999.9999999999998"
```

2.7 5.2 Minimize Test

2.7.1 5.2.1 Upload Preset Data:

Execute on 192.168.0.1 and 192.168.0.2 respectively:

```
source /data/projects/fate/bin/init_env.sh
cd /data/projects/fate/examples/scripts/
python upload_default_data.py -m 1
```

For more details, please refer to [Script README](#)

2.7.2 5.2.2 Fast Mode:

Please make sure that both the guest and host have uploaded the preset data through the given script.

In the fast mode, the minimization test script will use a relatively small data set, that is, the breast data set containing 569 data.

Select 9999 as the guest and execute on 192.168.0.2:

```
source /data/projects/fate/bin/init_env.sh
cd /data/projects/fate/examples/toy_example/
#Unilateral test
python run_task.py -m 1 -gid 9999 -hid 9999 -aid 9999 -f fast
#Bilateral test
python run_task.py -m 1 -gid 9999 -hid 10000 -aid 10000 -f fast
```

Some other parameters that may be useful include:

1. -f: File type used. “fast” represents the breast data set, and “normal” represents the default credit data set.
2. -add_sbt: If it is set to 1, the secureboost task will be started after lr is run. If it is set to 0, the secureboost task will not be started. If this parameter is not set, the system defaults to 1.

If the word “success” is displayed in the result after a few minutes, it indicates that the operation has run successfully. If “FAILED” appears or the program is stuck, it means the test has failed.

2.7.3 5.2.3 Normal Mode

Just replace “fast” with “normal” in the command, and the rest is the same as in fast mode.

2.8 5.3 Fateboard Testing

Fateboard is a web service. If the fateboard service is successfully started, you can view the task information by visiting <http://192.168.0.1:8080> and <http://192.168.0.2:8080>. If there is a firewall between the local office computer and the server, you need to enable it.

2.9 6.System Operation And Maintenance

2.9.1 6.1 Service Management

Execute under the target server (192.168.0.1 192.168.0.2) app user

2.9.2 6.1.1 Service Management

```
cd /data/projects/common/supervisord
```

Start/Stop/Restart/View all:

```
#Note: Because mysql is a basic component, the startup is slow. It is recommended to
↪restart all components first, then start mysql first, and then start other
↪components
sh service.sh start/stop/restart/status all

#Note: Because fateflow depends on many components, restarting all operations may
↪cause fateflow to start abnormally. The processing is as follows:
netstat -tlnp | grep 9360
If there is no port, restart fateflow:
sh service.sh stop fate-fateflow
sh service.sh start fate-fateflow
```

Start/stop/restart/view a single module (optional: clustermanager, nodemanager, rollsite, fateflow, fateboard, mysql):

```
sh service.sh start/stop/restart/status fate-clustermanager
```

2.10 6.2 View Process And Port

Execute under the target server (192.168.0.1 192.168.0.2) app user

2.10.1 6.2.1 View Process

```
#Check whether the process is started according to the deployment plan
ps -ef | grep -i clustermanager
ps -ef | grep -i nodemanager
ps -ef | grep -i rollsite
ps -ef | grep -i fate_flow_server.py
ps -ef | grep -i fateboard
```

2.10.2 6.2.2 View Process Port

```
#Check whether the process port exists according to the deployment plan  
#clustermanager  
netstat -tlnp | grep 4670  
#nodemanager  
netstat -tlnp | grep 4671  
#rollsite  
netstat -tlnp | grep 9370  
#fate_flow_server  
netstat -tlnp | grep 9360  
#fateboard  
netstat -tlnp | grep 8080
```

2.11 6.2.3 Service Log

2.11.1 6.2.4 File Directory Description

7. UNINSTALL

3.1 7.1 Description

Support the uninstallation of all services and the uninstallation of a single service.

3.2 7.2 Perform uninstall

```
cd /data/projects/ansible-nfate-1.*
sh ./uninstall.sh prod all

#Uninstall command description
sh ./uninstall.sh $arg1 $arg2
- The $arg1 parameter is the same as the parameter executed by init in step 4.4.1, ↵
↵and is test|prod.
- The $arg2 parameter is the selected service, the optional parameter is ↵
↵(all|mysql|eggroll|fate_flow|fateboard), all means uninstall all services.
```

3.3 8. Appendix

3.4 8.1 Eggroll Parameter Tuning

Configuration file path: /data/projects/fate/eggroll/conf/eggroll.properties

Configuration parameter: eggroll.session.processors.per.node

Assuming that the number of CPU cores (cpu cores) is c, the number of Nodemanagers is n, and the number of tasks that need to run simultaneously is p, then:

$\text{egg_num} = \text{eggroll.session.processors.per.node} = c * 0.8 / p$

partitions (roll pair partition number) = $\text{egg_num} * n$

PIPELINE EXAMPLES

4.1 Introduction

We provide some example scripts of running FATE jobs with [FATE-Pipeline](#).

Please refer to the document linked above for details on FATE-Pipeline and FATE-Flow CLI v2. DSL version of provided Pipeline examples can be found [here](#).

4.2 Quick Start

Here is a general guide to quick start a FATE job. In this guide, default installation location of FATE is `/data/projects/fate`.

1. (optional) create virtual env

```
python -m venv venv
source venv/bin/activate
pip install -U pip
```

2. install fate_client

```
# this step installs FATE-Pipeline, FATE-Flow CLI v2, and FATE-Flow SDK
pip install fate_client
pipeline init --help
```

3. provide server ip/port information of deployed FATE-Flow

```
# provide real ip address and port info to initialize pipeline
pipeline init --ip 127.0.0.1 --port 9380
# optionally, set log directory of Pipeline
cd /data/projects/fate/python/fate_client/pipeline
pipeline init --ip 127.0.0.1 --port 9380 --log-directory ./logs
```

4. upload data with FATE-Pipeline

Script to upload data can be found [here](#). User may modify file path and table name to upload arbitrary data following instructions in the script. For a list of available example data and general guide on table naming, please refer to this [guide](#).

```
# upload demo data to FATE data storage, optionally provide directory where
↳ deployed examples/data locates
cd /data/projects/fate
python examples/pipeline/demo/pipeline-upload.py --base /data/projects/fate
```

If upload job is invoked correctly, job id will be printed to terminal and an upload bar is shown. If FATE-Board is available, job progress can be monitored on Board as well.

```

UPLOADING:|||||
↪00%
2021-03-25 17:13:21.548 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:121 - Job id is 202103251713214312523
      Job is still waiting, time elapse: 0:00:01
2021-03-25 17:13:23Running component upload_0, time elapse: 0:00:03
2021-03-25 17:13:25.168 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:129 - Job is success!!! Job id is 202103251713214312523
2021-03-25 17:13:25.169 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:130 - Total time: 0:00:03
UPLOADING:|||||
↪00%
2021-03-25 17:13:25.348 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:121 - Job id is 202103251713251765644
      Job is still waiting, time elapse: 0:00:01
2021-03-25 17:13:27Running component upload_0, time elapse: 0:00:03
2021-03-25 17:13:29.480 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:129 - Job is success!!! Job id is 202103251713251765644
2021-03-25 17:13:29.480 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:130 - Total time: 0:00:04

```

4. run a FATE-Pipeline fit job

```

cd /data/projects/fate
python examples/pipeline/demo/pipeline-quick-demo.py

```

This quick demo shows how to build to a heterogeneous SecureBoost job using uploaded data from previous step. Note that data are uploaded to the same machine in the previous step. To run the below job with cluster deployment, make sure to first upload data to corresponding parties and set role information and job parameters accordingly [here](#). Progress of job execution will be printed as modules run. A message indicating final status (“success”) will be printed when job finishes. The script queries final model information when model training completes.

```

2021-03-25 17:13:51.370 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:121 - Job id is 202103251713510969875
      Job is still waiting, time elapse: 0:00:00
2021-03-25 17:13:52Running component reader_0, time elapse: 0:00:02
2021-03-25 17:13:54Running component dataio_0, time elapse: 0:00:05
2021-03-25 17:13:57Running component intersection_0, time elapse: 0:00:09
2021-03-25 17:14:01Running component hetero_secureboost_0, time elapse: 0:00:35
2021-03-25 17:14:27Running component evaluation_0, time elapse: 0:00:40
2021-03-25 17:14:32.446 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:129 - Job is success!!! Job id is 202103251713510969875
2021-03-25 17:14:32.447 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:130 - Total time: 0:00:41

```

5. (another example) run FATE-Pipeline fit and predict jobs

```

cd /data/projects/fate
python examples/pipeline/demo/pipeline-mini-demo.py

```

This [script](#) trains a heterogeneous logistic regression model and then runs prediction with the trained model.

```

2021-03-25 17:16:24.832 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:121 - Job id is 202103251716244738746
      Job is still waiting, time elapse: 0:00:00
2021-03-25 17:16:25Running component reader_0, time elapse: 0:00:02
2021-03-25 17:16:27Running component dataio_0, time elapse: 0:00:05
2021-03-25 17:16:30Running component intersection_0, time elapse: 0:00:09
2021-03-25 17:16:35Running component hetero_lr_0, time elapse: 0:00:38
2021-03-25 17:17:04.332 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:129 - Job is success!!! Job id is 202103251716244738746
2021-03-25 17:17:04.332 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:130 - Total time: 0:00:39

```

Once fit job completes, demo script will print coefficients and training information of model.

After having completed the fit job, script will invoke a predict job with the trained model. Note that Evaluation component is added to the prediction workflow. For more information on using FATE-Pipeline, please refer to this [guide](#).

```

2021-03-25 17:17:05.568 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:121 - Job id is 202103251717052325809
      Job is still waiting, time elapse: 0:00:01
2021-03-25 17:17:07Running component reader_1, time elapse: 0:00:03
2021-03-25 17:17:09Running component dataio_0, time elapse: 0:00:06
2021-03-25 17:17:12Running component intersection_0, time elapse: 0:00:10
2021-03-25 17:17:17Running component hetero_lr_0, time elapse: 0:00:15
2021-03-25 17:17:22Running component evaluation_0, time elapse: 0:00:20
2021-03-25 17:17:26.968 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:129 - Job is success!!! Job id is 202103251717052325809
2021-03-25 17:17:26.968 | INFO      | pipeline.utils.invoker.job_submitter:monitor_
↪job_status:130 - Total time: 0:00:21

```


UPLOAD DATA GUIDE

[]

Before start a modeling task, the data to be used should be uploaded. Typically, a party is usually a cluster which include multiple nodes. Thus, when we upload these data, the data will be allocated to those nodes.

5.1 Accepted Data Type

Data IO module accepts the following input data format and transforms them to desired output DTable.

dense input format input DTable's value item is a list of single element, e.g.

```
1.0,2.0,3.0,4.5
1.1,2.1,3.4,1.3
2.4,6.3,1.5,9.0
```

svm-light input format first item of input DTable's value is label, following by a list of complex "feature_id:value" items, e.g.

```
1 1:0.5 2:0.6
0 1:0.7 3:0.8 5:0.2
```

tag input format the input DTable's value is a list of tag, data io module first aggregates all tags occurred in input table, then changes all input line to one-hot representation in sorting the occurred tags by lexicographic order, e.g. assume values is

```
a c
a b d
```

after processing, the new values became:

```
1 0 1 0
1 1 0 1
```

tag:value input format the input DTable's value is a list of `tag:value`, like a mixed svm-light and tag input-format. data io module first aggregates all tags occurred in input table, then changes all input line to one-hot representation in sorting the occurred tags by lexicographic order, then fill the occur item with value. e.g. assume values is

```
a:0.2 c:1.5
a:0.3 b:0.6 d:0.7
```

after processing, the new values became:

```
0.2 0 0.5 0
0.3 0.6 0 0.7
```

5.2 Define upload data config file

Here is an example showing how to create a upload config file:

```
{
  "file": "examples/data/breast_hetero_guest.csv",
  "table_name": "hetero_breast_guest",
  "namespace": "experiment",
  "head": 1,
  "partition": 8,
  "work_mode": 0,
  "backend": 0
}
```

Field Specifications:

1. file: file path
2. table_name & namespace: Indicators for stored data table.
3. head: Specify whether your data file include a header or not
4. partition: Specify how many partitions used to store the data
5. work_mode: Specify current work mode: 0 for standalone, 1 for cluster
6. backend: Specify backend for job: 0 for EGGROLL, 1 for SPARK with RabbitMQ, 2 for SPARK with PULSAR

5.3 Upload Command

We use fate-flow to upload data. Starting at FATE ver1.5, [FATE-Flow Client Command Line](#) is recommended for interacting with FATE-Flow.

The command is as follows:

```
flow data upload -c dsl_test/upload_data.json
```

Meanwhile, user can still upload data using python script as in the older versions:

```
python ${your_install_path}/fate_flow/fate_flow_client.py -f upload -c dsl_test/
↪upload_data.json
```

Note: This step is needed for every data-provide party(i.e. Guest and Host).

After running this command, the following information is shown if it is success.

```
{
  "data": {
    "board_url": "http://127.0.0.1:8080/index.html#/dashboard?job_
↪id=202010131102075363217&role=local&party_id=0",
```

(continues on next page)

(continued from previous page)

```
    "job_dsl_path": "/data/projects/fate/jobs/202010131102075363217/job_dsl.json",
    "job_runtime_conf_path": "/data/projects/fate/jobs/202010131102075363217/job_
↪runtime_conf.json",
    "logs_directory": "/data/projects/fate/logs/202010131102075363217",
    "namespace": "experiment",
    "table_name": "breast_hetero_guest"
  },
  "jobId": "202010131102075363217",
  "retcode": 0,
  "retmsg": "success"
}
```

And as this output shown, table_name and namespace have been listed, which can be taken as input config in submit-runtime conf.

DSL & TASK SUBMIT RUNTIME CONF SETTING V1

[]

To make the modeling task more flexible, currently, FATE use its own domain-specific language(DSL) to describe modeling task. With usage of this DSL, modeling components such as data-io, feature-engineering and classification/regression module etc. can be combined as a Directed Acyclic Graph(DAG). Therefore, user can take and combine the algorithm components flexibly according to their needs.

In addition, each component has their own parameters to be configured. Also, the configuration may differ from party to party. For convenience, FATE configure all parameters for all parties and all components in one file. This guide will show you how to create such a configure file.

6.1 DSL Configure File

We use json file which is actually a dict as a dsl config file. The first level of the dict is always “components,” which indicates content in the dict are components in your modeling task.

```
{
  "components" : {
    ...
  }
}
```

Then each component should be defined on the second level. Here is an example of setting a component:

```
"dataio_0": {
  "module": "DataIO",
  "input": {
    "data": {
      "data": [
        "args.train_data"
      ]
    }
  },
  "output": {
    "data": ["train"],
    "model": ["dataio"]
  },
  "need_deploy": true
}
```

As the example shows, user define the component name as key of this module. Note this module name should end up with a “_num” where the num should start with 0.

6.1.1 Field Specification

module Specify which component to use. This field should strictly match the file name in federatedml/conf/setting_conf except the .json suffix.

input There are two types of input, data and model.

1. Data: There are three possible data_input type:

1. data: typically used in data_io, feature_engineering modules and evaluation.
2. train_data: Used in homo_lr, hetero_lr and secure_boost. If this field is provided, the task will be parse as a **fit** task
3. validate_data: If train_data is provided, this field is optional. In this case, this data will be used as validation set. If train_data is not provided, this task will be parsed as a **predict** or **transform** task.

2. Model: There are two possible model-input types:

1. model: This is a model input by the same type of component. For example, hetero_binning_0 run as a fit component, and hetero_binning_1 take model output of hetero_binning_0 as input so that can be used to transform or predict.

Here's an example showing this logic:

```
"hetero_feature_binning_1": {
  "module": "HeteroFeatureBinning",
  "input": {
    "data": {
      "data": [
        "dataio_1.validate_data"
      ]
    },
    "model": [
      "hetero_feature_binning_0.fit_model"
    ]
  },
  "output": {
    "data": ["validate_data"],
    "model": ["eval_model"]
  }
}
```

2. isometric_model: This is used to specify the model input from upstream components.

For example, feature selection will take feature binning as upstream model, since it will use information value as feature importance. Here's an example of feature selection component:

```
"hetero_feature_selection_0": {
  "module": "HeteroFeatureSelection",
  "input": {
    "data": {
      "data": [
        "hetero_feature_binning_0.train"
      ]
    },
    "isometric_model": [
```

(continues on next page)

(continued from previous page)

```

        "hetero_feature_binning_0.output_model"
    ],
    "output": {
        "data": ["train"],
        "model": ["output_model"]
    }
}

```

3. output: Same as input, two types of output may occur which are data and model.

1. Data: Specify the output data name
2. Model: Specify the output model name

You can take the above case as an example.

6.2 Submit Runtime Conf

Besides the dsl conf, user also need to prepare a submit runtime conf to set the parameters of each component.

initiator To begin with, the initiator should be specified in this runtime conf. Here is an example of setting initiator:

```

"initiator": {
    "role": "guest",
    "party_id": 10000
}

```

role All the roles involved in this modeling task should be specified. Each element in the role should contain role name and their party ids. The reason for ids are with form of list is that there may exist multiple parties in one role.

```

"role": {
    "guest": [
        10000
    ],
    "host": [
        10000
    ],
    "arbiter": [
        10000
    ]
}

```

role_parameters Those parameters that are differ from party to party, should be indicated here. Please note that each parameters should has the form of list. Inside the role_parameters, party names are used as key and parameters of these parties are values. Take the following structure as an example:

```

"guest": {
    "args": {
        "data": {
            "train_data": [
                {
                    "name": "1ca0d9eea77e11e9a84f5254005e961b",

```

(continues on next page)

(continued from previous page)

```

        "namespace": "arbiter-10000#guest-10000#host-10000#train_input
↪#guest#10000"
    }
    ]
    },
    "dataio_0": {
        "with_label": [
            true
        ],
        ...
    }
},
"host": {
    "args": {
        "data": {
            "train_data": [
                {
                    "name": "3de22bdaa77e11e99c5d5254005e961b",
                    "namespace": "arbiter-10000#guest-10000#host-10000#train_input
↪#host#10000"
                }
            ]
        }
    },
    "dataio_0": {
        ...
    }
    ...
}

```

As this example shows, for each party, the input parameters such as train_data, validate_data and so on should be list in args. The name and namespace above are table indicators for uploaded data.

Then, user can config parameters for each components. The component names should match names defined in the dsl config file. The content of each component parameters are defined in Param class located in federatedml/param.

algorithm_parameters If some parameters are the same among all parties, they can be set in algorithm_parameters. Here is an example showing how to do that.

```

"hetero_feature_binning_0": {
    ...
},
"hetero_feature_selection_0": {
    ...
},
"hetero_lr_0": {
    "penalty": "L2",
    "optimizer": "rmsprop",
    "eps": 1e-5,
    "alpha": 0.01,
    "max_iter": 10,
    "converge_func": "diff",
    "batch_size": 320,
    "learning_rate": 0.15,
    "init_param": {

```

(continues on next page)

(continued from previous page)

```

    "init_method": "random_uniform"
  },
  "cv_param": {
    "n_splits": 5,
    "shuffle": false,
    "random_seed": 103,
    "need_cv": false,
  }
}

```

Same with the form in role parameters, each key of the parameters are names of components that are defined in dsl config file.

After setting config files and submitting the task, fate-flow will combine the parameter list in role-parameters and algorithm parameters. If there are still some undefined fields, values in default runtime conf will be used. Then fate-flow will send these config files to their corresponding parties and start the federated modeling task.

6.3 Multi-host configuration

For multi-host modeling case, all the host's party ids should be list in the role field.

```

"role": {
  "guest": [
    10000
  ],
  "host": [
    10000, 10001, 10002
  ],
  "arbiter": [
    10000
  ]
}

```

Each parameter set for host should also be list in a list. The number of elements should match the number of hosts.

```

"host": {
  "args": {
    "data": {
      "train_data": [
        {
          "name": "hetero_breast_host_1",
          "namespace": "hetero_breast_host"
        },
        {
          "name": "hetero_breast_host_2",
          "namespace": "hetero_breast_host"
        },
        {
          "name": "hetero_breast_host_3",
          "namespace": "hetero_breast_host"
        }
      ]
    }
  }
}

```

(continues on next page)

(continued from previous page)

```
    }
  },
  "dataio_0": {
    "with_label": [false, false, false],
    "output_format": ["dense", "dense", "dense"],
    "outlier_replace": [true, true, true]
  }
}
```

The parameters set in algorithm parameters need not be copied into host role parameters. Algorithm parameters will be copied for every party.

DSL & TASK SUBMIT RUNTIME CONF SETTING V2

[]

To make the modeling task more flexible, currently, FATE uses its own domain-specific language(DSL) to describe modeling task. With usage of this DSL, modeling components such as data-io, feature-engineering and classification/regression module etc. can be combined as a Directed Acyclic Graph(DAG). Therefore, user can take and combine the algorithm components flexibly according to their needs.

In addition, parameters of each component need to be configured. Also, the configuration may vary from party to party. For convenience, FATE configure all parameters for all parties and all components in one file. This guide will show you how to create such a configure file.

Starting at FATE-1.5.0, V2 of dsl and submit conf is recommended, but user can still use old configuration method of [V1]

7.1 DSL Configure File

7.1.1 1. Overview

We use json file which is actually a dictionary as a dsl config file.

7.1.2 2. Components

- **definition:** components in your modeling task, always the first level of dsl dict.
- **example:**

```
{
  "components" : {
    ...
  }
}
```

- **explanation:**

Then each component should be defined on the second level. Here is an example of setting a component:

```
"dataio_0": {
  "module": "DataIO",
  "input": {
    "data": {
      "data": [
```

(continues on next page)

(continued from previous page)

```

        "reader_0.train_data"
    ]
}
},
"output": {
    "data": ["train"],
    "model": ["dataio"]
}
}

```

As the example shows, user define the component name as key of this module.

Please note that in DSL V2, all modeling task config should contain a **Reader** component to reader data from storage service, this component has “output” field only, like the following:

```

"reader_0": {
    "module": "Reader",
    "output": {
        "data": ["train"]
    }
}

```

7.1.3 3. Module

- **definition:** Specify which component to use.
- **explanation:** This field should strictly match the file name in python/federatedml/conf/setting_conf except the .json suffix.
- **example:**

```

"hetero_feature_binning_1": {
    "module": "HeteroFeatureBinning",
    ...
}

```

7.1.4 4. Input

- **definition:** There are two types of input, data and model.

4.1 Data Input

- **definition:** Data input from previous modules; there are four possible data_input type: 1. data: typically used in data_io, feature_engineering modules and evaluation. 2. train_data: uses in training components like HeteroLRHeteroSBT and so on. If this field is provided, the task will be parse as a **fit** task 3. validate_data: If train_data is provided, this field is optional. In this case, this data will be used as validation set. 4. test_data: specify the data used to predict, if this field is set up, the **model** also needs.

4.2 Model Input

- **definition:** Model input from previous modules; there are two possible model-input types:

1. **model:** This is a model input by the same type of component. For example, hetero_binning_0 run as a fit component, and hetero_binning_1 takes model output of hetero_binning_0 as input so that can be used to transform or predict. Here's an example showing this logic:

```
"hetero_feature_binning_1": {
  "module": "HeteroFeatureBinning",
  "input": {
    "data": {
      "data": [
        "dataio_1.validate_data"
      ]
    },
    "model": [
      "hetero_feature_binning_0.fit_model"
    ]
  },
  "output": {
    "data": ["validate_data"],
    "model": ["eval_model"]
  }
}
```

2. **isometric_model:** This is used to specify the model input from upstream components. For example, feature selection will take feature binning as upstream model, since it will use information value as feature importance. Here's an example of feature selection component:

```
"hetero_feature_selection_0": {
  "module": "HeteroFeatureSelection",
  "input": {
    "data": {
      "data": [
        "hetero_feature_binning_0.train"
      ]
    },
    "isometric_model": [
      "hetero_feature_binning_0.output_model"
    ]
  },
  "output": {
    "data": ["train"],
    "model": ["output_model"]
  }
}
```

4.3 Model Output

- **definition:** Same as input, two types of output may occur: which are data and model.

5.1 Data Output

- **definition:** data output, there are four types:

1. data: normal data output
2. train_data: only for Data Split
3. validate_data: only for Data Split
4. test_data only for Data Split

5.2 Model Output

- **definition:** model output, only use `model`

7.2 JOB RUNTIME CONFIG Guide (for version 1.5.x and above)

7.2.1 1. Overview

Job Runtime Conf configures job and module settings for all participants. Configurable values include:

7.2.2 2. DSL version

- **definition:** conf version, default 1, 2 is recommended
- **example:**

```
"dsl_version": "2"
```

7.2.3 3. Job Participants

3.1 Initiator

- **definition:** role and party_id of job initiator
- **example:**

```
"initiator": {  
  "role": "guest",  
  "party_id": 9999  
}
```

3.2 Role

- **definition:** Information on all participants
- **explanation:** each key-value pair in `role` represents a role type and corresponding party ids; `party_id` should be specified as list since multiple parties may take the same role in a job
- **examples**

```
"role": {
  "guest": [9999],
  "host": [10000],
  "arbiter": [10000]
}
```

7.2.4 4. System Runtime Parameters

- **definition:** main system configuration when running jobs

4.1 Configuration Applicable Range Policy

- `common`: applies to all participants
- `role`: applies only to specific participant; specify participant in `role :party_index` format; note that `role` configuration takes priority over `common`

```
"common": {
}

"role": {
  "guest": {
    "0": {
    }
  }
}
```

In the example above, configuration inside `common` applies to all participants; configuration inside `role-guest-0` only applies to participant `guest_0`

Note: current version does not perform strict checking on role-specific runtime parameters; `common` is suggested for setting runtime configuration

4.2 Configurable Job Parameters

Table 1: Configurable Job Parameters

Parameter Name	Default Value	Acceptable Values	Information
job_type	train	train, predict	job type
work_mode	0	0, 1	0 for standalone, 1 for cluster
backend	0	0, 1, 2	0 for EGGROLL, 1 for SPARK with RabbitMQ, 2 for SPARK with Pulsar
task_cores	4	positive integer	total cpu cores requested
task_parallelism	1	positive int	maximum number of tasks allowed to run in parallel
computing_partitions	same as task_cores	positive integer	partition number for table computing
eggroll_run		processors_per_node	configuration specific for EGGROLL computing engine; generally set automatically based on task_cores; if specified, task_cores value ineffective
spark_run		num-executors, executor-cores	configuration specific for SPARK computing engine; generally set automatically based on task_cores; if specified, task_cores value ineffective
rabbitmq_run		queue, exchange etc.	parameters for rabbitmq to set up queue, exchange, etc.; generally takes system default
federated_status_collect_type	PUSH	PUSH, PULL	way to collect federated job status; PUSH: participants report to initiator, PULL: initiator regularly queries from all participants
timeout	604800	positive int	time elapse (in second) for a job to timeout
model_id	-	-	id of model, needed for prediction task
model_version	-	-	version of model, needed for prediction task

Note: 1. Some types of `computing_engine`, `storage_engine`, and `federation_engine` are only compatible with each other. For examples, `SPARK computing_engine` only supports `HDFS storage_engine`.

2. Combination of `work_mode` and `backend` automatically determines which three engines will be used.

3. Developer may implement other types of engines and set new engine combinations in runtime conf.

4.3 Non-Configurable Job Parameters

Table 2: Non-configurable Job Parameters

Parameter Name	Default Value	Acceptable Values	Information
computing_engine	set automatically based on work_mode and backend	EGGROLL, SPARK, STANDALONE	engine for computation
storage_engine	set automatically based on work_mode and backend	EGGROLL, HDFS, STANDALONE	engine for storage
federation_engine	set automatically based on work_mode and backend	EGGROLL, RABBITMQ, STANDALONE, PULSAR	engine for communication among parties
federated_mode	set automatically based on work_mode and backend	SINGLE, MULTIPLE	federation mode

4.4 Example Job Parameter Configuration

1. **EGGROLL** conf example with default CPU settings:

```
"job_parameters": {
  "common": {
    "work_mode": 1,
    "backend": 0,
    "task_cores": 4
  }
}
```

2. **EGGROLL** conf example with manually specified CPU settings:

```
"job_parameters": {
  "common": {
    "job_type": "train",
    "work_mode": 1,
    "backend": 0,
    "eggroll_run": {
      "eggroll.session.processors.per.node": 2
    },
    "task_parallelism": 2,
    "computing_partitions": 8,
    "timeout": 36000,
  }
}
```

3. **SPARK With RabbitMQ** conf example with manually specified CPU settings:

```
"job_parameters": {
  "common": {
    "job_type": "train",
```

(continues on next page)

(continued from previous page)

```

    "work_mode": 1,
    "backend": 1,
    "spark_run": {
        "num-executors": 1,
        "executor-cores": 2
    },
    "task_parallelism": 2,
    "computing_partitions": 8,
    "timeout": 36000,
    "rabbitmq_run": {
        "queue": {
            "durable": true
        },
        "connection": {
            "heartbeat": 10000
        }
    }
}

```

4. SPARK With Pulsar conf example with default setting :

```

"job_parameters": {
    "common": {
        "job_type": "train",
        "work_mode": 1,
        "backend": 2,
        "spark_run": {
            "num-executors": 1,
            "executor-cores": 2
        }
    }
}

```

4.5 Resource Management

Starting at version 1.5.0, FATE-Flow implements improved, more fine-grained resource management policy on cpu cores, lifting restrictions on number of parallel tasks in previous versions.

4.5.1 Total Resource Setting

- resource comes from underlying engines; since current version does automatically obtain resource information from engines, FATE-Flow server obtains and register engine information to `t_engine_registry` from user-specified conf file `$PROJECT_BASE/conf/service_conf.yaml`
- `fate_on_eggsrolltotal_cores=cores_per_node*nodes`
- `fate_on_sparktotal_cores=cores_per_node*nodes`
- standalone use **STANDALONE_BACKEND_VIRTUAL_CORES_PER_NODE** from `$PROJECT_BASE/python/fate_flow/settings.py`
- separate computing resources for different engines
- above settings effective after restarting FATE-Flow server

4.5.2 Calculate Computing Resource

Calculate actual `task_run_cores` each task requests at computing engine, may not equal to the amount applied by resource manager

1. only set `task_cores` in job conf:
 - `task_run_cores(guest, host)max(task_cores / total_nodes, 1) * total_nodes`
 - `task_run_cores(arbiter)max(1 / total_nodes, 1) * total_nodes`
 - FATE-Flow will automatically convert `task_cores` value into engine-specific configuration: `eggroll.session.processors.per.node` for EGGROLL, and `executor-cores` & `num-executors` for SPARK
2. set `eggroll_run` in job conf
 - `task_run_cores(guest, host, arbiter)eggroll.session.processors.per.node * total_nodes`
3. set `spark_run` in job conf
 - `task_run_cores(guest, host, arbiter)executor-cores * num-executors`

4.5.3 Resource Manager

1. Apply Resource for Jobs
 - Computing Engine set to EGGROLL, STANDALONE
 - `apply_cores(guest, host): task_run_cores * task_parallelism`
 - `apply_cores(arbiter): 0`, because actual resource cost is minimal and EGGROLL currently sets the same cores for all nodes, set to **0** to avoid unnecessary job queueing due to resource need from arbiter
 - note: on EGGROLL cluster, each node always assigns arbiter `task_run_cores/nodes` cores
 - Computing Engine set to SPARK
 - SPARK supports `executor-cores * num-executors`; not strongly correlated with number of cluster nodes due to SPARK own resource manager; if the calculated resource different from the one actually applied, jobs may keep waiting on SPARK engine
 - `apply_cores(guest, host, arbiter): task_run_cores * task_parallelism`
2. Job Management Policy
 - Enqueue by job submission time
 - Currently only support FIFO policy: manager only applies resources for the first job, deque the first job if success, wait for the next round if failure
3. Resource Application Policy
 - Manager selects job following the above guidelines and distribute federated resource application request to all participants
 - If all participants successfully secure resource, i.e.: $(total_cores - apply_cores > 0)$, then the job succeeds in resource application
 - If not all participants succeeds, then send rollback request to succeeded participants, and the job fails in resource application

7.2.5 5. Component Parameter Configuration

5.1 Configuration Applicable Range Policy

- `common`: applies to all participants
- `role`: applies only to specific participant; specify participant in `$role:$party_index` format; note that `role` configuration takes priority over `common`

```
"common": {
}

"role": {
  "guest": {
    "0": {
    }
  }
}
```

In the example above, configuration inside ``common`` applies to all participants; configuration inside `role-guest-0` only applies to participant `guest_0`

Note: current version now supports checking on both fields of specification.

5.2 Example Component Parameter Configuration

- Configuration of modules `intersection_0` & `hetero_lr_0` are put inside `common`, thus applies to all participants
- Configuration of modules `reader_0` & `dataio_0` are specified for each participant
- Names of the above modules are specified in `dsl` file

```
"component_parameters": {
  "common": {
    "intersection_0": {
      "intersect_method": "raw",
      "sync_intersect_ids": true,
      "only_output_key": false
    },
    "hetero_lr_0": {
      "penalty": "L2",
      "optimizer": "rmsprop",
      "alpha": 0.01,
      "max_iter": 3,
      "batch_size": 320,
      "learning_rate": 0.15,
      "init_param": {
        "init_method": "random_uniform"
      }
    }
  },
  "role": {
    "guest": {
      "0": {
        "reader_0": {
          "table": {"name": "breast_hetero_guest", "namespace": "experiment"}
        }
      }
    }
  }
}
```

(continues on next page)

(continued from previous page)

```

    },
    "dataio_0": {
      "with_label": true,
      "label_name": "y",
      "label_type": "int",
      "output_format": "dense"
    }
  },
  "host": {
    "0": {
      "reader_0": {
        "table": { "name": "breast_hetero_host", "namespace": "experiment" }
      },
      "dataio_0": {
        "with_label": false,
        "output_format": "dense"
      }
    }
  }
}

```

5.3 Multi-host configuration

For multi-host modeling case, all the host's party ids should be list in the role field.

```

"role": {
  "guest": [
    10000
  ],
  "host": [
    10000, 10001, 10002
  ],
  "arbiter": [
    10000
  ]
}

```

Each parameter set for host should also be config The number of elements should match the number of hosts.

```

"component_parameters": {
  "role": {
    "host": {
      "0": {
        "reader_0": {
          "table": {
            "name": "hetero_breast_host_0",
            "namespace": "hetero_breast_host"
          }
        }
      },
      "1": {
        "reader_0": {

```

(continues on next page)

(continued from previous page)

```

        "table": {
            {
                "name": "hetero_breast_host_1",
                "namespace": "hetero_breast_host"
            }
        },
        "2": {
            "reader_0": {
                "table": {
                    {
                        "name": "hetero_breast_host_2",
                        "namespace": "hetero_breast_host"
                    }
                }
            }
        }
    }
}

```

The parameters set in common parameters need not be copied into host role parameters. Common parameters will be copied for every party.

5.4 Prediction configuration

5.4.1 Overview

Please note that in dsl v2predict dsl is not automatically generated after training. User should first deploy needed components with [Flow Client](#). Please refer to [FATE-Flow document](#) for details on using deploy command:

```
flow model deploy --model-id $model_id --model-version $model_version --cpn-list ...
```

Optionally, user can add additional component(s) to predict dsl, like Evaluation:

5.4.2 Example

training dsl:

```

"components": {
    "reader_0": {
        "module": "Reader",
        "output": {
            "data": [
                "data"
            ]
        }
    },
    "dataio_0": {
        "module": "DataIO",
        "input": {
            "data": {
                "data": [
                    "reader_0.data"
                ]
            }
        }
    }
}

```

(continues on next page)

(continued from previous page)

```

        ]
      },
      "output": {
        "data": [
          "data"
        ],
        "model": [
          "model"
        ]
      }
    },
    "intersection_0": {
      "module": "Intersection",
      "input": {
        "data": {
          "data": [
            "dataio_0.data"
          ]
        }
      },
      "output": {
        "data": [
          "data"
        ]
      }
    },
    "hetero_nn_0": {
      "module": "HeteroNN",
      "input": {
        "data": {
          "train_data": [
            "intersection_0.data"
          ]
        }
      },
      "output": {
        "data": [
          "data"
        ],
        "model": [
          "model"
        ]
      }
    }
  }
}

```

predict dsl:

```

"components": {
  "reader_0": {
    "module": "Reader",
    "output": {
      "data": [
        "data"
      ]
    }
  }
}

```

(continues on next page)

(continued from previous page)

```

    },
    "dataio_0": {
      "module": "DataIO",
      "input": {
        "data": {
          "data": [
            "reader_0.data"
          ]
        }
      },
      "output": {
        "data": [
          "data"
        ],
        "model": [
          "model"
        ]
      }
    },
    "intersection_0": {
      "module": "Intersection",
      "input": {
        "data": {
          "data": [
            "dataio_0.data"
          ]
        }
      },
      "output": {
        "data": [
          "data"
        ]
      }
    },
    "hetero_nn_0": {
      "module": "HeteroNN",
      "input": {
        "data": {
          "train_data": [
            "intersection_0.data"
          ]
        }
      },
      "output": {
        "data": [
          "data"
        ],
        "model": [
          "model"
        ]
      }
    },
    "evaluation_0": {
      "module": "Evaluation",
      "input": {
        "data": {
          "data": [

```

(continues on next page)

(continued from previous page)

```

        "hetero_nn_0.data"
    ]
}
},
"output": {
    "data": [
        "data"
    ]
}
}

```

7.2.6 6. Basic Workflow


1. After job submission, FATE-Flow obtains job dsl and job config and store them inside job folder under corresponding directory `$PROJECT_BASE/jobs/$jobid/`
2. Parse job dsl & job config, generate fine-grained configuration according to provided settings (as mentioned above, backend & work_mode together determines configuration for three engines) and fill in default parameter values
3. Distribute and store common configuration to each party, generate and store party-specific **job_runtime_on_party_confunder** jobs directory
4. Each party execute job following **job_runtime_on_party_conf**

FEDERATED MACHINE LEARNING

[]

FederatedML includes implementation of many common machine learning algorithms on federated learning. All modules are developed in a decoupling modular approach to enhance scalability. Specifically, we provide:

1. Federated Statistic: PSI, Union, Pearson Correlation, etc.
2. Federated Feature Engineering: Feature Sampling, Feature Binning, Feature Selection, etc.
3. Federated Machine Learning Algorithms: LR, GBDT, DNN, TransferLearning, which support Heterogeneous and Homogeneous styles.
4. Model Evaluation: Binary | Multiclass | Regression | Clustering Evaluation, Local vs Federated Comparison.
5. Secure Protocol: Provides multiple security protocols for secure multi-party computing and interaction between participants.

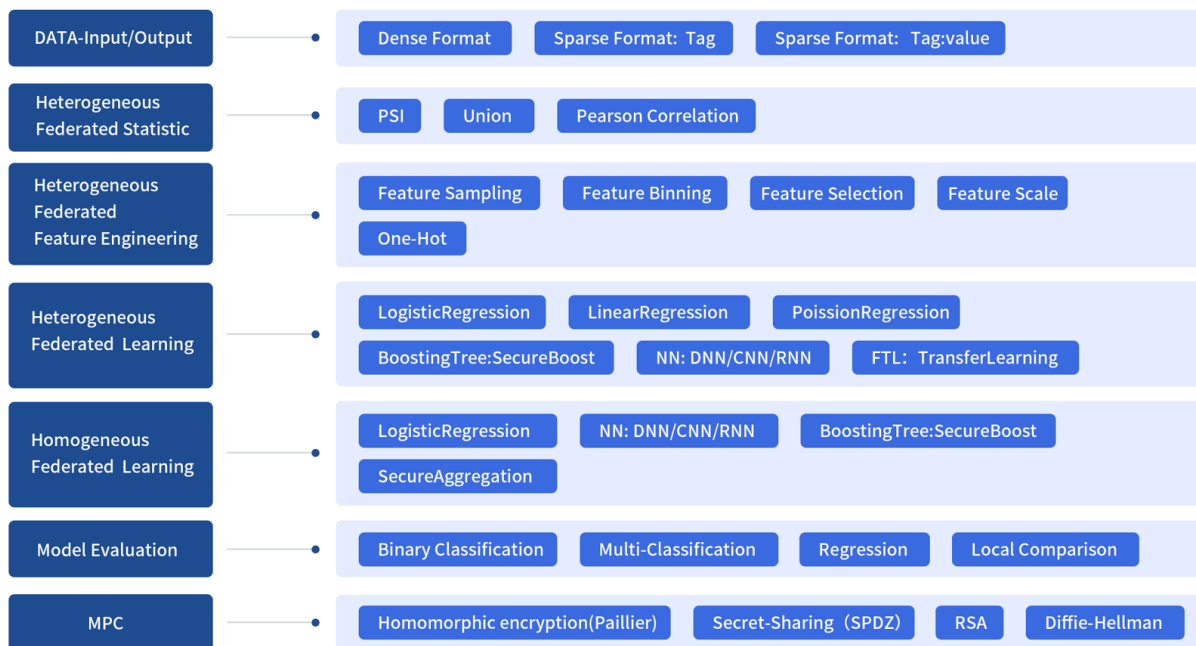

8.1 Algorithm List

Table 1: Algorithm

Algo-rithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Reader	Reader	This component loads and transforms data from storage engine so that data is compatible with FATE computing engine	Original Data	Trans-formed Data		
DataIO	DataIO	This component transforms user-uploaded data into Instance object(deprecate in FATE-v1.7, use DataTransform instead).	Table, values are raw data.	Trans-formed Table, values are data instance defined here		DataIO Model
Data-Trans-form	Data-Trans-form	This component transforms user-uploaded data into Instance object.	Table, values are raw data.	Trans-formed Table, values are data instance defined here		Data-Trans-form Model
Intersect	Inter-section	Compute intersect data set of multiple parties without leakage of difference set information. Mainly used in hetero scenario task.	Table.	Table with only common instance keys.		Intersect Model
Fed-erated Sam-pling	Federat-edSam-ple	Federated Sampling data so that its distribution become balance in each party.This module supports standalone and federated versions.	Table	Table of sampled data; both random and strat-ified sam-pling methods are sup-ported.		
Feature Scale	Fea-tureScale	module for feature scaling and standardiza-tion.	Table-values are in-stances.	Trans-formed Table.	Trans-form fac-tors like min/max, mean/std.	

continues on next page

Table 1 – continued from previous page

Algorithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Hetero Feature Binning	Hetero Feature Binning	With binning input data, calculates each column's iv and woe and transform data according to the binned information.	Table, values are instances.	Transformed Table.		iv/woe, split points, event count, non-event count etc. of each column.
Homo Feature Binning	Homo Feature Binning	Calculate quantile binning through multiple parties	Table	Transformed Table		Split points of each column
OneHot Encoder	One-HotEncoder	Transfer a column into one-hot format.	Table, values are instances.	Transformed Table with new header.		Feature-name mapping between original header and new header.
Hetero Feature Selection	Hetero-Feature-Selection	Provide 5 types of filters. Each filters can select columns according to user config	Table	Transformed Table with new header and filtered data instance.	If iv filters used, hetero_binning model is needed.	Whether each column is filtered.
Union	Union	Combine multiple data tables into one.	Tables.	Table with combined values from input Tables.		

continues on next page

Table 1 – continued from previous page

Algorithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Hetero-LR	HeteroLR	Build hetero logistic regression model through multiple parties.	Table, values are instances	Table, values are instances.		Logistic Regression Model, consists of model-meta and model-param.
Local Baseline	Local-Baseline	Wrapper that runs sklearn(scikit-learn) Logistic Regression model with local data.	Table, values are instances.	Table, values are instances.		
Hetero-LinR	HeteroLinR	Build hetero linear regression model through multiple parties.	Table, values are instances.	Table, values are instances.		Linear Regression Model, consists of model-meta and model-param.
Hetero-Poisson	HeteroPoisson	Build hetero poisson regression model through multiple parties.	Table, values are instances.	Table, values are instances.		Poisson Regression Model, consists of model-meta and model-param.
Homo-LR	HomoLR	Build homo logistic regression model through multiple parties.	Table, values are instances.	Table, values are instances.		Logistic Regression Model, consists of model-meta and model-param.

continues on next page

Table 1 – continued from previous page

Algorithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Homo-NN	HomoNN	Build homo neural network model through multiple parties.	Table, values are instances.	Table, values are instances.		Neural Network Model, consists of model-meta and model-param.
Hetero Secure Boosting	HeteroSecureBoost	Build hetero secure boosting model through multiple parties	Table, values are instances.	Table, values are instances.		Secure-Boost Model, consists of model-meta and model-param.
Hetero Fast Secure Boosting	HeteroFastSecureBoost	Build hetero secure boosting model through multiple parties in layered/mix manners.	Table, values are instances.	Table, values are instances.		FastSecure-Boost Model, consists of model-meta and model-param.
Hetero Secure Boost Feature Transformer	SBT Feature Transformer	This component can encode sample using Hetero SBT leaf indices.	Table, values are instances.	Table, values are instances.		SBT Transformer Model
Evaluation	Evaluation	Output the model evaluation metrics for user.	Table(s), values are instances.			
Hetero Pearson	Hetero-Pearson	Calculate hetero correlation of features from different parties.	Table, values are instances.			

continues on next page

Table 1 – continued from previous page

Algorithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Hetero-NN	HeteroNN	Build hetero neural network model.	Table, values are instances.	Table, values are instances.		Hetero Neural Network Model, consists of model-meta and model-param.
Homo Secure Boosting	HomoSecureBoost	Build homo secure boosting model through multiple parties	Table, values are instances.	Table, values are instances.		Secure-Boost Model, consists of model-meta and model-param.
Homo OneHot Encoder	HomoOneHotEncoder	Build homo onehot encoder model through multiple parties.	Table, values are instances.	Transformed Table with new header.		Feature-name mapping between original header and new header.
Data Split	Data Split	Split one data table into 3 tables by given ratio or count	Table, values are instances.	3 Tables, values are instance.		
Column Expand	Column Expand	Add arbitrary number of columns with user-provided values.	Table, values are raw data.	Transformed Table with added column(s) and new header.		Column Expand Model
Secure Information Retrieval	Secure Information Retrieval	Securely retrieves information from host through oblivious transfer	Table, values are instance	Table, values are instance		

continues on next page

Table 1 – continued from previous page

Algorithm	Module Name	Description	Data Input	Data Output	Model Input	Model Output
Hetero Federated Transfer Learning	Hetero FTL	Build Hetero FTL Model Between 2 party	Table, values are instance			Hetero FTL Model
Hetero KMeans	Hetero KMeans	Build Hetero KMeans model through multiple parties	Table, values are instance	Table, values are instance; Arbier outputs 2 Tables		Hetero KMeans Model
PSI	PSI module	Compute PSI value of features between two table	Table, values are instance			PSI Results
Data Statistics	Data Statistics	This component will do some statistical work on the data, including statistical mean, maximum and minimum, median, etc.	Table, values are instance	Table		Statistic Result
Score-card	Score-card	Scale predict score to credit score by given scaling parameters	Table, values are predict score	Table, values are score results		
Sample Weight	Sample Weight	Assign weight to instances according to user-specified parameters	Table, values are instance	Table, values are weighted instance		
Feldman Verifiable Sum	Feldman Verifiable Sum	This component will sum multiple privacy values without exposing data	Table, values are addend	Table, values are sum results		

8.2 Secure Protocol

- Encrypt
 - Paillier encryption
 - Affine Homomorphic Encryption
 - IterativeAffine Homomorphic Encryption
 - RSA encryption
 - Fake encryption
- Encode

- Diffie Hellman Key Exchange
- SecretShare MPC Protocol (SPDZ)
- Oblivious Transfer
- Feldman Verifiable Secret Sharing

8.3 Params

Classes:

BoostingParam([task_type, objective_param, ...])	Basic parameter for Boosting Algorithms
ColumnExpandParam([append_header, method, ...])	Define method used for expanding column
CrossValidationParam([n_splits, mode, role, ...])	Define cross validation params
DataIOParam([input_format, delimiter, ...])	Define dataio parameters that used in federated ml.
DataSplitParam([random_state, test_size, ...])	Define data split param that used in data split.
DataTransformParam([input_format, ...])	Define data transform parameters that used in federated ml.
DecisionTreeParam([criterion_method, ...])	Define decision tree parameters that used in federated ml.
EncodeParam([salt, encode_method, base64])	Define the hash method for raw intersect method
EncryptParam([method, key_length])	Define encryption method that used in federated ml.
EncryptedModeCalculatorParam([mode, ...])	Define the encrypted_mode_calculator parameters.
FeatureBinningParam([method, ...])	Define the feature binning method
FeatureSelectionParam([select_col_indexes, ...])	Define the feature selection parameters.
HeteroNNParam([task_type, config_type, ...])	Parameters used for Hetero Neural Network.
HomoNNParam([api_version, secure_aggregate, ...])	Parameters used for Homo Neural Network.
HomoOneHotParam([transform_col_indexes, ...])	
param transform_col_indexes Specify which columns need to calculated. -1 represent for all columns.	
InitParam([init_method, init_const, ...])	Initialize Parameters used in initializing a model.
IntersectParam([intersect_method, ...])	Define the intersect method
KmeansParam([k, max_iter, tol, random_stat])	Parameters used for K-means.
LinearParam([penalty, tol, alpha, ...])	Parameters used for Linear Regression.
LocalBaselineParam([model_name, model_opts, ...])	Define the local baseline model param
LogisticParam([penalty, tol, alpha, ...])	Parameters used for Logistic Regression both for Homo mode or Hetero mode.
ObjectiveParam([objective, params])	Define objective parameters that used in federated ml.
OneVsRestParam([need_one_vs_rest, has_arbiter])	Define the one_vs_rest parameters.
PoissonParam([penalty, tol, alpha, ...])	Parameters used for Poisson Regression.
PredictParam([threshold])	Define the predict method of HomoLR, HeteroLR, SecureBoosting
RSAParam([salt, hash_method, ...])	Define the hash method for RSA intersect method
RsaParam([rsa_key_n, rsa_key_e, rsa_key_d, ...])	Define the sample method
SampleParam([mode, method, fractions, ...])	Define the sample method

continues on next page

Table 2 – continued from previous page

<code>SampleWeightParam([class_weight, ...])</code>	Define sample weight parameters
<code>ScaleParam([method, mode, ...])</code>	Define the feature scale parameters.
<code>ScorecardParam([method, offset, factor, ...])</code>	Define method used for transforming prediction score to credit score
<code>SecureInformationRetrievalParam([...])</code>	security_level: float [0, 1]; if security_level == 0, then do raw data retrieval oblivious_transfer_protocol: OT type, only supports consts.OT_HAUCK commutative_encryption: the commutative encryption scheme used, only supports consts.CE_PH non_committing_encryption: the non-committing encryption scheme used, only supports consts.AES key_size: int >= 768, the key length of the commutative cipher raw_retrieval: bool, perform raw retrieval if raw_retrieval
<code>StatisticsParam([statistics, column_names, ...])</code>	Define statistics params
<code>StepwiseParam([score_name, mode, role, ...])</code>	Define stepwise params
<code>StochasticQuasiNewtonParam([...])</code>	Parameters used for stochastic quasi-newton method.
<code>UnionParam([need_run, allow_missing, ...])</code>	Define the union method for combining multiple dTables and keep entries with the same id

```
class BoostingParam (task_type='classification', objective_param=<federatedml.param.boosting_param.ObjectiveParam
object>, learning_rate=0.3, num_trees=5, subsample_feature_rate=1,
n_iter_no_change=True, tol=0.0001, bin_num=32, pre-
dict_param=<federatedml.param.predict_param.PredictParam
object>,
cv_param=<federatedml.param.cross_validation_param.CrossValidationParam
object>, validation_freqs=None, metrics=None, random_seed=100, bin-
ning_error=0.0001)
```

Basic parameter for Boosting Algorithms

Parameters

- **task_type** (*str*, accepted 'classification', 'regression' only, default: 'classification')–
- **objective_param** (*ObjectiveParam Object*, default: *ObjectiveParam()*)–
- **learning_rate** (*float*, accepted float, int or long only, the learning rate of secure boost. default: 0.3)–
- **num_trees** (*int*, accepted int, float only, the max number of boosting round. default: 5)–
- **subsample_feature_rate** (*float*, a float-number in [0, 1], default: 1.0)–
- **n_iter_no_change** (*bool*,)– when True and residual error less than tol, tree building process will stop. default: True
- **bin_num** (*int*, positive integer greater than 1, bin number use in quantile. default: 32)–
- **validation_freqs** (*None or positive integer or container object in python. Do validation in training process or Not.*)– if equals None, will not do validation in train process; if equals positive integer, will validate data every validation_freqs epochs passes; if container object in python, will validate data if epochs belong to this container.

e.g. `validation_freqs = [10, 15]`, will validate data when epoch equals to 10 and 15.

Default: None

```
class ColumnExpandParam(append_header=None,      method='manual',      fill_value=1e-08,
                        need_run=True)
```

Define method used for expanding column

Parameters

- **append_header** (*None, str, List[str] default: None*) – Name(s) for appended feature(s). If None is given, module outputs the original input value without any operation.
- **method** (*str, default: 'manual'*) – If method is ‘manual’, use user-specified *fill_value* to fill in new features.
- **fill_value** (*(int, float, str, List[int], List[float], List[str] default: 1e-8)*) – Used for filling expanded feature columns. If given a list, length of the list must match that of *append_header*
- **need_run** (*bool, default: True*) – Indicate if this module needed to be run.

```
class CrossValidationParam(n_splits=5, mode='hetero', role='guest', shuffle=True, random_seed=1,
                           need_cv=False, output_fold_history=True, history_value_type='score')
```

Define cross validation params

Parameters

- **n_splits** (*int, default: 5*) – Specify how many splits used in KFold
- **mode** (*str, default: 'Hetero'*) – Indicate what mode is current task
- **role** (*str, default: 'Guest'*) – Indicate what role is current party
- **shuffle** (*bool, default: True*) – Define whether do shuffle before KFold or not.
- **random_seed** (*int, default: 1*) – Specify the random seed for numpy shuffle
- **need_cv** (*bool, default False*) – Indicate if this module needed to be run
- **output_fold_history** (*bool, default True*) – Indicate whether to output table of ids used by each fold, else return original input data returned ids are formatted as: {original_id}#fold{fold_num}#{train/validate}
- **history_value_type** (*(str, default score, choose between {'instance', 'score'})*) – Indicate whether to include original instance or predict score in the output fold history, only effective when *output_fold_history* set to True

```
class DataIOParam(input_format='dense', delimiter=',', data_type='float64', exclusive_data_type=None,
                  tag_with_value=False, tag_value_delimiter=':', missing_fill=False, default_value=0,
                  missing_fill_method=None, missing_impute=None, outlier_replace=False, outlier_replace_method=None,
                  outlier_impute=None, outlier_replace_value=0, with_label=False, label_name='y', label_type='int',
                  output_format='dense', need_run=True)
```

Define dataio parameters that used in federated ml.

Parameters

- **input_format** (*(str, accepted 'dense', 'sparse' 'tag' only in this version. default: 'dense'.)*) – please have a look at this tutorial at “DataIO” section of `federatedml/util/README.md`. Formally,

dense input format data should be set to “dense”, svm-light input format data should be set to “sparse”, tag or **tag:value** input format data should be set to “tag”.

- **delimiter** (*str*, the delimiter of data input, default: ',') -
- **data_type** (*str*, the data type of data input, accepted 'float', 'float64', 'int', 'int64', 'str', 'long') - “default: “float64”
- **exclusive_data_type** (*dict*, the key of dict is col_name, the value is data_type, use to specified special data type) - of some features.
- **tag_with_value** (*bool*, use if input_format is 'tag', if tag_with_value is True,) - input column data format should be tag[delimiter]value, otherwise is tag only
- **tag_value_delimiter** (*str*, use if input_format is 'tag' and 'tag_with_value' is True,) - delimiter of tag[delimiter]value column value.
- **missing_fill** (*bool*, need to fill missing value or not, accepted only True/False, default: False) -
- **default_value** (*None* or single object type or list, the value to replace missing value.) - if None, it will use default value define in federatedml/feature/imputer.py, if single object, will fill missing value with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have missing values, it will replace it the value by element in the identical position of this list.

default: None

- **missing_fill_method** (*None* or *str*, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None) -
- **missing_impute** (*None* or list, element of list can be any type, or auto generated if value is None, define which values to be consider as missing, default: None) -
- **outlier_replace** (*bool*, need to replace outlier value or not, accepted only True/False, default: True) -
- **outlier_replace_method** (*None* or *str*, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None) -
- **outlier_impute** (*None* or list, element of list can be any type, which values should be regard as missing value, default: None) -
- **outlier_replace_value** (*None* or single object type or list, the value to replace outlier.) - if None, it will use default value define in federatedml/feature/imputer.py, if single object, will replace outlier with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have outliers, it will replace it the value by element in the identical position of this list.

default: None

- **with_label** (*bool*, True if input data consist of label, False otherwise. default: 'false') -

- **label_name** (*str, column_name of the column where label locates, only use in dense-inputformat. default: 'y'*)–
- **label_type** (*object, accepted 'int', 'int64', 'float', 'float64', 'long', 'str' only,*)– use when with_label is True. default: 'false'
- **output_format** (*str, accepted 'dense', 'sparse' only in this version. default: 'dense'*)–

class DataSplitParam(*random_state=None, test_size=None, train_size=None, validate_size=None, stratified=False, shuffle=True, split_points=None, need_run=True*)

Define data split param that used in data split.

Parameters

- **random_state** (*None, int, default: None*) – Specify the random state for shuffle.
- **test_size** (*None, float, int, default: 0.0*) – Specify test data set size. float value specifies fraction of input data set, int value specifies exact number of data instances
- **train_size** (*None, float, int, default: 0.8*) – Specify train data set size. float value specifies fraction of input data set, int value specifies exact number of data instances
- **validate_size** (*None, float, int, default: 0.2*) – Specify validate data set size. float value specifies fraction of input data set, int value specifies exact number of data instances
- **stratified** (*boolean, default: False*) – Define whether sampling should be stratified, according to label value.
- **shuffle** (*boolean, default : True*) – Define whether do shuffle before splitting or not.
- **split_points** (*None, list, default : None*) – Specify the point(s) by which continuous label values are bucketed into bins for stratified split. eg.[0.2] for two bins or [0.1, 1, 3] for 4 bins
- **need_run** (*bool, default: True*) – Specify whether to run data split

class DataTransformParam(*input_format='dense', delimiter=',', data_type='float64', exclusive_data_type=None, tag_with_value=False, tag_value_delimiter=':', missing_fill=False, default_value=0, missing_fill_method=None, missing_impute=None, outlier_replace=False, outlier_replace_method=None, outlier_impute=None, outlier_replace_value=0, with_label=False, label_name='y', label_type='int', output_format='dense', need_run=True*)

Define data transform parameters that used in federated ml.

Parameters

- **input_format** (*str, accepted 'dense', 'sparse' 'tag' only in this version. default: 'dense'.*) – please have a look at this tutorial at “DataTransform” section of federatedml/util/README.md. Formally,
dense input format data should be set to “dense”, svm-light input format data should be set to “sparse”, tag or **tag:value** input format data should be set to “tag”.
- **delimiter** (*str, the delimiter of data input, default: ','*) –

- **data_type** (str, the data type of data input, accepted 'float', 'float64', 'int', 'int64', 'str', 'long') – “default: “float64”
- **exclusive_data_type** (dict, the key of dict is col_name, the value is data_type, use to specified special data type) – of some features.
- **tag_with_value** (bool, use if input_format is 'tag', if tag_with_value is True,) – input column data format should be tag[delimiter]value, otherwise is tag only
- **tag_value_delimiter** (str, use if input_format is 'tag' and 'tag_with_value' is True,) – delimiter of tag[delimiter]value column value.
- **missing_fill** (bool, need to fill missing value or not, accepted only True/False, default: False)–
- **default_value** (None or single object type or list, the value to replace missing value.) – if None, it will use default value define in federatedml/feature/imputer.py, if single object, will fill missing value with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have missing values, it will replace it the value by element in the identical position of this list.

default: None

- **missing_fill_method** (None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None)–
- **missing_impute** (None or list, element of list can be any type, or auto generated if value is None, define which values to be consider as missing, default: None)–
- **outlier_replace** (bool, need to replace outlier value or not, accepted only True/False, default: True)–
- **outlier_replace_method** (None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None)–
- **outlier_impute** (None or list, element of list can be any type, which values should be regard as missing value, default: None)–
- **outlier_replace_value** (None or single object type or list, the value to replace outlier.) – if None, it will use default value define in federatedml/feature/imputer.py, if single object, will replace outlier with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have outliers, it will replace it the value by element in the identical position of this list.

default: None

- **with_label** (bool, True if input data consist of label, False otherwise. default: 'false')–
- **label_name** (str, column_name of the column where label locates, only use in dense-inputformat. default: 'y')–

- **label_type** (*object, accepted 'int', 'int64', 'float', 'float64', 'long', 'str' only,*) – use when with_label is True. default: 'false'
- **output_format** (*str, accepted 'dense', 'sparse' only in this version. default: 'dense'*) –

```
class DecisionTreeParam(criterion_method='xgboost', criterion_params=[0.1, 0], max_depth=3,
                        min_sample_split=2, min_impurity_split=0.001, min_leaf_node=1,
                        max_split_nodes=65536, feature_importance_type='split',
                        n_iter_no_change=True, tol=0.001, min_child_weight=0,
                        use_missing=False, zero_as_missing=False, deterministic=False)
```

Define decision tree parameters that used in federated ml.

Parameters

- **criterion_method** (*str, accepted "xgboost" only, the criterion function to use, default: 'xgboost'*) –
- **criterion_params** (*list or dict, should be non empty and elements are float-numbers,*) – if a list is offered, the first one is l2 regularization value, and the second one is l1 regularization value. if a dict is offered, make sure it contains key 'l1', and 'l2'. l1, l2 regularization values are non-negative floats. default: [0.1, 0] or {'l1':0, 'l2':0.1}
- **max_depth** (*int, positive integer, the max depth of a decision tree, default: 3*) –
- **min_sample_split** (*int, least quantity of nodes to split, default: 2*) –
- **min_impurity_split** (*float, least gain of a single split need to reach, default: 1e-3*) –
- **min_child_weight** (*float, sum of hessian needed in child nodes. default is 0*) –
- **min_leaf_node** (*int, when samples no more than min_leaf_node, it becomes a leave, default: 1*) –
- **max_split_nodes** (*int, positive integer, we will use no more than max_split_nodes to*) – parallel finding their splits in a batch, for memory consideration. default is 65536
- **feature_importance_type** (*str, support 'split', 'gain' only.*) – if is 'split', feature_importances calculate by feature split times, if is 'gain', feature_importances calculate by feature split gain. default: 'split'
- **use_missing** (*bool, accepted True, False only, use missing value in training process or not. default: False*) –
- **zero_as_missing** (*bool, accepted True, False only, regard 0 as missing value or not,*) – will be use only if use_missing=True, default: False
- **deterministic** (*bool, ensure stability when computing histogram. Set this to true to ensure stable result when using*) – same data and same parameter. But it may slow down computation.

```
class EncodeParam(salt="", encode_method='none', base64=False)
```

Define the hash method for raw intersect method

Parameters

- **salt** (the src data string will be $str = str + salt$, default by empty string)–
- **encode_method** (str, the hash method of src data string, it support md5, sha1, sha224, sha256, sha384, sha512, sm3, default by None)–
- **base64** (bool, if True, the result of hash will be changed to base64, default by False)–

class EncryptParam (method='Paillier', key_length=1024)

Define encryption method that used in federated ml.

Parameters

- **method** (str, default: 'Paillier') – If method is 'Paillier', Paillier encryption will be used for federated ml. To use non-encryption version in HomoLR, set this to None. For detail of Paillier encryption, please check out the paper mentioned in README file. Accepted values: {'Paillier', 'IterativeAffine', 'Random_IterativeAffine'}
- **key_length** (int, default: 1024) – Used to specify the length of key in this encryption method.

class EncryptedModeCalculatorParam (mode='strict', re_encrypted_rate=1)

Define the encrypted_mode_calculator parameters.

Parameters

- **mode** (str, support 'strict', 'fast', 'balance', 'confusion_opt', 'only', default: strict)–
- **re_encrypted_rate** (float or int, numeric number in [0, 1], use when mode equals to 'balance', default: 1)–

class FeatureBinningParam (method='quantile', compress_thres=10000, head_size=10000, error=0.0001, bin_num=10, bin_indexes=-1, bin_names=None, adjustment_factor=0.5, transform_param=<federatedml.param.feature_binning_param.TransformParam object>, local_only=False, category_indexes=None, category_names=None, need_run=True, skip_static=False)

Define the feature binning method

Parameters

- **method** (str, 'quantile' 'bucket' or 'optimal', default: 'quantile') – Binning method.
- **compress_thres** (int, default: 10000) – When the number of saved summaries exceed this threshold, it will call its compress function
- **head_size** (int, default: 10000) – The buffer size to store inserted observations. When head list reach this buffer size, the QuantileSummaries object start to generate summary(or stats) and insert into its sampled list.
- **error** (float, $0 \leq error < 1$ default: 0.001) – The error of tolerance of binning. The final split point comes from original data, and the rank of this value is close to the exact rank. More precisely, $\text{floor}((p - 2 * error) * N) \leq \text{rank}(x) \leq \text{ceil}((p + 2 * error) * N)$ where p is the quantile in float, and N is total number of data.
- **bin_num** (int, bin_num > 0, default: 10) – The max bin number for binning

- **bin_indexes** (*list of int or int, default: -1*) – Specify which columns need to be binned. -1 represent for all columns. If you need to indicate specific cols, provide a list of header index instead of -1.
- **bin_names** (*list of string, default: []*) – Specify which columns need to be calculated. Each element in the list represent for a column name in header.
- **adjustment_factor** (*float, default: 0.5*) – the adjustment factor when calculating WOE. This is useful when there is no event or non-event in a bin. Please note that this parameter will NOT take effect for setting in host.
- **category_indexes** (*list of int or int, default: []*) – Specify which columns are category features. -1 represent for all columns. List of int indicate a set of such features. For category features, bin_obj will take its original values as split_points and treat them as have been binned. If this is not what you expect, please do NOT put it into this parameters.

The number of categories should not exceed bin_num set above.

- **category_names** (*list of string, default: []*) – Use column names to specify category features. Each element in the list represent for a column name in header.
- **local_only** (*bool, default: False*) – Whether just provide binning method to guest party. If true, host party will do nothing. Warnings: This parameter will be deprecated in future version.
- **transform_param** (*TransformParam*) – Define how to transfer the binned data.
- **need_run** (*bool, default True*) – Indicate if this module needed to be run
- **skip_static** (*bool, default False*) – If true, binning will not calculate iv, woe etc. In this case, optimal-binning will not be supported.

```
class FeatureSelectionParam (select_col_indexes=-1, select_names=None, filter_methods=None,
                             unique_param=<federatedml.param.feature_selection_param.UniqueValueParam
                             object>, iv_value_param=<federatedml.param.feature_selection_param.IVValueSelectionParam
                             object>, iv_percentile_param=<federatedml.param.feature_selection_param.IVPercentileSelectionParam
                             object>, iv_top_k_param=<federatedml.param.feature_selection_param.IVTopKParam
                             object>, variance_coe_param=<federatedml.param.feature_selection_param.VarianceOfCoefficientParam
                             object>, outlier_param=<federatedml.param.feature_selection_param.OutlierColsSelectionParam
                             object>, manually_param=<federatedml.param.feature_selection_param.ManuallyFilterParam
                             object>, percentage_value_param=<federatedml.param.feature_selection_param.PercentageValueParam
                             object>, iv_param=<federatedml.param.feature_selection_param.CommonFilterParam
                             object>, statistic_param=<federatedml.param.feature_selection_param.CommonFilterParam
                             object>, psi_param=<federatedml.param.feature_selection_param.CommonFilterParam
                             object>, vif_param=<federatedml.param.feature_selection_param.CommonFilterParam
                             object>, sbt_param=<federatedml.param.feature_selection_param.CommonFilterParam
                             object>, correlation_param=<federatedml.param.feature_selection_param.CorrelationFilterParam
                             object>, need_run=True)
```

Define the feature selection parameters.

Parameters

- **select_col_indexes** (*list or int, default: -1*) – Specify which columns need to be calculated. -1 represent for all columns.
- **select_names** (*list of string, default: []*) – Specify which columns need to be calculated. Each element in the list represent for a column name in header.
- **filter_methods** (*list, ["manually", "iv_filter", "statistic_filter",]*) –

`“psi_filter”, “hetero_sbt_filter”, “homo_sbt_filter”, “hetero_fast_sbt_filter”,
“percentage_value”, “vif_filter”, “correlation_filter”],`

`default: [“manually”]`

The following methods will be deprecated in future version: `“unique_value”, “iv_value_thres”, “iv_percentile”, “coefficient_of_variation_value_thres”, “outlier_cols”`

Specify the filter methods used in feature selection. The orders of filter used is depended on this list. Please be notified that, if a percentile method is used after some certain filter method, the percentile represent for the ratio of rest features.

e.g. If you have 10 features at the beginning. After first filter method, you have 8 rest. Then, you want top 80% highest iv feature. Here, we will choose $\text{floor}(0.8 * 8) = 6$ features instead of 8.

- **unique_param** *(filter the columns if all values in this feature is the same)–*
- **iv_value_param** *(Use information value to filter columns. If this method is set, a float threshold need to be provided.) –* Filter those columns whose iv is smaller than threshold. Will be deprecated in the future.
- **iv_percentile_param** *(Use information value to filter columns. If this method is set, a float ratio threshold) – need to be provided.* Pick $\text{floor}(\text{ratio} * \text{feature_num})$ features with higher iv. If multiple features around the threshold are same, all those columns will be keep. Will be deprecated in the future.
- **variance_coe_param** *(Use coefficient of variation to judge whether filtered or not.)–* Will be deprecated in the future.
- **outlier_param** *(Filter columns whose certain percentile value is larger than a threshold.)–* Will be deprecated in the future.
- **percentage_value_param** *(Filter the columns that have a value that exceeds a certain percentage.)–*
- **iv_param** *(Setting how to filter base on iv. It support take high mode only. All of “threshold”,) –* “top_k” and “top_percentile” are accepted. Check more details in CommonFilterParam. To use this filter, hetero-feature-binning module has to be provided.
- **statistic_param** *(Setting how to filter base on statistic values. All of “threshold”,) –* “top_k” and “top_percentile” are accepted. Check more details in CommonFilterParam. To use this filter, data_statistic module has to be provided.
- **psi_param** *(Setting how to filter base on psi values. All of “threshold”,) –* “top_k” and “top_percentile” are accepted. Its take_high properties should be False to choose lower psi features. Check more details in CommonFilterParam. To use this filter, data_statistic module has to be provided.
- **need_run** *(bool, default True)–* Indicate if this module needed to be run

```

class HeteroNNParam (task_type='classification',    config_type='keras',    bottom_nn_define=None,
                    top_nn_define=None,            interactive_layer_define=None,            in-
                    teractive_layer_lr=0.9,        optimizer='SGD',            loss=None,
                    epochs=100,    batch_size=-1,    early_stop='diff',    tol=1e-05,    en-
                    crypt_param=<federatedml.param.encrypt_param.EncryptParam object>, en-
                    crypt_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedM
                    object>, predict_param=<federatedml.param.predict_param.PredictParam ob-
                    ject>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam
                    object>,    validation_freqs=None,    early_stopping_rounds=None,
                    metrics=None,    use_first_metric_only=True,    selec-
                    tor_param=<federatedml.param.hetero_nn_param.SelectorParam    object>,
                    floating_point_precision=23, drop_out_keep_rate=1.0)

```

Parameters used for Hetero Neural Network.

Parameters

- **task_type** – str, task type of hetero nn model, one of ‘classification’, ‘regression’.
- **config_type** – str, accept “keras” only.
- **bottom_nn_define** – a dict represents the structure of bottom neural network.
- **interactive_layer_define** – a dict represents the structure of interactive layer.
- **interactive_layer_lr** – float, the learning rate of interactive layer.
- **top_nn_define** – a dict represents the structure of top neural network.
- **optimizer** – optimizer method, accept following types: 1. a string, one of “Adadelata”, “Adagrad”, “Adam”, “Adamax”, “Nadam”, “RMSprop”, “SGD” 2. a dict, with a required key-value pair keyed by “optimizer”,
 with optional key-value pairs such as learning rate.
 defaults to “SGD”
- **loss** – str, a string to define loss function used
- **early_stopping_rounds** – int, default: None
- **stop training if one metric doesn’t improve in last early_stopping_round rounds** (*Will*) –
- **metrics** – list, default: None Indicate when executing evaluation during train process, which metrics will be used. If not set, default metrics for specific task type will be used. As for binary classification, default metrics are [‘auc’, ‘ks’], for regression tasks, default metrics are [‘root_mean_squared_error’, ‘mean_absolute_error’], [ACCURACY, PRECISION, RECALL] for multi-classification task
- **use_first_metric_only** – bool, default: False Indicate whether to use the first metric in *metrics* as the only criterion for early stopping judgement.
- **epochs** – int, the maximum iteration for aggregation in training.
- **batch_size** – int, batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy. defaults to -1.
- **early_stop** – str, accept ‘diff’ only in this version, default: ‘diff’ Method used to judge converge or not.
 - a) diff Use difference of loss between two iterations to judge whether converge.
- **validation_freqs** – None or positive integer or container object in python. Do validation in training process or Not. if equals None, will not do validation in train

process; if equals positive integer, will validate data every validation_freqs epochs passes; if container object in python, will validate data if epochs belong to this container.

e.g. validation_freqs = [10, 15], will validate data when epoch equals to 10 and 15.

Default: None The default value is None, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “epochs” is recommended, otherwise, you will miss the validation scores of last training epoch.

- **floating_point_precision** – None or integer, if not None, means use floating_point_precision-bit to speed up calculation, e.g.: convert an x to round(x * 2**floating_point_precision) during Paillier operation, divide

the result by 2**floating_point_precision in the end.

- **drop_out_keep_rate** – float, should between 0 and 1, if not equals to 1.0, will enabled drop out

```
class HomoNNParam(api_version: int = 0, secure_aggregate: bool = True, aggregate_every_n_epoch: int = 1, config_type: str = 'nn', nn_define: Optional[dict] = None, optimizer: Union[str, dict, types.SimpleNamespace] = 'SGD', loss: Optional[str] = None, metrics: Optional[Union[str, list]] = None, max_iter: int = 100, batch_size: int = -1, early_stop: Union[str, dict, types.SimpleNamespace] = 'diff', encode_label: bool = False, predict_param=<federatedml.param.predict_param.PredictParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>)
```

Parameters used for Homo Neural Network.

Parameters Args – secure_aggregate: enable secure aggregation or not, defaults to True. aggregate_every_n_epoch: aggregate model every n epoch, defaults to 1. config_type: one of “nn”, “keras”, “tf” nn_define: a dict represents the structure of neural network. optimizer: optimizer method, accept following types:

1. a string, one of “Adadelata”, “Adagrad”, “Adam”, “Adamax”, “Nadam”, “RM-Sprop”, “SGD”
2. a dict, with a required key-value pair keyed by “optimizer”, with optional key-value pairs such as learning rate.

defaults to “SGD”

loss: a string metrics: max_iter: the maximum iteration for aggregation in training. batch_size: batch size when updating model.

-1 means use all data in a batch. i.e. Not to use mini-batch strategy. defaults to -1.

early_stop [str, ‘diff’, ‘weight_diff’ or ‘abs’, default: ‘diff’]

Method used to judge converge or not.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) weight_diff: Use difference between weights of two consecutive iterations
- c) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < eps, it is converged.

encode_label : encode label to one_hot.

```
class HomoOneHotParam(transform_col_indexes=- 1, transform_col_names=None, need_run=True, need_alignment=True)
```

Parameters

- **transform_col_indexes** (*list or int, default: -1*) – Specify which columns need to be calculated. -1 represents for all columns.
- **need_run** (*bool, default True*) – Indicate if this module needed to be run
- **need_alignment** (*bool, default True*) – Indicated whether alignment of features is turned on

```
class InitParam(init_method='random_uniform', init_const=1, fit_intercept=True, random_seed=None)
```

Initialize Parameters used in initializing a model.

Parameters

- **init_method** (*str, 'random_uniform', 'random_normal', 'ones', 'zeros' or 'const'. default: 'random_uniform'*) – Initial method.
- **init_const** (*int or float, default: 1*) – Required when `init_method` is 'const'. Specify the constant.
- **fit_intercept** (*bool, default: True*) – Whether to initialize the intercept or not.

```
class IntersectParam(intersect_method: str = 'raw', random_bit=128, sync_intersect_ids=True, join_role='guest', with_encode=False, only_output_key=False, encode_params=<federatedml.param.intersect_param.EncodeParam object>, rsa_params=<federatedml.param.intersect_param.RSAParam object>, intersect_cache_param=<federatedml.param.intersect_param.IntersectCache object>, repeated_id_process=False, repeated_id_owner='guest', with_sample_id=False, allow_info_share: bool = False, info_owner='guest')
```

Define the intersect method

Parameters

- **intersect_method** (*str, it supports 'rsa' and 'raw', default by 'raw'*) –
- **random_bit** (*positive int, it will define the encrypt length of rsa algorithm. It effective only for intersect_method is rsa*) –
- **sync_intersect_ids** (*bool. In rsa, 'synchronize_intersect_ids' is True means guest or host will send intersect results to the others, and False will not.*) – while in raw, 'synchronize_intersect_ids' is True means the role of "join_role" will send intersect results and the others will get them. Default by True.
- **join_role** (*str, role who joins ids, supports "guest" and "host" only and effective only for raw. If it is "guest", the host will send its ids to guest and find the intersection of) – ids in guest; if it is "host", the guest will send its ids to host. Default by "guest".*)
- **with_encode** (*bool, if True, it will use hash method for intersect ids. Effective only for "raw".*) –
- **encode_params** (*EncodeParam, it effective only for with_encode is True*) –
- **rsa_params** (*RSAParam, effective for rsa method only*) –

- **only_output_key** (*bool*, if false, the results of intersection will include key and value which from input data; if true, it will just include key from input) – data and the value will be empty or some useless character like “intersect_id”
- **repeated_id_process** (*bool*, if true, intersection will process the ids which can be repeatable)–
- **repeated_id_owner** (*str*, which role has the repeated ids)–
- **with_sample_id** (*bool*, data with sample id or not, default False; set this param to True may lead to unexpected behavior)–

class KmeansParam (*k=5, max_iter=300, tol=0.001, random_stat=None*)

k [int, should be larger than 1 and less than 100 in this version, default 5.] The number of the centroids to generate.

max_iter [int, default 300.] Maximum number of iterations of the hetero-k-means algorithm to run.

tol : float, default 0.001. **random_stat** : random seed

class LinearParam (*penalty='L2', tol=0.0001, alpha=1.0, optimizer='sgd', batch_size=-1, learning_rate=0.01, init_param=<federatedml.param.init_model_param.InitParam object>, max_iter=20, early_stop='diff', predict_param=<federatedml.param.predict_param.PredictParam object>, encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>, sqn_param=<federatedml.param.sqn_param.StochasticQuasiNewtonParam object>, encrypted_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedModeCalculationParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>, decay=1, decay_sqrt=True, validation_freqs=None, early_stopping_rounds=None, stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>, metrics=None, use_first_metric_only=False, float-ing_point_precision=23*)

Parameters used for Linear Regression.

Parameters

- **penalty** (*str*, 'L1' or 'L2'. default: 'L2') – Penalty method used in LinR. Please note that, when using encrypted version in HeteroLinR, 'L1' is not supported.
- **tol** (*float*, default: 1e-4) – The tolerance of convergence
- **alpha** (*float*, default: 1.0) – Regularization strength coefficient.
- **optimizer** (*str*, 'sgd', 'rmsprop', 'adam', 'sqn', or 'adagrad', default: 'sgd') – Optimize method
- **batch_size** (*int*, default: -1) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float*, default: 0.01) – Learning rate
- **max_iter** (*int*, default: 20) – The maximum iteration for training.
- **init_param** (*InitParam object*, default: default InitParam object) – Init param method object.
- **early_stop** (*str*, 'diff' or 'abs' or 'weight_dff', default: 'diff') –

Method used to judge convergence.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < tol, it is converged.
- c) weight_diff: Use difference between weights of two consecutive iterations

- **predict_param** (*PredictParam object, default: default PredictParam object*)-
 - **encrypt_param** (*EncryptParam object, default: default EncryptParam object*)-
 - **encrypted_mode_calculator_param** (*EncryptedModeCalculatorParam object, default: default EncryptedModeCalculatorParam object*)-
 - **cv_param** (*CrossValidationParam object, default: default CrossValidationParam object*)-
 - **decay** (*int or float, default: 1*) - Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr_0 / (1 + decay * t)$ if decay_sqrt is False. If decay_sqrt is True, $lr = lr_0 / \sqrt{1 + decay * t}$ where t is the iter number.
 - **decay_sqrt** (*Bool, default: True*) - $lr = lr_0 / (1 + decay * t)$ if decay_sqrt is False, otherwise, $lr = lr_0 / \sqrt{1 + decay * t}$
 - **validation_freqs** (*int, list, tuple, set, or None*) - validation frequency during training, required when using early stopping. The default value is None, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “max_iter” is recommended, otherwise, you will miss the validation scores of the last training iteration.
 - **early_stopping_rounds** (*int, default: None*) - If positive number specified, at every specified training rounds, program checks for early stopping criteria. Validation_freqs must also be set when using early stopping.
 - **metrics** (*list or None, default: None*) - Specify which metrics to be used when performing evaluation during training process. If metrics have not improved at early_stopping rounds, training stops before convergence. If set as empty, default metrics will be used. For regression tasks, default metrics are ['root_mean_squared_error', 'mean_absolute_error']
 - **use_first_metric_only** (*bool, default: False*) - Indicate whether to use the first metric in metrics as the only criterion for early stopping judgement.
 - **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*)-
- e.g.: convert an x to round($x * 2^{**floating_point_precision}$) during Paillier operation, divide the result by $2^{**floating_point_precision}$ in the end.

```
class LocalBaselineParam(model_name='LogisticRegression', model_opts=None, predict_param=<federatedml.param.predict_param.PredictParam object>, need_run=True)
```

Define the local baseline model param

Parameters

- **model_name** (*str, sklearn model used to train on baseline model*)-

- **model_opts** (*dict or none, default None*) – Param to be used as input into baseline model
- **predict_param** (*PredictParam object, default: default PredictParam object*) –
- **need_run** (*bool, default True*) – Indicate if this module needed to be run

```
class LogisticParam (penalty='L2', tol=0.0001, alpha=1.0, optimizer='rmsprop', batch_size=-1, learning_rate=0.01, init_param=<federatedml.param.init_model_param.InitParam object>, max_iter=100, early_stop='diff', encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>, predict_param=<federatedml.param.predict_param.PredictParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>, decay=1, decay_sqrt=True, multi_class='ovr', validation_freqs=None, early_stopping_rounds=None, stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>, floating_point_precision=23, metrics=None, use_first_metric_only=False)
```

Parameters used for Logistic Regression both for Homo mode or Hetero mode.

Parameters

- **penalty** (*str, 'L1', 'L2' or None. default: 'L2'*) – Penalty method used in LR. Please note that, when using encrypted version in HomoLR, 'L1' is not supported.
- **tol** (*float, default: 1e-4*) – The tolerance of convergence
- **alpha** (*float, default: 1.0*) – Regularization strength coefficient.
- **optimizer** (*str, 'sgd', 'rmsprop', 'adam', 'nesterov_momentum_sgd', 'sqn' or 'adagrad', default: 'rmsprop'*) – Optimize method, if 'sqn' has been set, sqn_param will take effect. Currently, 'sqn' support hetero mode only.
- **batch_size** (*int, default: -1*) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float, default: 0.01*) – Learning rate
- **max_iter** (*int, default: 100*) – The maximum iteration for training.
- **early_stop** (*str, 'diff', 'weight_diff' or 'abs', default: 'diff'*) –

Method used to judge converge or not.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) weight_diff: Use difference between weights of two consecutive iterations
- c) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < eps, it is converged.

Please note that for hetero-lr multi-host situation, this parameter support "weight_diff" only.

- **decay** (*int or float, default: 1*) – Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr_0 / (1 + decay * t)$ if decay_sqrt is False. If decay_sqrt is True, $lr = lr_0 / \sqrt{1 + decay * t}$ where t is the iter number.
- **decay_sqrt** (*Bool, default: True*) – $lr = lr_0 / (1 + decay * t)$ if decay_sqrt is False, otherwise, $lr = lr_0 / \sqrt{1 + decay * t}$

- **encrypt_param** (*EncryptParam object, default: default EncryptParam object*)–
- **predict_param** (*PredictParam object, default: default PredictParam object*)–
- **cv_param** (*CrossValidationParam object, default: default CrossValidationParam object*)–
- **multi_class** (*str, 'ovr', default: 'ovr'*) – If it is a multi_class task, indicate what strategy to use. Currently, support 'ovr' short for one_vs_rest only.
- **validation_freqs** (*int, list, tuple, set, or None*) – validation frequency during training.
- **early_stopping_rounds** (*int, default: None*) – Will stop training if one metric doesn't improve in last early_stopping_round rounds
- **metrics** (*list or None, default: None*) – Indicate when executing evaluation during train process, which metrics will be used. If set as empty, default metrics for specific task type will be used. As for binary classification, default metrics are ['auc', 'ks']
- **use_first_metric_only** (*bool, default: False*) – Indicate whether use the first metric only for early stopping judgement.
- **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*)–
e.g.: convert an x to $\text{round}(x * 2^{\text{floating_point_precision}})$ during Paillier operation, divide the result by $2^{\text{floating_point_precision}}$ in the end.

class ObjectiveParam (*objective='cross_entropy', params=None*)

Define objective parameters that used in federated ml.

Parameters

- **objective** (*None or str, accepted None, 'cross_entropy', 'lse', 'lae', 'log_cosh', 'tweedie', 'fair', 'huber' only,*) – None in host's config, should be str in guest config. when task_type is classification, only support cross_entropy, other 6 types support in regression task. default: None
- **params** (*None or list, should be non empty list when objective is 'tweedie', 'fair', 'huber',*) – first element of list should be a float-number large than 0.0 when objective is 'fair', 'huber', first element of list should be a float-number in [1.0, 2.0) when objective is 'tweedie'

class OneVsRestParam (*need_one_vs_rest=False, has_arbiter=True*)

Define the one_vs_rest parameters.

Parameters has_arbiter (*bool. For some algorithm, may not has arbiter, for instances, secureboost of FATE,*) – for these algorithms, it should be set to false. default true

```
class PoissonParam (penalty='L2', tol=0.0001, alpha=1.0, optimizer='rmsprop', batch_size=-1, learning_rate=0.01, init_param=<federatedml.param.init_model_param.InitParam object>, max_iter=20, early_stop='diff', exposure_colname=None, predict_param=<federatedml.param.predict_param.PredictParam object>, encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>, encrypted_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedModeCalculatorParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>, stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>, decay=1, decay_sqrt=True, validation_freqs=None, early_stopping_rounds=None, metrics=None, use_first_metric_only=False, floating_point_precision=23)
```

Parameters used for Poisson Regression.

Parameters

- **penalty** (*str*, 'L1' or 'L2'. default: 'L2') – Penalty method used in Poisson. Please note that, when using encrypted version in HeteroPoisson, 'L1' is not supported.
- **tol** (*float*, default: 1e-4) – The tolerance of convergence
- **alpha** (*float*, default: 1.0) – Regularization strength coefficient.
- **optimizer** (*str*, 'sgd', 'rmsprop', 'adam' or 'adagrad', default: 'rmsprop') – Optimize method
- **batch_size** (*int*, default: -1) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float*, default: 0.01) – Learning rate
- **max_iter** (*int*, default: 20) – The maximum iteration for training.
- **init_param** (*InitParam object*, default: default *InitParam object*) – Init param method object.
- **early_stop** (*str*, 'weight_diff', 'diff' or 'abs', default: 'diff') –

Method used to judge convergence.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) weight_diff: Use difference between weights of two consecutive iterations
- c) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < eps, it is converged.

- **exposure_colname** (*str or None*, default: None) – Name of optional exposure variable in dTable.
- **predict_param** (*PredictParam object*, default: default *PredictParam object*) –
- **encrypt_param** (*EncryptParam object*, default: default *EncryptParam object*) –
- **encrypted_mode_calculator_param** (*EncryptedModeCalculatorParam object*, default: default *EncryptedModeCalculatorParam object*) –
- **cv_param** (*CrossValidationParam object*, default: default *CrossValidationParam object*) –

- **stepwise_param** (*StepwiseParam object, default: default StepwiseParam object*)–
- **decay** (*int or float, default: 1*) – Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr0/(1+decay*t)$ if `decay_sqrt` is False. If `decay_sqrt` is True, $lr = lr0 / \sqrt{1+decay*t}$ where t is the iter number.
- **decay_sqrt** (*Bool, default: True*) – $lr = lr0/(1+decay*t)$ if `decay_sqrt` is False, otherwise, $lr = lr0 / \sqrt{1+decay*t}$
- **validation_freqs** (*int, list, tuple, set, or None*) – validation frequency during training, required when using early stopping. The default value is None, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “max_iter” is recommended, otherwise, you will miss the validation scores of the last training iteration.
- **early_stopping_rounds** (*int, default: None*) – If positive number specified, at every specified training rounds, program checks for early stopping criteria. `validation_freqs` must also be set when using early stopping.
- **metrics** (*list or None, default: None*) – Specify which metrics to be used when performing evaluation during training process. If metrics have not improved at `early_stopping_rounds`, training stops before convergence. If set as empty, default metrics will be used. For regression tasks, default metrics are ['root_mean_squared_error', 'mean_absolute_error']
- **use_first_metric_only** (*bool, default: False*) – Indicate whether to use the first metric in `metrics` as the only criterion for early stopping judgement.
- **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*)–
e.g.: convert an x to $\text{round}(x * 2^{**\text{floating_point_precision}})$ during Paillier operation, divide the result by $2^{**\text{floating_point_precision}}$ in the end.

class PredictParam (*threshold=0.5*)

Define the predict method of HomoLR, HeteroLR, SecureBoosting

Parameters threshold (*float or int, The threshold use to separate positive and negative class. Normally, it should be (0,1)*)–

class RSAParam (*salt="", hash_method='sha256', final_hash_method='sha256', split_calculation=False, random_base_fraction=None, key_length=1024*)

Define the hash method for RSA intersect method

Parameters

- **salt** (*the src data string will be $str = str + salt$, default ''*)–
- **hash_method** (*str, the hash method of src data string, it support sha256, sha384, sha512, sm3, default sha256*)–
- **final_hash_method** (*str, the hash method of result data string, it support md5, sha1, sha224, sha256, sha384, sha512, sm3, default sha256*)–
- **split_calculation** (*bool, if True, Host & Guest split operations for faster performance, recommended on large data set*)–

- **random_base_fraction** (positive float, if not None, generate (fraction * public key id count) of r for encryption and reuse generated r;) – note that value greater than 0.99 will be taken as 1, and value less than 0.01 will be rounded up to 0.01

- **key_length** (positive int, bit count of rsa key, default 1024)–

```
class RsaParam(rsa_key_n=None, rsa_key_e=None, rsa_key_d=None,
              save_out_table_namespace=None, save_out_table_name=None)
```

Define the sample method

Parameters

- **rsa_key_n** (integer, RSA modulus, default: None)–
- **rsa_key_e** (integer, RSA public exponent, default: None)–
- **rsa_key_d** (integer, RSA private exponent, default: None)–
- **save_out_table_namespace** (str, namespace of dtable where stores the output data. default: None)–
- **save_out_table_name** (str, name of dtable where stores the output data. default: None)–

```
class SampleParam(mode='random', method='downsample', fractions=None, random_state=None,
                  task_type='hetero', need_run=True)
```

Define the sample method

Parameters

- **mode** (str, accepted 'random', 'stratified' only in this version, specify sample to use, default: 'random')–
- **method** (str, accepted 'downsample', 'upsample' only in this version. default: 'downsample')–
- **fractions** (None or float or list, if mode equals to random, it should be a float number greater than 0,)– otherwise a list of elements of pairs like [label_i, sample_rate_i], e.g. [[0, 0.5], [1, 0.8], [2, 0.3]]. default: None
- **random_state** (int, RandomState instance or None, default: None)–
- **need_run** (bool, default True)– Indicate if this module needed to be run

```
class SampleWeightParam(class_weight=None, sample_weight_name=None, normalize=False,
                        need_run=True)
```

Define sample weight parameters

Parameters

- **class_weight** (str or dict, default None) – class weight dictionary or class weight computation mode, string value only accepts 'balanced'; If dict provided, key should be class(label), and weight will not be normalize, e.g.: {'0': 1, '1': 2} If both class_weight and sample_weight_name are None, return original input data.
- **sample_weight_name** (str, name of column which specifies sample weight.) – feature name of sample weight; if both class_weight and sample_weight_name are None, return original input data

- **normalize** (*bool*, default *False*) – whether to normalize sample weight extracted from *sample_weight_name* column
- **need_run** (*bool*, default *True*) – whether to run this module or not

```
class ScaleParam (method='standard_scale', mode='normal', scale_col_indexes=-1,
                  scale_names=None, feat_upper=None, feat_lower=None, with_mean=True,
                  with_std=True, need_run=True)
```

Define the feature scale parameters.

Parameters

- **method** (*str*, like *scale* in *sklearn*, now it support "min_max_scale" and "standard_scale", and will support other scale method soon.) – Default *standard_scale*, which will do nothing for scale
- **mode** (*str*, the mode support "normal" and "cap". for mode is "normal", the *feat_upper* and *feat_lower* is the normal value like "10" or "3.1" and for "cap", *feat_upper* and *feat_lower* will between 0 and 1, which means the percentile of the column. Default "normal")
- **feat_upper** (*int* or *float* or *list* of *int* or *float*, the upper limit in the column.) – If use list, mode must be "normal", and list length should equal to the number of features to scale. If the scaled value is larger than *feat_upper*, it will be set to *feat_upper*. Default *None*.
- **feat_lower** (*int* or *float* or *list* of *int* or *float*, the lower limit in the column.) – If use list, mode must be "normal", and list length should equal to the number of features to scale. If the scaled value is less than *feat_lower*, it will be set to *feat_lower*. Default *None*.
- **scale_col_indexes** (*list*, the *idx* of column in *scale_column_idx* will be scaled, while the *idx* of column is not in, it will not be scaled.) –
- **scale_names** (*list* of *string*, default: []) Specify which columns need to scaled. Each element in the list represent for a column name in header.) –
- **with_mean** (*bool*, used for "standard_scale". Default *True*.) –
- **with_std** (*bool*, used for "standard_scale". Default *True*.) – The standard scale of column *x* is calculated as : $z = (x - u) / s$, where *u* is the mean of the column and *s* is the standard deviation of the column. if *with_mean* is *False*, *u* will be 0, and if *with_std* is *False*, *s* will be 1.
- **need_run** (*bool*, default *True*) – Indicate if this module needed to be run

```
class ScorecardParam (method='credit', offset=500, factor=20, factor_base=2, upper_limit_ratio=3,
                      lower_limit_value=0, need_run=True)
```

Define method used for transforming prediction score to credit score

Parameters

- **method** (*str*, default: 'credit') – score method, currently only supports "credit"
- **offset** (*int* or *float*, default: 500) – score baseline
- **factor** (*int* or *float*, default: 20) – scoring step, when odds double, result score increases by this factor

- **factor_base** (*int or float, default: 2*) – factor base, value $\ln(\text{factor_base})$ is used for calculating result score
- **upper_limit_ratio** (*int or float, default: 3*) – upper bound for odds, credit score upper bound is $\text{upper_limit_ratio} * \text{offset}$
- **lower_limit_value** (*int or float, default: 0*) – lower bound for result score
- **need_run** (*bool, default: True*) – Indicate if this module needs to be run.

```
class SecureInformationRetrievalParam(security_level=0.5,                oblivious_transfer_protocol='OT_Hauck',                commutative_encryption='CommutativeEncryptionPohligHellman',                non_committing_encryption='aes',                key_size=1024,                raw_retrieval=False)
```

security_level: float [0, 1]; if *security_level* == 0, then do raw data retrieval
oblivious_transfer_protocol: OT type, only supports consts.OT_HAUCK
commutative_encryption: the commutative encryption scheme used, only supports consts.CE_PH
non_committing_encryption: the non-committing encryption scheme used, only supports consts.AES
key_size: int >= 768, the key length of the commutative cipher
raw_retrieval: bool, perform raw retrieval if *raw_retrieval*

```
class StatisticsParam(statistics='summary',                column_names=None,                column_indexes=-1,                need_run=True, abnormal_list=None, quantile_error=0.0001, bias=True)
```

Define statistics params

Parameters

- **statistics** (*list, string, default "summary"*) – Specify the statistic types to be computed. “summary” represents list: [consts.SUM, consts.MEAN, consts.STANDARD_DEVIATION, consts.MEDIAN, consts.MIN, consts.MAX, consts.MISSING_COUNT, consts.SKEWNESS, consts.KURTOSIS]
- **column_names** (*list of string, default []*) – Specify columns to be used for statistic computation by column names in header
- **column_indexes** (*list of int, default -1*) – Specify columns to be used for statistic computation by column order in header -1 indicates to compute statistics over all columns
- **bias** (*bool, default: True*) – If False, the calculations of skewness and kurtosis are corrected for statistical bias.
- **need_run** (*bool, default True*) – Indicate whether to run this modules

```
class StepwiseParam(score_name='AIC', mode='hetero', role='guest', direction='both', max_step=10, nvmin=2, nvmax=None, need_stepwise=False)
```

Define stepwise params

Parameters

- **score_name** (*str, default: 'AIC'*) – Specify which model selection criterion to be used, choose ‘aic’ or ‘bic’
- **mode** (*str, default: 'Hetero'*) – Indicate what mode is current task
- **role** (*str, default: 'Guest'*) – Indicate what role is current party
- **direction** (*str, default: 'both'*) – Indicate which direction to go for stepwise. ‘forward’ means forward selection; ‘backward’ means elimination; ‘both’ means possible models of both directions are examined at each step.

- **max_step**(*int*, *default*: '10') – Specify total number of steps to run before forced stop.
- **nvmin**(*int*, *default*: '2') – Specify the min subset size of final model, cannot be lower than 2. When `nvmin > 2`, the final model size may be smaller than `nvmin` due to `max_step` limit.
- **nvmax**(*int*, *default*: *None*) – Specify the max subset size of final model, `2 <= nvmin <= nvmax`. The final model size may be larger than `nvmax` due to `max_step` limit.
- **need_stepwise**(*bool*, *default* *False*) – Indicate if this module needed to be run

class StochasticQuasiNewtonParam(*update_interval_L=3*, *memory_M=5*, *sample_size=5000*,
random_seed=None)

Parameters used for stochastic quasi-newton method.

Parameters

- **update_interval_L**(*int*, *default*: 3) – Set how many iteration to update hess matrix
- **memory_M**(*int*, *default*: 5) – Stack size of curvature information, i.e. `y_k` and `s_k` in the paper.
- **sample_size**(*int*, *default*: 5000) – Sample size of data that used to update Hess matrix

class UnionParam(*need_run=True*, *allow_missing=False*, *keep_duplicate=False*)

Define the union method for combining multiple dTables and keep entries with the same id

Parameters

- **need_run**(*bool*, *default* *True*) – Indicate if this module needed to be run
- **allow_missing**(*bool*, *default* *False*) – Whether allow mismatch between feature length and header length in the result. Note that empty tables will always be skipped regardless of this param setting.
- **keep_duplicate**(*bool*, *default* *False*) – Whether to keep entries with duplicated keys. If set to *True*, a new id will be generated for duplicated entry in the format `{id}_{table_name}`.

EXAMPLE USAGE GUIDE.

We provide here examples of FATE jobs, including FATE-Pipeline scripts, DSL conf files, and modeling quality comparison tasks

We suggest that user use example-runner tool [FATE-Test](#).

Also, for smoother interaction with FATE-Flow, we suggest that user install Flow-Client with [FATE-Client](#).

To quickly start model training and predictions using dsl & pipeline, please refer to

1. [DSL v1 train and predict quick tutorial](#).
2. [DSL v2 train and predict quick tutorial](#).
3. [Pipeline train and predict quick tutorial](#).

Below lists included types of examples.

9.1 FATE-Pipeline

To enhance usability of FATE, starting at FATE-v1.5, FATE provides python APIs. User may develop federated learning models conveniently with [FATE-Pipeline](#). We provide a host of Pipeline examples for each FATE module and a quick start guide for Pipeline [here](#)

Below shows how to build and fit a Hetero SecureBoost model with FATE-Pipeline in few lines.

```
import json
from pipeline.backend.config import Backend, WorkMode
from pipeline.backend.pipeline import Pipeline
from pipeline.component import Reader, DataIO, Intersection, HeteroSecureBoost, \
    Evaluation
from pipeline.interface import Data
from pipeline.runtime.entity import JobParameters

guest_train_data = {"name": "breast_hetero_guest", "namespace": "experiment"}
host_train_data = {"name": "breast_hetero_host", "namespace": "experiment"}

# initialize pipeline
pipeline = Pipeline().set_initiator(role="guest", party_id=9999).set_roles(guest=9999,
    host=10000)

# define components
reader_0 = Reader(name="reader_0")
reader_0.get_party_instance(role="guest", party_id=9999).component_param(table=guest_
    train_data)
```

(continues on next page)

(continued from previous page)

```

reader_0.get_party_instance(role="host", party_id=10000).component_param(table=host_
↪train_data)
dataio_0 = DataIO(name="dataio_0", with_label=True)
dataio_0.get_party_instance(role="host", party_id=10000).component_param(with_
↪label=False)
intersect_0 = Intersection(name="intersection_0")
hetero_secureboost_0 = HeteroSecureBoost(name="hetero_secureboost_0",
                                         num_trees=5,
                                         bin_num=16,
                                         task_type="classification",
                                         objective_param={"objective": "cross_entropy
↪"},
                                         encrypt_param={"method": "iterativeAffine"},
                                         tree_param={"max_depth": 3})
evaluation_0 = Evaluation(name="evaluation_0", eval_type="binary")

# add components to pipeline, in order of task execution
pipeline.add_component(reader_0)\
    .add_component(dataio_0, data=Data(data=reader_0.output.data))\
    .add_component(intersect_0, data=Data(data=dataio_0.output.data))\
    .add_component(hetero_secureboost_0, data=Data(train_data=intersect_0.output.
↪data))\
    .add_component(evaluation_0, data=Data(data=hetero_secureboost_0.output.data))

# compile & fit pipeline
pipeline.compile().fit(JobParameters(backend=Backend.EGGROLL, work_mode=WorkMode.
↪STANDALONE))

# query component summary
print(f"Evaluation summary:\n{json.dumps(pipeline.get_component('evaluation_0').get_
↪summary(), indent=4)}")

# Evaluation summary:
# {
#   "auc": 0.9971790603033666,
#   "ks": 0.9624094920987263
# }

```

Code for the above job can also be found [here](#).

9.2 DSL

DSL is the first method FATE provides for constructing federated modeling jobs. For more information, please refer this [guide](#) on DSL.

Upgraded DSL(DSL v2) by FATE-v1.5 comes with the following major features:

1. Predictions DSL may now be configured through FATE-Flow cli. Please note that with new DSL training job will no longer automatically form prediction DSL; user needs to first form DSL manually with FATE-Flow cli before running prediction task.
2. New components may now be added to prediction DSL; for instance, evaluation module may be added to prediction task.
3. Standardize style of role_parameter and algorithm_parameter.

For DSL v2 examples, please refer [dsl/v2](#). For examples of the older version, please refer [dsl/v1](#). This is the “federatedml-1.x-examples” in older version. Please note that starting at version 1.6, FATE may no longer support DSL v1.

9.2.1 Cross Validation Task

Starting at version 1.6, cross validation tasks can output fold history data when `output_fold_history` is set to `True`. Output data contains either prediction `score` or original `instance` value. Please note that the `score` output from cross validation tasks may not be input to Evaluation module. All testsuites of modeling modules include demos on setting [cv parameters](#).

9.3 Benchmark Quality

Starting at FATE-v1.5, FATE provides modeling quality verifier for comparing modeling quality of centralized training and FATE federated modeling. As of v1.5, we have provided quality comparison scripts for the following common models:

- heterogeneous scenario: `LogisticRegression(benchmark_quality/hetero_lr), Secure-Boost(benchmark_quality/hetero_sbt), FastSecureBoost(benchmark_quality/hetero_fast_sbt), NN(benchmark_quality/hetero_nn).`
- homogeneous scenario: `LogisticRegression(benchmark_quality/homo_lr), Secure-Boost(benchmark_quality/homo_sbt), NN(benchmark_quality/homo_nn).`

Starting at v1.6, benchmark quality supports matching metrics from the same script. For more details, please refer to the [guide](#).

9.4 Upload Default Data

FATE provides a collection of publicly available data at [data](#) directory, along with a utility script for uploading all data sets. User may use the provided script to upload all pre-given data, or modify the corresponding configuration file for uploading arbitrary data. Please refer [scripts](#) for details.

Alternatively, user may use [FATE-Test](#) for uploading data.

9.5 Toy Example

FATE provides simple toy job for quick experiment when user developing FATE modules or testing for deployment. For details, please refer [toy_example](#).

9.6 Min-test


Min-test is used for deployment testing and quick modeling demo. Min-test includes tasks of hetero Logistic Regression and hetero SecureBoost. User only needs to configure few simple parameters to run a full modeling job with FATE. Please refer [min_test_task](#) for instructions.

English |

FATE FLOW

10.1 Introduction

FATE-Flow is the job scheduling system of the federated learning framework FATE, which realizes the complete management of the federated learning job life cycle, including data input, training job scheduling, indicator tracking, model center and other functions

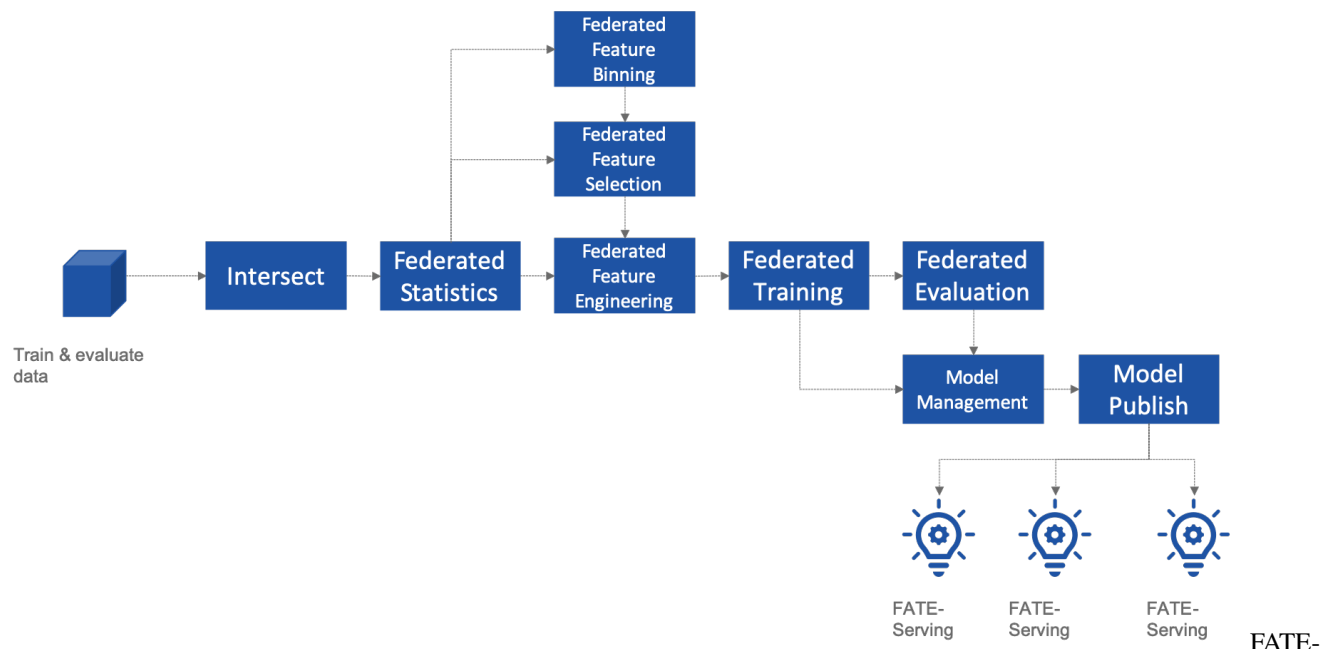


Flow Federated Learning Pipeline{.align-center}

10.1.1 FATE-Flow now supports

- DAG define Pipeline
- Describe DAG using FATE-DSL in JSON format
- Advanced scheduling framework, based on global state and optimistic lock scheduling, single-party DAG scheduling, multi-party coordinated scheduling, and support for multiple schedulers
- Flexible scheduling strategy, support start/stop/rerun, etc.
- Fine-grained resource scheduling capabilities, supporting core, memory, and working node strategies based on different computing engines

- Realtime tracker, real-time tracking data, parameters, models and indicators during operation
- Federated Learning Model Registry, model management, federated consistency, import and export, migration between clusters
- Provide CLI, HTTP API, Python SDK

10.2 Architecture

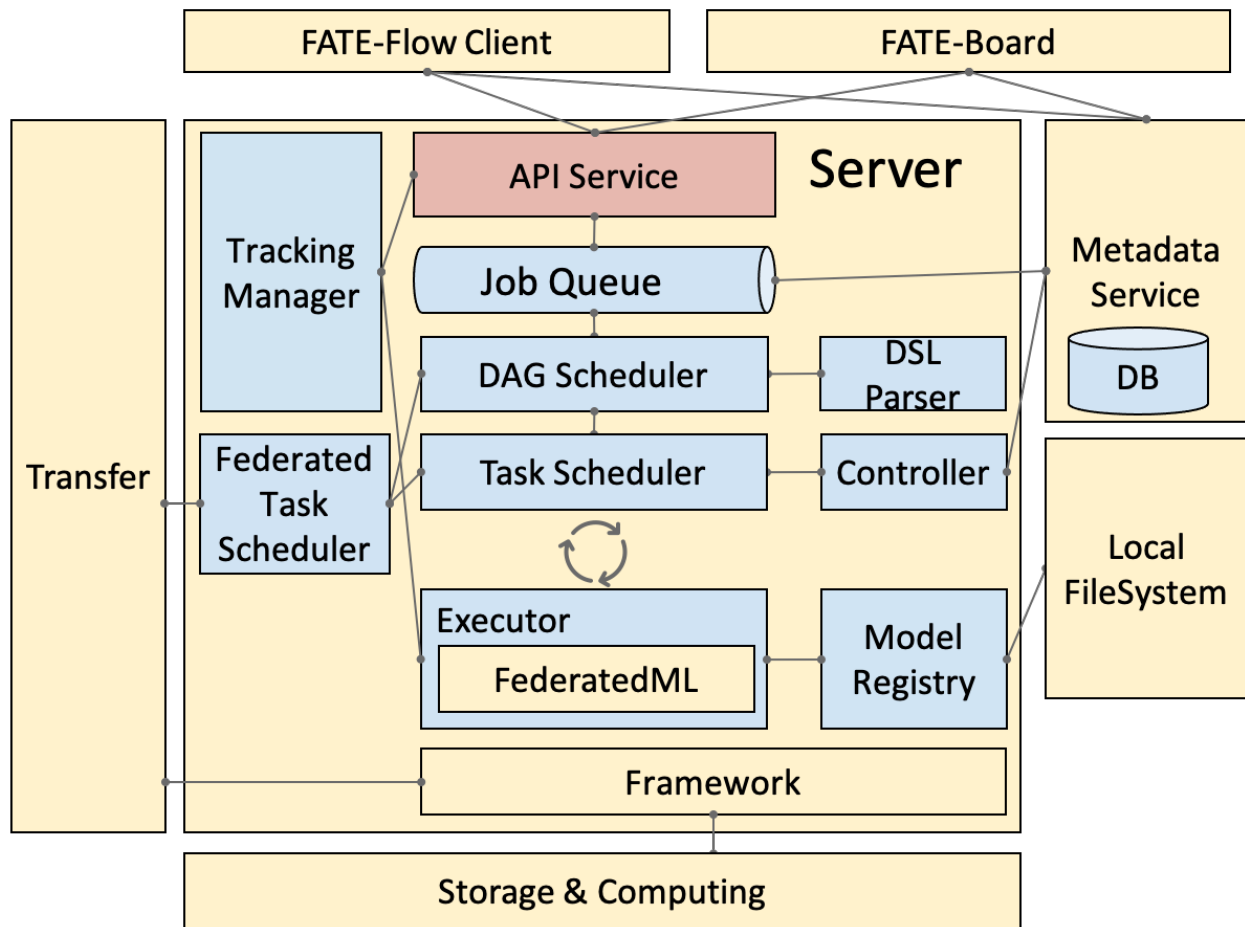

center}

fateflow_arch{.ali

10.3 Deploy

README

10.4 Usage

10.4.1 Command Line Interface v2

10.4.2 Python SDK

10.4.3 HTTP API

10.4.4 Training Examples

10.4.5 Online Inference Examples

10.5 Logs

FATE-Flow Server log

`$PROJECT_BASE/logs/fate_flow/`

Job log

`$PROJECT_BASE/logs/$job_id/`

10.6 FAQ

What is the role of FATE FLOW in the FATE?

:

FATE Flow is a scheduling system that schedules the execution of algorithmic components based on the DSL of the job submitted by the user.

ModuleNotFoundError

: No module named “arch”:

Set PYTHONPATH to the parent directory of fate_flow.

Why does the task show success when submitting the task, but the task fails on the dashboard page?

:

- Submit success just means that the job was submitted and not executed. If the job fails, you need to check the log.
- You can view the logs through the board.

What meaning and role do the guest, host, arbiter, and local roles represent in fate?

:

- Arbiter is used to assist multiple parties to complete joint modeling. Its main role is to aggregate gradients or models. For example, in vertical lr, each party sends half of its gradient to arbiter, and then arbiter jointly optimizes, etc.
- Guest represents the data application party.
- Host is the data provider.
- Local refers to local, only valid for upload and download.

Error about "cannot find xxxx" when killing a waiting job

:

Fate_flow currently only supports kill on the job initiator, kill will report "cannot find xxx".

What is the upload data doing?

:

Upload data is uploaded to eggroll and becomes a DTable format executable by subsequent algorithms.

How to download the generated data in the middle of the algorithm?

:

You can use

```
:    python fate_flow_client.py -f component_output_data -j $job_id -r
    $role -p $party_id -cpn $component_name -o $output_path
```

If the same file upload is executed twice, will fate delete the first data and upload it again?

:

It will be overwritten if the keys are the same in the same table.

What is the reason for the failure of this job without error on the board?

:

The logs in these places will not be displayed on the board: \$job_id/fate_flow_schedule.log, logs/error.log, logs/fate_flow/ERROR.log.

What is the difference between the load and bind commands?

:

Load can be understood as a model release, and bind is the default model version.

FATE-FLOW CLIENT COMMAND LINE INTERFACE

11.1 Usage

```
python fate_flow_client.py -f $command
```

11.2 JOB_OPERATE

11.2.1 submit_job

- description: submit a pipeline job
- parameter:
 - -c -config: runtime conf path, Required
 - -d -dsl: dsl path, Required

```
python fate_flow_client.py -f submit_job -c examples/test_hetero_lr_job_conf.json -  
↪ -d examples/test_hetero_lr_job_dsl.json
```

11.2.2 stop_job

- description: cancel job or stop job
- parameter:
 - -j -job_id: job id, Required

```
python fate_flow_client.py -f stop_job -j $job_id
```

11.2.3 query_job

- description: query job information by filters
- parameter:
 - -j -job_id: filter by job id, Optional
 - -r -role : filter by role, Optional
 - -p -party_id: filter by party id, Optional
 - -s -status: filter by status, Optional

```
python fate_flow_client.py -f query_job -j $job_id
```

11.2.4 clean_job

- description: clean processor,data table and metric data
- parameter:
 - -j -job_id: filter by job id, Optional
 - -r -role : filter by role, Optional
 - -p -party_id: filter by party id, Optional
 - -cpn -component_name: component name, Optional

```
python fate_flow_client.py -f clean_job -j $job_id
```

11.2.5 data_view_query

- description: query data view information by filters
- parameter:
 - j -job_id: filter by job id, Optional
 - r -role : filter by role, Optional
 - p -party_id: filter by party id, Optional
 - s -status: filter by status, Optional

```
python fate_flow_client.py -f data_view_query -j $job_id
```

11.3 JOB

11.3.1 job_config

- description: download the configuration of this job
- parameter:
 - -j -job_id: job id, Required
 - -r -role : role, Required

- -p -party_id: party id, Required
- -o -output_path: config output directory path, Required

```
python fate_flow_client.py -f job_config -j $job_id -r $role -p $party_id -o
↪$output_path
```

11.3.2 job_log

- description: download the log of this job
- parameter:
 - -j -job_id: job id, Required
 - -o -output_path: config output directory path, Required

```
python fate_flow_client.py -f job_log -j $job_id -o $output_path
```

11.4 TASK_OPERATE

11.4.1 query_task

- description: query task information by filters
- parameter:
 - -j -job_id: filter by job id, Optional
 - -cpn -component_name: filter by component name, Optional
 - -r -role : filter by role, Optional
 - -p -party_id: filter by party id, Optional
 - -s -status: filter by status, Optional

```
python fate_flow_client.py -f query_task -j $job_id
```

11.5 TRACKING

11.5.1 component_parameters

- description: query the parameters of this component
- parameter:
 - -j -job_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required

```
python fate_flow_client.py -f component_parameters -j $job_id -r $role -p $party_id -cpn $component_name
```

11.5.2 component_metric_all

- description: query all metric data
- parameter:
 - -j -job_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required

```
python fate_flow_client.py -f component_metric_all -j $job_id -r $role -p $party_id -cpn $component_name
```

11.5.3 component_metrics

- description: query the list of metrics
- parameter:
 - -j -job_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required

```
python fate_flow_client.py -f component_metrics -j $job_id -r $role -p $party_id -cpn $component_name
```

11.5.4 component_output_model

- description: query this component model
- parameter:
 - -j -job_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required

```
python fate_flow_client.py -f component_output_model -j $job_id -r $role -p $party_id -cpn $component_name
```

11.5.5 component_output_data

- description: download the output data of this component
- parameter:
 - -j -job_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required
 - -o -output_path: config output path, Required
 - -limit -limit: Limit quantity, Optional

```
python fate_flow_client.py -f component_output_data -j $job_id -r $role -p $party_
↪id -cpn $component_name -o $output_path
```

11.5.6 component_output_data_table

- description: view table name and namespace
- parameter:
 - -j -ob_id: job id, Required
 - -cpn -component_name: component name, Required
 - -r -role: role, Required
 - -p -party_id: party id, Required

```
python fate_flow_client.py -f component_output_data_table -j $job_id -r $role -p
↪$party_id -cpn $component_name
```

11.5.7 DATA

download

- description: download table
- parameter:
 - -c -config: config path, Required

```
python fate_flow_client.py -f download -c examples/download_guest.json
```

upload

- description: upload table
- parameter:
 - -c –config: config path, Required
 - -drop –drop: Operations before file upload, Optional

```
python fate_flow_client.py -f upload -c examples/upload_guest.json
python fate_flow_client.py -f upload -c examples/upload_guest.json -drop 0(or1)
```

upload_history

- description: upload table history
- parameter:
 - -j –job_id: job id, Optional
 - -limit –limit: Limit quantity, Optional

```
python fate_flow_client.py -f upload_history -j $job_id
python fate_flow_client.py -f upload_history -limit 5
```

11.5.8 Table

table_info

- description: query table information
- parameter:
 - -n –namespace: namespace, Required
 - -t –table_name: table name, Required

```
python fate_flow_client.py -f table_info -n $namespace -t $table_name
```

table_delete

- description: delete table
- parameter:
 - -n –namespace: namespace, Optional
 - -t –table_name: table name, Optional
 - -j –job_id: job id, Optional
 - -cpn –component_name: component name, Optional
 - -r –role: role, Optional
 - -p –party_id: party id, Optional

```
python fate_flow_client.py -f table_delete -n $namespace -t $table_name
python fate_flow_client.py -f table_delete -j $job_id
```

11.5.9 Model

load

- description: load model.
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f load -c $conf_path
```

- response example:

```
{
  "data": {
    "detail": {
      "guest": {
        "9999": {
          "retcode": 0,
          "retmsg": "xxx"
        }
      },
      "host": {
        "10000": {
          "retcode": 0,
          "retmsg": "xxx"
        }
      }
    },
    "guest": {
      "9999": 0
    },
    "host": {
      "10000": 0
    }
  },
  "jobId": "xxxxxxxxxxxxxxxx",
  "retcode": 0,
  "retmsg": "success"
}
```

bind

- description: bind model.
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f bind -c $conf_path
```

- response example:

```
{  
  "retcode": 0,  
  "retmsg": "service id is xxx"  
}
```

store

- description: store model
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f store -c $conf_path
```

restore

- description: restore mode
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f restore -c $conf_path
```

export

- description: export model
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f export -c $conf_path
```

import

- description: import model
- parameter:
 - -c –config: config path, Required

```
python fate_flow_client.py -f import -c $conf_path
```


FATE-FLOW REST API

- HTTP Method: POST
- Content-Type: application/json

12.1 DataAccess

12.1.1 /v1/data/upload

- request structure
 - namespace: Required,String: upload data table namespace
 - table_name: Required,String: upload data table name
 - work_mode: Required,Integer: eggroll's working mode
 - file: Required, String: upload file location
 - head: Required,Integer: determine if there is a data header
 - partition: Required,Integer: set the number of partitions to save data
 - module: Optional,String: If you need to use the data of the machine where the FATE-Flow server is located, this value is not empty.
 - use_local_data: Optional,String: If you need to use the data of the machine where the FATE-Flow server is located, this value is 0.
 - drop: Optional, Integer: When the cluster deployment uses the same table to upload data, it is necessary to carry the drop parameter,0 represents overwriting upload, 1 represents deleting the previous data and re-uploading
- response structure
 - job_id: upload job id,String
 - data: return data for submitting job ,Object

12.1.2 /v1/data/download

- request structure
 - namespace: Required,String: download data table namespace
 - table_name: Required,String: download data table name
 - output_path: Required, String: download file location
 - work_mode: Required,Integer:working mode
 - delimiter: Optional,String: download data delimiter
- response structure
 - job_id: download job id,String
 - data: return data for submitting job ,Object

12.1.3 /v1/data/upload/history

- request structure
 - job_id: Optional,String:download job id
 - limit: Optional, Integer:Limit quantity
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: return data for submitting job ,Object

12.2 Job

12.2.1 /v1/job/submit

- request structure
 - job_runtime_conf: Required,Object: configuration information for the currently submitted job
 - job_dsl: Required,Object: dsl of the currently submitted job
- response structure
 - job_id: job id of the currently submitted job,String
 - data: return data for submitting job ,Object

12.2.2 /v1/job/stop

- request structure
 - job_id: Required, String: job id
- response structure
 - job_id: job id of the currently submitted job,String
 - retmsg: return code description,String

12.2.3 /v1/job/query

- request structure
 - job_id: Optional,String: job id
 - name: Optional,String: job name
 - description: Optional,String: job description
 - tag: Optional,String:Optional,String: job tag
 - role: Optional,String: job role
 - party_id: Optional,String: job party id
 - roles: Optional,String: job roles
 - initiator_party_id: Optional,String: initiator's party id
 - is_initiator: Optional,Integer: mark if it is the initiator
 - dsl: Optional,String: job dsl
 - runtime_conf : Optional,String: configuration information for the job
 - run_ip: Optional,String: job run ip
 - status: Optional,String: job status
 - current_steps: Optional,String:record component id in DSL
 - current_tasks: Optional,String: record task id
 - progress: Optional,Integer: job progress
 - create_time: Optional,Integer: job create time
 - update_time: Optional,Integer:job update time
 - start_time: Optional,Integer: job start time
 - end_time: Optional,Integer: job end time
 - elapsed: Optional,Integer: job elapsed time
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: job data, Array

12.2.4 /v1/job/update

- request structure
 - job_id: Required,String: job id
 - role: Required,String: job role
 - party_id: Required,String: job party id
 - notes: Required, String: remark Information
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String

12.2.5 /v1/job/config

- request structure
 - job_id: Optional,String: job id
 - name: Optional,String: job name
 - description: Optional,String: job description
 - tag: Optional,String:Optional,String: job tag
 - role: Optional,String: job role
 - party_id: Optional,String: job party id
 - roles: Optional,String: job roles
 - initiator_party_id: Optional,String: initiator's party id
 - is_initiator: Optional,Integer: mark if it is the initiator
 - dsl: Optional,String: job dsl
 - runtime_conf : Optional,String: configuration information for the job
 - run_ip: Optional,String: job run ip
 - status: Optional,String: job status
 - current_steps: Optional,String:record component id in DSL
 - current_tasks: Optional,String: record task id
 - progress: Optional,Integer: job progress
 - create_time: Optional,Integer: job create time
 - update_time: Optional,Integer:job update time
 - start_time: Optional,Integer: job start time
 - end_time: Optional,Integer: job end time
 - elapsed: Optional,Integer: job elapsed time
- response structure
 - retcode: return code,Integer

- retmsg: return code description,String
- data: config data, Object

12.2.6 /v1/job/task/query

- request structure
 - job_id: Optional,String: job id
 - name: Optional,String: job name
 - description: Optional,String: job description
 - tag: Optional,String:Optional,String: job tag
 - role: Optional,String: job role
 - party_id: Optional,String: job party id
 - roles: Optional,String: job roles
 - initiator_party_id: Optional,String: initiator's party id
 - is_initiator: Optional,Integer: mark if it is the initiator
 - dsl: Optional,String: job dsl
 - runtime_conf : Optional,String: configuration information for the job
 - run_ip: Optional,String: job run ip
 - status: Optional,String: job status
 - current_steps: Optional,String:record component id in DSL
 - current_tasks: Optional,String: record task id
 - progress: Optional,Integer: job progress
 - create_time: Optional,Integer: job create time
 - update_time: Optional,Integer:job update time
 - start_time: Optional,Integer: job start time
 - end_time: Optional,Integer: job end time
 - elapsed: Optional,Integer: job elapsed time
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: tasks data, Array

12.2.7 /v1/job/list/job

- request structure
 - limit: Optional, Integer: limitation of number of return records
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: info of jobs, Array

12.2.8 /v1/job/list/task

- request structure
 - limit: Optional, Integer: limitation of number of return records
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: info of tasks, Array

12.2.9 /v1/job/dsl/generate

- request structure
 - train_dsl: Required, String: training dsl
 - cpn_str: Required, String or Array: list of components which are chose to be used
 - filename: Optional, String: generated dsl storing path
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: generated dsl, Array

12.2.10 Tracking

12.2.11 /v1/tracking/job/data_view

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String

- data: job view data,Object

12.2.12 /v1/tracking/component/metric/all

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer
 - component_name: Required,String: component name
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: all metric data,Object

12.2.13 /v1/tracking/component/metrics

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer
 - component_name: Required,String: component name
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: metrics data,Object

12.2.14 /v1/tracking/component/metric_data

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
 - component_name: Required,String: component name
 - meric_name: Required,String: metric name
 - metric_namespace: Required,String: metric namespace
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String

- data: metric data, Array
- meta: metric meta, Object

12.2.15 /v1/tracking/component/parameters

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
 - component_name: Required,String: component name
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: output parameters, Object

12.2.16 /v1/tracking/component/output/model

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
 - component_name: Required,String: component name
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: output model, Object
 - meta: component model meta, Object

12.2.17 /v1/tracking/component/output/data

- request structure
 - job_id: Required,String: job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
 - component_name: Required,String: component name
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

- data: output data, Array
- meta: schema header information, Object

12.2.18 Pipeline

12.2.19 /v1/pipeline/dag/dependency

- request structure
 - job_id: Required,String:job id
 - role: Required,String: role information
 - party_id: Required,Integer: party id
- response structure
 - retcode: return code,Integer
 - retmsg: return code description,String
 - data: pipeline dag dependency data,Object

12.2.20 Model

12.2.21 /v1/model/load

- request structure
 - initiator: Required,Object: job initiator information, including party_id and role
 - job_parameters: Required,Object: job parameters information, including work_mode, model_id and model_version
 - role: Required,Object: role information of the parties
 - servings: Optional,Array: fate serving address and port
- response structure
 - job_id:job id, String
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: status info, Object

12.2.22 /v1/model/bind

- request structure
 - service_id: Required,String: service id
 - initiator: Required,Object: job initiator information, including party_id and role
 - job_parameters: Required,Object: job parameters information, including work_mode, model_id and model_version
 - role: Required,Object: role information of the parties

- servings: Optional,Array: fate serving address and port
- response structure
 - retcode: return code, Integer

12.2.23 /v1/model/transfer

- request structure
 - name: Required,String: model version
 - namespace: Required,String: model id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: model data, Object

12.2.24 /v1/model/import

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - role: Required, String: role
 - party_id: Required, String: party id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.25 /v1/model/export

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - role: Required, String: role
 - party_id: Required, String: party id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.26 /v1/model/store

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - role: Required, String: role
 - party_id: Required, String: party id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.27 /v1/model/restore

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - role: Required, String: role
 - party_id: Required, String: party id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.28 /v1/model/model_tag/retrieve

- request structure
 - job_id: Required, Integer: a valid job id or model version
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: information of tags related to the specified model

12.2.29 /v1/model/model_tag/create

- request structure
 - job_id: Required, Integer: a valid job id or model version
 - tag_name: Required, String: a valid name of tag
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.30 /v1/model/model_tag/remove

- request structure
 - job_id: Required, Integer: a valid job id or model version
 - tag_name: Required, String: a valid name of tag
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.31 /v1/model/tag/retrieve

- request structure
 - tag_name: Required, String: a valid tag name
 - with_model: Optional, Boolean: choose to show tag info or tag info related to models
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: tag info, Object

12.2.32 /v1/model/tag/create

- request structure
 - tag_name: Required, String: name of tag
 - tag_desc: Optional, String: description of tag
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.33 /v1/model/tag/destroy

- request structure
 - tag_name: Required, String: a valid tag name
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.34 /v1/model/tag/update

- request structure
 - tag_name: Required, String: a valid tag name
 - new_tag_name: Optional, String: a new name to replace previous name
 - new_tag_desc: Optional, String: a new decription to replace previous description
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String

12.2.35 /v1/model/tag/list

- request structure
 - limit: Required, Integer: limitation of number of return records
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: tag info, Object

12.2.36 /v1/model/migrate

- request structure
 - migrate_initiator: Required, Object: indicates which party is the new initiator after migrating
 - unify_model_version: Optional, String: a unitive model version for migrate model
 - role: Required, String: information of roles which participated in model training, including role name and array of party ids
 - migrate_role: Required, Object: information of roles model would be migrated to, including role name and array of party ids
 - model_id: Required, String: original model id
 - model_version: Required, Integer: original model version
 - execute_party: Required, Object: parties that is going to execute model migration task
 - job_parameters: Required, Object: job parameters information, including work_mode, model_id and model_version
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: status info, Object

12.2.37 /v1/model/query

- request structure
 - model_version: Required, Integer: model version
 - model_id: Optional, String: model id
 - role: Optional, String: role
 - party_id: Optional, String: party id
 - query_filters: Optional, Array: features filters
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: model info, Object

12.2.38 /v1/model/deploy

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - cpn_list: Optional, String: array-like string that contains components
 - cpn_path: Optional, String: file path of plain text which stores component list
 - dsl_path: Optional, String: file path of plain text which stores dsl content
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: status info, Object

12.2.39 /v1/model/get/predict/dsl

- request structure
 - model_version: Required, Integer: model version
 - model_id: Optional, String: model id
 - role: Optional, String: role
 - party_id: Optional, String: party id
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: predict dsl of specified model, Object

12.2.40 /v1/model/get/predict/conf

- request structure
 - model_version: Required, Integer: model version
 - model_id: Required, String: model id
 - filename: Optional, String: file storing path
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: predict config of specified model, Object

12.3 Table

12.3.1 /v1/table/table_info

- request structure
 - create: Optional, Boolean: whether to create
 - namespace: Optional, String: download data table namespace, need to be used with table_name
 - table_name: Optional, String: download data table name, need to be used with namespace
 - local: Optional, Object: local configuration
 - role: Optional, Object: role information
 - data_type: Optional, String: download file data type
 - gen_table_info: Optional, Boolean: tag table information
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: table information

12.3.2 /v1/table/delete

- request structure
 - namespace: Optional, String: download data table namespace, need to be used with table_name
 - table_name: Optional, String: download data table name, need to be used with namespace
- response structure
 - retcode: return code, Integer
 - retmsg: return code description, String
 - data: table information

FATE FLOW CLIENT SDK GUIDE

[]

13.1 Usage

```
from flow_sdk.client import FlowClient
# use real ip address to initialize SDK
client = FlowClient('127.0.0.1', 9000, 'v1')
```

13.2 Job Operations

13.2.1 Usage

```
client.job.submit(conf_path, dsl_path)
```

13.2.2 Functions

`submit(conf_path, dsl_path)`

- *Description* Submit a pipeline job.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Runtime configuration file path
2	dsl_path	string	Yes	DSL file path

stop(job_id)

- *Description*Cancel or stop a specified job.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id

query(job_id=None, role=None, party_id=None, status=None)

- *Description*Query job information by filters.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	No	A valid job id
2	role	string	No	Role
3	party_id	integer	No	Party id
4	status	string	No	Job Status

config(job_id, role, party_id, output_path)

- *Description*Download the configuration of a specified job.
- *Arguments*

No	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	output_path	string	Yes	Specified Output Path

log(job_id, output_path)

- *Description*Download log files of a specified job.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	output_path	string	Yes	Specified Output Path

```
list(limit=10)
```

- *Description*List jobs.
- *Arguments*

No.	Argument	Type	Required	Description
1	limit	integer	No	Limit the number of results, default is 10

```
view(job_id=None, role=None, party_id=None, status=None)
```

- *Description*List jobs.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	No	A valid job id
2	role	string	No	Role
3	party_id	integer	No	Party id
4	component_name	string	No	Component Name

```
generate_dsl(train_dsl_path, cpn_file_path=None, cpn_list = None)
```

- *Description*A predict dsl generator.
- *Arguments*

No.	Argument	Type	Required	Description
1	train_dsl_path	string(path)	Yes	User specifies the train dsl file path.
2	version	string	No	Specified version of dsl parser. Default 1.
3	cpn_file_path	string(path)	No	User specifies a file path which records the component list.
4	cpn_list	list	No	User inputs a list of component names.

13.3 Component Operations

13.3.1 Usage

```
client.component.parameters(job_id, role, party_id, component_name)
```

13.3.2 Functions

```
parameters(job_id, role, party_id, component_name)
```

- *Description*Query the parameters of a specified component.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

`metric_all(job_id, role, party_id, component_name)`

- *Description*Query all metric data.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

`metrics(job_id, role, party_id, component_name)`

- *Description*Query all metric data.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

`metric_delete(date=None, job_id=None)`

- *Description*Delete specified metric.
- *Arguments*

No.	Argument	Type	Required	Description
1	date	integer	Yes	An 8-Digit Valid Date, Format Like 'YYYYMMDD'
2	job_id	integer	Yes	A valid job id

Notice: If you input two optional arguments in the mean time, the 'date' argument will be detected in priority while the 'job_id' argument would be ignored.

`output_model(job_id, role, party_id, component_name)`

- *Description* Query a specified component model.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

`output_data(job_id, role, party_id, component_name, output_path, limit=10)`

- *Description* Download the output data of a specified component.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name
5	output_path	string	Yes	Specified Output directory path
6	limit	integer	No	Limit the number of results, default is 10

`output_data_table(job_id, role, party_id, component_name)`

- *Description* View table name and namespace.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

`list(job_id)`

- *Description* List components of a specified job.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id

`get_summary(job_id, role, party_id, component_name)`

- *Description*Get summary of specified component.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	role	string	Yes	Role
3	party_id	integer	Yes	Party id
4	component_name	string	Yes	Component Name

13.4 Data Operations

13.4.1 Usage

```
client.data.download(conf_path)
```

13.4.2 Functions

`download(conf_path)`

- *Description*Download Data Table.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path

`upload(conf_path, verbose=0, drop=0)`

- *Description*Upload Data Table.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path
2	verbose	integer	No	Verbose mode, 0 (default) means 'disable', 1 means 'enable'
3	drop	integer	No	If 'drop' is set to be 0 (default), when data had been uploaded before, current upload task would be rejected. If 'drop' is set to be 1, data of old version would be replaced by the latest version.

```
upload_history(limit=10, job_id=None)
```

- *Description* Query Upload Table History.
- *Arguments*

No.	Argument	Type	Required	Description
1	limit	integer	No	Limit the number of results, default is 10
2	job_id	integer	No	A valid job id

13.5 Task Operations

13.5.1 Usage

```
client.task.list(limit=10)
```

13.5.2 Functions

```
list(limit=10)
```

- *Description* List tasks.
- *Arguments*

No.	Argument	Type	Required	Description
1	limit	integer	No	Limit the number of results, default is 10

```
query(job_id=None, role=None, party_id=None, component_name=None, status=None)
```

- *Description* Query task information by filters.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	No	A valid job id.
2	role	string	No	Role
3	party_id	integer	No	Party ID
4	component_name	string	No	Component Name
5	status	string	No	Job Status

13.6 Model Operations

13.6.1 Usage

```
client.model.load(conf_path)
```

13.6.2 Functions

`load(conf_path=None, job_id=None)`

- *Description* Load model.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	No	Configuration file path
2	job_id	string	No	A valid job id

`bind(conf_path, job_id=None)`

- *Description* Bind model.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path
2	job_id	string	No	A valid job id

`export_model(conf_path, to_database=False)`

- *Description* Export model.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path
2	to_database	bool	No	If specified and there is a valid database environment, fate flow will export model to database which you specified in configuration file.

```
import_model(conf_path, from_database=False)
```

- *Description* Import model.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path
2	from_database	bool	No	If specified and there is a valid database environment, fate flow will import model from database which you specified in configuration file.

```
migrate(conf_path, to_database=False)
```

- *Description* Migrate model.
- *Arguments*

No.	Argument	Type	Required	Description
1	conf_path	string	Yes	Configuration file path
2	to_database	bool	No	If specified and there is a valid database environment, fate flow will export model to database which you specified in configuration file.

```
tag_list(job_id)
```

- *Description* List tags of model.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id

```
tag_model(job_id, tag_name, remove=False)
```

- *Description* Tag model.
- *Arguments*

No.	Argument	Type	Required	Description
1	job_id	integer	Yes	A valid job id
2	tag_name	string	Yes	The name of tag
3	remove	bool	No	If specified, the name of specified model will be removed from the model name list of specified tag.

```
deploy(model_id, model_version=None, cpn_list=None, predict_dsl=None)
```

- *Description* Deploy model.
- *Arguments*

No.	Argument	Type	Required	Description
1	model_id	string	Yes	Parent model id
2	model_version	string	Yes	Parent model version
3	cpn_list	list	No	Component list
4	predict_dsl	dict	No	Predict DSL

```
get_predict_dsl(model_id, model_version)
```

- *Description* Get predict dsl of model.
- *Arguments*

No.	Argument	Type	Required	Description
1	model_id	string	Yes	Parent model id
2	model_version	string	Yes	Parent model version

```
get_predict_conf(model_id, model_version)
```

- *Description* Get predict conf of model.
- *Arguments*

No.	Argument	Type	Required	Description
1	model_id	string	Yes	Parent model id
2	model_version	string	Yes	Parent model version

```
get_model_info(model_id=None, model_version=None, role=None, party_id=None,  
query_filters=None, **kwargs)
```

- *Description* Get information of model.
- *Arguments*

No.	Argument	Type	Required	Description
1	model_id	string	No	model id
2	model_version	string	Yes	model version
3	role	string	No	role name
4	party_id	string	No	party id
5	query_filters	list	No	query filters

13.7 Tag Operations

13.7.1 Usage

```
client.tag.create(tag_name, desc)
```

13.7.2 Functions

create(tag_name, tag_desc=None)

- *Description* Create Tag.
- *Arguments*

No.	Argument	Type	Required	Description
1	tag_name	string	Yes	The name of tag
2	tag_desc	string	No	The description of tag

update(tag_name, new_tag_name=None, new_tag_desc=None)

- *Description* Update information of tag.
- *Arguments*

No.	Argument	Type	Required	Description
1	tag_name	string	Yes	The name of tag
2	new_tag_name	string	No	New name of tag
3	new_tag_desc	string	No	New description of tag

list(limit=10)

- *Description* List recorded tags.
- *Arguments*

No.	Argument	Type	Required	Description
1	limit	integer	No	Number of records to return. (default: 10)

query(tag_name, with_model=False)

- *Description* Retrieve tag.
- *Arguments*

No.	Argument	Type	Required	Description
1	tag_name	string	Yes	The name of tag
2	with_model	bool	No	If specified, the information of models which have the tag custom queried would be displayed

`delete(tag_name)`

- *Description* Delete tag.
- *Arguments*

No.	Argument	Type	Required	Description
1	tag_name	string	Yes	The name of tag

13.8 Table Operations

13.8.1 Usage

```
client.table.info(namespace, table_name)
```

13.8.2 Functions

`info(namespace, table_name)`

- *Description* Query table information.
- *Arguments*

No.	Argument	Type	Required	Description
1	namespace	string	Yes	Namespace
2	table_name	string	Yes	Table Name

`delete(namespace=None, table_name=None, job_id=None, role=None, party_id=None, component_name=None)`

- *Description* Delete table.
- *Arguments*

No.	Argument	Type	Required	Description
1	namespace	string	No	Namespace
2	table_name	string	No	Table Name
3	job_id	integer	No	A valid job id
4	role	string	No	Role
5	party_id	integer	No	Party id
6	component_name	string	No	Component Name

13.9 Queue Operations

13.9.1 Usage

```
client.queue.clean()
```

13.9.2 Functions

`clean()`

- *Description*Cancel all jobs in queue.
- *Arguments*None

FATE-FLOW CLIENT COMMAND LINE INTERFACE V2 GUIDE

[]

14.1 Usage

Before using fate flow client command line interface (CLI), please make sure that you have activated the virtual environment of FATE. For more details about how to activate virtual environment, please read the documentation of deployment.

In this version of client CLI, commands are separated into several classes, including *job*, *data*, *model*, *component* and etc. And all of these classes have a common parent (CLI entry) named '*flow*', which means you can type '*flow*' in your terminal window to find out all of these classes and also their sub-commands.

```
[IN]
flow

[OUT]
Usage: flow [OPTIONS] COMMAND [ARGS]...

    Fate Flow Client

Options:
  -h, --help  Show this message and exit.

Commands:
  component  Component Operations
  data       Data Operations
  job        Job Operations
  model      Model Operations
  queue      Queue Operations
  table      Table Operations
  task       Task Operations
```

For more details, please check this [documentation](#) or try `flow --help` for help.

14.2 Init

14.2.1 init

- *Description:* Flow CLI Init Command. Custom can choose to provide an absolute path of server conf file, or provide ip address and http port of a valid fate flow server. Notice that, if custom provides both, the server conf would be loaded in priority. In this case, ip address and http port would be ignored.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--server-conf-path	No	Server configuration file absolute path
2	ip		--ip	No	Fate flow server ip address
3	port		--port	No	Fate flow server port
4	reset		--reset	No	If specified, initialization settings of flow CLI would be reset to none.

- *Examples:*

```
flow init -c /data/projects/fate/python/conf/service_conf.yaml
flow init --ip 127.0.0.1 --port 9380
```

14.3 Job

14.3.1 submit

- *Description:* Submit a pipeline job.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Runtime configuration file path
2	dsl_path	-d	--dsl-path	Yes	Domain-specific language(DSL) file path. If the type of job is 'predict', you can leave this feature blank, or you can provide a valid dsl file to replace the one that automatically generated by fate.

- *Examples:*

```
flow job submit -c fate_flow/examples/test_hetero_lr_job_conf.json -d fate_flow/
↳ examples/test_hetero_lr_job_dsl.json
```

14.3.2 stop

- *Description:* Cancel or stop a specified job.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.

- *Examples:*

```
flow job stop -j $JOB_ID
```

14.3.3 query

- *Description:* Query job information by filters.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	No	A valid job id.
2	role	-r	--role	No	Role
3	party_id	-p	--party_id	No	Party ID
4	status	-s	--status	No	Job Status

- *Examples:*

```
flow job query -r guest -p 9999 -s complete
flow job query -j $JOB_ID
```

14.3.4 view

- *Description:* Query data view information by filters.
- *Arguments:*
- *Examples:*

```
flow job view -j $JOB_ID -s complete
```

14.3.5 config

- *Description:* Download the configuration of a specified job.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	output_path	-o	--output-path	Yes	Output Path

- *Examples*

```
flow job config -j $JOB_ID -r host -p 10000 --output-path ./examples/
```

14.3.6 log

- *Description:* Download log files of a specified job.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.
2	output_path	-o	--output-path	Yes	Output Path

- *Examples:*

```
flow job log -j JOB_ID --output-path ./examples/
```

14.3.7 list

- *Description:* List jobs.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	limit	-l	--limit	No	Number of records to return. (default: 10)

- *Examples:*

```
flow job list
flow job list -l 30
```

14.3.8 dsl

- *Description:* A predict dsl generator.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	cpn_list		--cpn-list	No	User inputs a string to specify component list.
2	cpn_path		--cpn-path	No	User specifies a file path which records the component list.
3	train_dsl_path		--train-dsl-path	Yes	User specifies the train dsl file path.
4	output_path	-o	--output-path	No	User specifies output directory path.

- *Examples:*

```
flow job dsl --cpn-path fate_flow/examples/component_list.txt --train-dsl-path fate_
↪flow/examples/test_hetero_lr_job_dsl.json

flow job dsl --cpn-path fate_flow/examples/component_list.txt --train-dsl-path fate_
↪flow/examples/test_hetero_lr_job_dsl.json -o fate_flow/examples/
```

(continues on next page)

(continued from previous page)

```

flow job dsl --cpn-list "dataio_0, hetero_feature_binning_0, hetero_feature_selection_
↪0, evaluation_0" --train-dsl-path fate_flow/examples/test_hetero_lr_job_dsl.json -o_
↪fate_flow/examples/

flow job dsl --cpn-list [dataio_0,hetero_feature_binning_0,hetero_feature_selection_0,
↪evaluation_0] --train-dsl-path fate_flow/examples/test_hetero_lr_job_dsl.json -o_
↪fate_flow/examples/

```

14.4 Component (TRACKING)

14.4.1 parameters

- *Description:* Query the arguments of a specified component.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name

- *Examples:*

```

flow component parameters -j $JOB_ID -r host -p 10000 -cpn hetero_feature_binning_0

```

14.4.2 metric-all

- *Description:* Query all metric data.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name

- *Examples:*

```

flow component metric-all -j $JOB_ID -r host -p 10000 -cpn hetero_feature_binning_
↪0

```

14.4.3 metrics

- *Description:* Query the list of metrics.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	A valid job id.
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name

- *Examples:*

```
flow component metrics -j $JOB_ID -r host -p 10000 -cpn hetero_feature_binning_0
```

14.4.4 metric-delete

- *Description:* Delete specified metric.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	date	-d	--date	No	An 8-Digit Valid Date, Format Like 'YYYYMMDD'
2	job_id	-j	--job_id	No	Job ID

- *Examples:*

```
# NOTICE: If you input both two optional arguments, the 'date' argument will be
↳detected in priority while the 'job_id' argument would be ignored.
flow component metric-delete -d 20200101
flow component metric-delete -j $JOB_ID
```

14.4.5 output-model

- *Description:* Query a specified component model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	Job ID
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name

- *Examples:*

```
flow component output-model -j $JOB_ID -r host -p 10000 -cpn hetero_feature_
↳binning_0
```

14.4.6 output-data

- *Description:* Download the output data of a specified component.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Re- quired	Description
1	job_id	-j	--job_id	Yes	Job ID
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name
5	output_path	-o	--output-path	Yes	User specifies output directory path
6	limit	-l	--limit	No	Number of records to return, default -1 means return all data

- *Examples:*

```
flow component output-data -j $JOB_ID -r host -p 10000 -cpn hetero_feature_
↪binning_0 --output-path ./examples/
```

14.4.7 output-data-table

- *Description:* View table name and namespace.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	Job ID
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	component_name	-cpn	--component_name	Yes	Component Name

- *Examples:*

```
flow component output-data-table -j $JOB_ID -r host -p 10000 -cpn hetero_feature_
↪binning_0
```

14.4.8 list

- *Description:* List components of a specified job.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	Job ID

- *Examples:*

```
flow component list -j $JOB_ID
```

14.4.9 get-summary

- *Description:* Download summary of a specified component and save it as a json file.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Re-quired	Description
1	job_id	-j	--job_id	Yes	Job ID
2	role	-r	--role	Yes	Role
3	party_id	-p	--party_id	Yes	Party ID
4	compo- nent_name	-cpn	--component_name	Yes	Component Name
5	output_path	-o	--output-path	No	User specifies output directory path

- *Examples:*

```
flow component get-summary -j $JOB_ID -r host -p 10000 -cpn hetero_feature_binning_0
flow component get-summary -j $JOB_ID -r host -p 10000 -cpn hetero_feature_binning_0 -
↪o ./examples/
```

14.5 Model

14.5.1 load

- *Description:* Load model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	No	Runtime configuration file path
2	job_id	-j	--job_id	No	Job ID

- *Examples:*

```
flow model load -c fate_flow/examples/publish_load_model.json
flow model load -j $JOB_ID
```

14.5.2 bind

- *Description:* Bind model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Runtime configuration file path
2	job_id	-j	--job_id	No	Job ID

- *Examples:*

```
flow model bind -c fate_flow/examples/bind_model_service.json
flow model bind -c fate_flow/examples/bind_model_service.json -j $JOB_ID
```

14.5.3 import

- *Description:* Import model
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Runtime configuration file path
2	from-database		--from-database	No	If specified and there is a valid database environment, fate flow will import model from database which you specified in configuration file.

- *Examples:*

```
flow model import -c fate_flow/examples/import_model.json
flow model import -c fate_flow/examples/restore_model.json --from-database
```

14.5.4 export

- *Description:* Export model
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Runtime configuration file path
2	to-database		--to-database	No	If specified and there is a valid database environment, fate flow will export model to database which you specified in configuration file.

- *Examples:*

```
flow model export -c fate_flow/examples/export_model.json
flow model export -c fate_flow/example/store_model.json --to-database
```

14.5.5 migrate

- *Description:* Migrate model
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Runtime configuration file path

- *Examples:*

```
flow model migrate -c fate_flow/examples/migrate_model.json
```

14.5.6 tag-list

- *Description:* List tags of model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	Job ID

- *Examples:*

```
flow model tag-list -j $JOB_ID
```

14.5.7 tag-model

- *Description:* Tag model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	Yes	Job ID
2	tag_name	-t	--tag_name	Yes	The name of tag
3	remove		--remove	No	If specified, the name of specified model will be removed from the model name list of specified tag.

- *Examples:*

```
flow model tag-model -j $JOB_ID -t $TAG_NAME
flow model tag-model -j $JOB_ID -t $TAG_NAME --remove
```

14.5.8 deploy

- *Description:* Deploy model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	model_id		--model-id	Yes	Parent model id.
2	model_version		--model-version	Yes	Parent model version.
3	cpn_list		--cpn-list	No	User inputs a string to specify component list.
4	cpn_path		--cpn-path	No	User specifies a file path which records the component list.
5	dsl_path		--train-dsl-path	No	User specified predict dsl file.

- *Examples:*

```
flow model deploy --model-id $MODEL_ID --model-version $MODEL_VERSION
```

14.5.9 get-predict-dsl

- *Description:* Get predict dsl of model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	model_id		--model-id	Yes	Model id
2	model_version		--model-version	Yes	Model version
3	output_path	-o	--output-path	Yes	Output directory path

- *Examples:*

```
flow model get-predict-dsl --model-id $MODEL_ID --model-version $MODEL_VERSION -o ./
↪examples/
```

14.5.10 get-predict-conf

- *Description:* Get predict conf template of model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	model_id		--model-id	Yes	Model id
2	model_version		--model-version	Yes	Model version
3	output_path	-o	--output-path	Yes	Output directory path

- *Examples:*

```
flow model get-predict-conf --model-id $MODEL_ID --model-version $MODEL_VERSION -o ./
↪examples/
```

14.5.11 get-model-info

- *Description:* Get information of model.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	model_id		--model-id	No	Model id
2	model_version		--model-version	Yes	Model version
3	role	-r	--role	No	Role
2	party_id	-p	--party-id	No	Party ID
3	detail		--detail	No	Show details

- *Examples:*

```
flow model get-model-info --model-id $MODEL_ID --model-version $MODEL_VERSION
flow model get-model-info --model-id $MODEL_ID --model-version $MODEL_VERSION --detail
```

14.6 Tag

14.6.1 create

- *Description:* Create tag.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	tag_name	-t	--tag-name	Yes	The name of tag
2	tag_description	-d	--tag-desc	No	The description of tag

- *Examples:*

```
flow tag create -t tag1 -d "This is the description of tag1."
flow tag create -t tag2
```

14.6.2 update

- *Description:* Update information of tag.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	tag_name	-t	--tag-name	Yes	The name of tag
2	new_tag_name		--new-tag-name	No	New name of tag
3	new_tag_description		--new-tag-desc	No	New description of tag

- *Examples:*

```
flow tag update -t tag1 --new-tag-name tag2
flow tag update -t tag1 --new-tag-desc "This is the new description."
```

14.6.3 list

- *Description:* List recorded tags.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	limit	-l	--limit	No	Number of records to return. (default: 10)

- *Examples:*

```
flow tag list
flow tag list -l 3
```

14.6.4 query

- *Description:* Retrieve tag.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	tag_name	-t	--tag-name	Yes	The name of tag
2	with_model		--with-model	No	If specified, the information of models which have the tag custom queried would be displayed

- *Examples:*

```
flow tag query -t $TAG_NAME
flow tag query -t $TAG_NAME --with-model
```

14.6.5 delete

- *Description:* Delete tag.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	tag_name	-t	--tag-name	Yes	The name of tag

- *Examples:*

```
flow tag delete -t tag1
```

14.7 Data

14.7.1 download

- *Description:* Download Data Table.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Configuration file path

- *Examples:*

```
flow data download -c fate_flow/examples/download_host.json
```

14.7.2 upload

- *Description:* Upload Data Table.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	conf_path	-c	--conf-path	Yes	Configuration file path
2	verbose		--verbose	No	If specified, verbose mode will be turn on. Users can have feedback on upload task in progress. (Default: False)
3	drop		--drop	No	If specified, data of old version would be replaced by the current version. Otherwise, current upload task would be rejected. (Default: False)

- *Examples:*

```
flow data upload -c fate_flow/examples/upload_guest.json
flow data upload -c fate_flow/examples/upload_host.json --verbose --drop
```

14.7.3 upload-history

- *Description:* Query Upload Table History.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	limit	-l	--limit	No	Number of records to return. (default: 10)
2	job_id	-j	--job_id	No	Job ID

- *Examples:*

```
flow data upload-history -l 20
flow data upload-history --job-id $JOB_ID
```

14.8 Task

14.8.1 query

- *Description:* Query task information by filters.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	job_id	-j	--job_id	No	Job ID
2	role	-r	--role	No	Role
3	party_id	-p	--party_id	No	Party ID
4	component_name	-cpn	--component_name	No	Component Name
5	status	-s	--status	No	Job Status

- *Examples:*

```
flow task query -j $JOB_ID -p 9999 -r guest
flow task query -cpn hetero_feature_binning_0 -s complete
```

14.8.2 list

- *Description:* List tasks.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	limit	-l	--limit	No	Number of records to return. (default: 10)

- *Examples:*

```
flow task list
flow task list -l 25
```

14.9 Table

14.9.1 info

- *Description:* Query Table Information.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	namespace	-n	--namespace	Yes	Namespace
2	table_name	-t	--table-name	Yes	Table Name

- *Examples:*

```
flow table info -n $NAMESPACE -t $TABLE_NAME
```

14.9.2 delete

- *Description:* Delete A Specified Table.
- *Arguments:*

No.	Argument	Flag_1	Flag_2	Required	Description
1	namespace	-n	--namespace	No	Namespace
2	table_name	-t	--table_name	No	Table name

- *Examples:*

```
flow table delete -n $NAMESPACE -t $TABLE_NAME
```

14.10 Queue

14.10.1 clean

- *Description:* Cancel all jobs in queue.
- *Arguments:* None.
- *Examples:*

```
flow queue clean
```

FATE PIPELINE

Pipeline is a high-level python API that allows user to design, start, and query FATE jobs in a sequential manner. FATE Pipeline is designed to be user-friendly and consistent in behavior with FATE command line tools. User can customize job workflow by adding components to pipeline and then initiate a job with one call. In addition, Pipeline provides functionality to run prediction and query information after fitting a pipeline. Run the [mini demo](#) to have a taste of how FATE Pipeline works. Default values of party ids and work mode may need to be modified depending on the deployment setting.

```
python pipeline-mini-demo.py config.yaml
```

For more pipeline demo, please refer to [examples](#).

15.1 A FATE Job is A Directed Acyclic Graph

A FATE job is a dag that consists of algorithm component nodes. FATE pipeline provides easy-to-use tools to configure order and setting of the tasks.

FATE is written in a modular style. Modules are designed to have input and output data and model. Therefore two modules are connected when output of one module is set to be the input of another module. By tracing how one data set is processed through FATE modules, we can see that a FATE job is in fact formed by a sequence of sub-tasks. For example, in the [mini demo](#) above, guest's data is first read in by `Reader`, then loaded into `DataIO`. Overlapping ids between guest and host are then found by running data through `Intersection`. Finally, `HeteroLR` model is fit on the data. Each listed modules run a small task with the data, and together they constitute a model training job.

Beyond the given mini demo, a job may include multiple data sets and models. For more pipeline examples, please refer to [examples](#).

15.2 Install Pipeline

15.2.1 Pipeline CLI

After successfully installed FATE Client, user needs to configure server information and log directory for Pipeline. Pipeline provides a command line tool for quick setup. Run the following command for more information.

```
pipeline init --help
```

15.3 Interface of Pipeline

15.3.1 Component

FATE modules are wrapped into `component` in Pipeline API. Each component can take in and output `Data` and `Model`. Parameters of components can be set conveniently at the time of initialization. Unspecified parameters will take default values. All components have a `name`, which can be arbitrarily set. A component's name is its identifier, and so it must be unique within a pipeline. We suggest that each component name includes a numbering as suffix for easy tracking.

Components each may have input and/or output `Data` and/or `Model`. For details on how to use component, please refer to this [guide](#).

An example of initializing a component with specified parameter values:

```
hetero_lr_0 = HeteroLR(name="hetero_lr_0", early_stop="weight_diff", max_iter=10,
                        early_stopping_rounds=2, validation_freqs=2)
```

15.3.2 Input

`Input` encapsulates all input of a component, including `Data` and `Model` input. To access input of a component, reference its `input` attribute:

```
input_all = dataio_0.input
```

15.3.3 Output

`Output` encapsulates all output result of a component, including `Data` and `Model` output. To access Output from a component, reference its `output` attribute:

```
output_all = dataio_0.output
```

15.3.4 Data

`Data` wraps all data-type input and output of components. FATE Pipeline includes five types of data, each is used for different scenario. For more information, please refer [here](#).

15.3.5 Model

`Model` defines model input and output of components. Similar to `Data`, the two types of models are used for different purposes. For more information, please refer [here](#).

15.4 Build A Pipeline

Below is a general guide to building a pipeline. Please refer to [mini demo](#) for an explained demo.

Once initialized a pipeline, job participants and initiator should be specified. Below is an example of initial setup of a pipeline:

```
pipeline = Pipeline()
pipeline.set_initiator(role='guest', party_id=9999)
pipeline.set_roles(guest=9999, host=10000, arbiter=10000)
```

Reader is required to read in data source so that other component(s) can process data. Define a Reader component:

```
reader_0 = Reader(name="reader_0")
```

In most cases, DataIO follows Reader to transform data into DataInstance format, which can then be used for data engineering and model training. Some components (such as Union and Intersection) can run directly on non-DataInstance tables.

All pipeline components can be configured individually for different roles by setting `get_party_instance`. For instance, DataIO component can be configured specifically for guest like this:

```
dataio_0 = DataIO(name="dataio_0")
guest_component_instance = dataio_0.get_party_instance(role='guest', party_id=9999)
guest_component_instance.component_param(with_label=True, output_format="dense")
```

To include a component in a pipeline, use `add_component`. To add the DataIO component to the previously created pipeline, try this:

```
pipeline.add_component(dataio_0, data=Data(data=reader_0.output.data))
```

15.4.1 Build Fate NN Model In Keras Style

In pipeline, you can build NN structures in a Keras style. Take Homo-NN as an example:

First, import Keras and define your nn structures:

```
from tensorflow.keras import optimizers
from tensorflow.keras.layers import Dense

layer_0 = Dense(units=6, input_shape=(10,), activation="relu")
layer_1 = Dense(units=1, activation="sigmoid")
```

Then, add nn layers into Homo-NN model like using Sequential class in Keras:

```
from pipeline.component.homo_nn import HomoNN

# set parameter
homo_nn_0 = HomoNN(name="homo_nn_0", max_iter=10, batch_size=-1, early_stop={"early_
↪stop": "diff", "eps": 0.0001})
homo_nn_0.add(layer_0)
homo_nn_0.add(layer_1)
```

Set optimizer and compile Homo-NN model:

```
homo_nn_0.compile(optimizer=optimizers.Adam(learning_rate=0.05), metrics=["Hinge",  
↪ "accuracy", "AUC"],  
                  loss="binary_crossentropy")
```

Add it to pipeline:

```
pipeline.add_component(homo_nn, data=Data(train_data=dataio_0.output.data))
```

15.5 Init Runtime JobParameters

To fit or predict, user needs to initialize the runtime environment, like ‘backend’ and ‘work_mode’,

```
from pipeline.runtime.entity import JobParameters  
job_parameters = JobParameters(backend=Backend.EGGROLL, work_mode=WorkMode.STANDALONE)
```

15.6 Run A Pipeline

Having added all components, user needs to first compile pipeline before running the designed job. After compilation, the pipeline can then be fit(run train job) with appropriate Backend and WorkMode.

```
pipeline.compile()  
pipeline.fit(job_parameters)
```

15.7 Query on Tasks

FATE Pipeline provides API to query component information, including data, model, and summary. All query API have matching name to **FlowPy**, while Pipeline retrieves and returns query result directly to user.

```
summary = pipeline.get_component("hetero_lr_0").get_summary()
```

15.8 Deploy Components

Once fitting pipeline completes, prediction can be run on new data set. Before prediction, necessary components need to be first deployed. This step marks selected components to be used by prediction pipeline.

```
# deploy select components  
pipeline.deploy_component([dataio_0, hetero_lr_0])  
# deploy all components  
# note that Reader component cannot be deployed. Always deploy pipeline with Reader_  
↪ by specified component list.  
pipeline.deploy_component()
```

15.9 Predict with Pipeline

First, initiate a new pipeline, then specify data source used for prediction.

```
predict_pipeline = Pipeline()
predict_pipeline.add_component(reader_0)
predict_pipeline.add_component(pipeline,
                               data=Data(predict_input={pipeline.dataio_0.input.data:
↪reader_0.output.data}))
```

Prediction can then be initiated on the new pipeline.

```
predict_pipeline.predict(job_parameters)
```

In addition, since pipeline is modular, user may add new components to the original pipeline before running prediction.

```
predict_pipeline.add_component(evaluation_0, data=Data(data=pipeline.hetero_lr_0.
↪output.data))
predict_pipeline.predict(job_parameters)
```

15.10 Save and Recovery of Pipeline

To save a pipeline, just use **dump** interface.

```
pipeline.dump("pipeline_saved.pkl")
```

To restore a pipeline, use **load_model_from_file** interface.

```
from pipeline.backend.pipeline import Pipeline
Pipeline.load_model_from_file("pipeline_saved.pkl")
```

15.11 Summary Info of Pipeline

To get the details of a pipeline, use **describe** interface, which prints the “create time” fit or predict state and the constructed dsl if exists.

```
pipeline.describe()
```

15.12 Upload Data

Pipeline provides functionality to upload local data table. Please refer to [upload demo](#) for a quick example. Note that uploading data can be added all at once, and the pipeline used to perform upload can be either training or prediction pipeline (or, a separate pipeline as in the demo).

15.13 Pipeline vs. CLI

In the past versions, user interacts with FATE through command line interface, often with manually configured conf and dsl json files. Manual configuration can be tedious and error-prone. FATE Pipeline forms task configure files automatically at compilation, allowing quick experiment with task design.

FATE TEST

A collection of useful tools to running FATE's test.

16.1 quick start

1. (optional) create virtual env

```
python -m venv venv
source venv/bin/activate
pip install -U pip
```

2. install fate_test

```
pip install fate_test
fate_test --help
```

3. edit default fate_test_config.yaml

```
# edit priority config file with system default editor
# filling some field according to comments
fate_test config edit
```

4. configure FATE-Pipeline and FATE-Flow Commandline server setting

```
# configure FATE-Pipeline server setting
pipeline init --port 9380 --ip 127.0.0.1
# configure FATE-Flow Commandline server setting
flow init --port 9380 --ip 127.0.0.1
```

5. run some fate_test suite

```
fate_test suite -i <path contains *testsuite.json>
```

6. run some fate_test benchmark

```
fate_test benchmark-quality -i <path contains *benchmark.json>
```

7. useful logs or exception will be saved to logs dir with namespace shown in last step

16.2 develop install

It is more convenient to use the editable mode during development: replace step 2 with flowing steps

```
pip install -e ${FATE}/python/fate_client && pip install -e ${FATE}/python/fate_test
```

16.3 command types

- suite: used for running testsuites, collection of FATE jobs

```
fate_test suite -i <path contains *testsuite.json>
```

- benchmark-quality used for comparing modeling quality between FATE and other machine learning systems

```
fate_test bq -i <path contains *benchmark.json>
```

16.4 configuration by examples

1. no need ssh tunnel:

- 9999, service: service_a
- 10000, service: service_b

and both service_a, service_b can be requested directly:

```
work_mode: 1 # 0 for standalone, 1 for cluster
data_base_dir: <path_to_data>
parties:
  guest: [10000]
  host: [9999, 10000]
  arbiter: [9999]
services:
  - flow_services:
    - {address: service_a, parties: [9999]}
    - {address: service_b, parties: [10000]}
```

2. need ssh tunnel:

- 9999, service: service_a
- 10000, service: service_b

service_a, can be requested directly while service_b don't, but you can request service_b in other node, say B:

```
work_mode: 0 # 0 for standalone, 1 for cluster
data_base_dir: <path_to_data>
parties:
  guest: [10000]
  host: [9999, 10000]
  arbiter: [9999]
services:
  - flow_services:
    - {address: service_a, parties: [9999]}
```

(continues on next page)

(continued from previous page)

```
- flow_services:
  - {address: service_b, parties: [1000]}
  ssh_tunnel: # optional
  enable: true
  ssh_address: <ssh_ip_to_B>:<ssh_port_to_B>
  ssh_username: <ssh_username_to B>
  ssh_password: # optional
  ssh_priv_key: "~/ssh/id_rsa"
```

16.5 Testsuite

Testsuite is used for running a collection of jobs in sequence. Data used for jobs could be uploaded before jobs are submitted and, optionally, be cleaned after jobs finish. This tool is useful for FATE's release test.

16.5.1 command options

```
fate_test suite --help
```

1. include:

```
fate_test suite -i <path1 contains *testsuite.json>
```

will run testsuites in *path1*

2. exclude:

```
fate_test suite -i <path1 contains *testsuite.json> -e <path2 to exclude> -e
↪<path3 to exclude> ...
```

will run testsuites in *path1* but not in *path2* and *path3*

3. glob:

```
fate_test suite -i <path1 contains *testsuite.json> -g "hetero*"
```

will run testsuites in sub directory start with *hetero* of *path1*

4. replace:

```
fate_test suite -i <path1 contains *testsuite.json> -r '{"maxIter": 5}'
```

will find all key-value pair with key “maxIter” in *data conf* or *conf* or *dsl* and replace the value with 5

5. timeout:

```
fate_test suite -i <path1 contains *testsuite.json> -m 3600
```

will run testsuites in *path1* and timeout when job does not finish within 3600s; if tasks need more time, use a larger threshold

6. task-cores

```
fate_test suite -i <path1 contains *testsuite.json> -p 4
```

will run testsuites in *path1* with EGGROLL “task-cores” set to 4; only effective for DSL conf

7. update-job-parameters

```
fate_test suite -i <path1 contains *testsuite.json> -j {}
```

will run testsuites in *path1* with respective job parameters set to provided values

8. update-component-parameters

```
fate_test suite -i <path1 contains *testsuite.json> -c {}
```

will run testsuites in *path1* with respective component parameters set to provided values

9. skip-dsl-jobs:

```
fate_test suite -i <path1 contains *testsuite.json> --skip-dsl-jobs
```

will run testsuites in *path1* but skip all *tasks* in testsuites. It's would be useful when only pipeline tasks needed.

10. skip-pipeline-jobs:

```
fate_test suite -i <path1 contains *testsuite.json> --skip-pipeline-jobs
```

will run testsuites in *path1* but skip all *pipeline tasks* in testsuites. It's would be useful when only dsl tasks needed.

11. skip-data:

```
fate_test suite -i <path1 contains *testsuite.json> --skip-data
```

will run testsuites in *path1* without uploading data specified in *testsuite.json*.

12. data only:

```
fate_test suite -i <path1 contains *testsuite.json> --data-only
```

will only upload data specified in *testsuite.json* without running jobs

13. disable-clean-data:

```
fate_test suite -i <path1 contains *testsuite.json> --disable-clean-data
```

will run testsuites in *path1* without removing data from storage after tasks finish

14. enable-clean-data:

```
fate_test suite -i <path1 contains *testsuite.json> --enable-clean-data
```

will remove data from storage after finishing running testsuites

15. yes:

```
fate_test suite -i <path1 contains *testsuite.json> --yes
```

will run testsuites in *path1* directly, skipping double check

16.5.2 testsuite

Configuration of jobs should be specified in a testsuite whose file name ends with “*testsuite.json”. For testsuite examples, please refer [dsl examples](#) and [pipeline examples](#).

A testsuite includes the following elements:

- data: list of local data to be uploaded before running FATE jobs
 - file: path to original data file to be uploaded, should be relative to testsuite or FATE installation path
 - head: whether file includes header
 - partition: number of partition for data storage
 - table_name: table name in storage
 - namespace: table namespace in storage
 - role: which role to upload the data, as specified in fate_test.config; naming format is: “{role_type}_{role_index}”, index starts at 0

```
"data": [
  {
    "file": "examples/data/motor_hetero_host.csv",
    "head": 1,
    "partition": 8,
    "table_name": "motor_hetero_host",
    "namespace": "experiment",
    "role": "host_0"
  }
]
```

- tasks: includes arbitrary number of jobs with paths to corresponding dsl and conf files
 - job: name of job to be run, must be unique within each group list
 - * conf: path to conf file, should be relative to testsuite
 - * dsl: path to dsl file, should be relative to testsuite

```
"tasks": {
  "cv": {
    "conf": "hetero_lr_cv_conf.json",
    "dsl": "hetero_lr_cv_dsl.json"
  },
  "early-stop": {
    "conf": "hetero_lr_early_stop_conf.json",
    "dsl": "hetero_lr_early_stop_dsl.json"
  }
}
```

- pipeline_tasks: includes arbitrary number of pipeline jobs with paths to corresponding python script
 - job: name of job to be run, must be unique within each group list
 - * script: path to pipeline script, should be relative to testsuite

```
"pipeline_tasks": {
  "cv": {
    "script": "pipeline-hetero-lr-cv.py"
  },
}
```

(continues on next page)

(continued from previous page)

```

    "normal": {
      "script": "pipeline-hetero-lr-early-stop.py"
    }
  }
}

```

- model_deps(deps): model to be used for prediction task

```

"tasks": {
  "cv": {
    "conf": "hetero_lr_cv_conf.json",
    "dsl": "hetero_lr_cv_dsl.json"
  },
  "normal": {
    "conf": "hetero_lr_normal_conf.json",
    "dsl": "hetero_lr_normal_dsl.json"
  },
  "predict": {
    "conf": "hetero_lr_normal_predict_conf.json",
    "dsl": "hetero_lr_normal_predict_dsl.json",
    "deps": "normal"
  }
}

```

- data_deps: component output data from previous task to be used as designated input for current task(only used for dsl tasks)

```

"tasks": {
  "column-expand": {
    "conf": "./test_column_expand_job_conf.json",
    "dsl": "./test_column_expand_job_dsl.json"
  },
  "column-expand-train": {
    "conf": "./test_column_expand_train_job_conf.json",
    "dsl": "./test_column_expand_train_job_dsl.json",
    "data_deps": {
      "column-expand": {
        "guest_0": {
          "reader_0": "column_expand_0"
        }
      }
    }
  }
}
}

```

16.6 Benchmark Quality

Benchmark-quality is used for comparing modeling quality between FATE and other machine learning systems. Benchmark produces a metrics comparison summary for each benchmark job group.

Benchmark can also compare metrics of different models from the same script/PipeLine job. Please refer to the *script writing guide* below for instructions.

```
fate_test benchmark-quality -i examples/benchmark_quality/hetero_linear_regression
```

Data Summary			
Data	Information		
train	{ 'guest': 'motor_hetero_guest', 'host': 'motor_hetero_host' }		
test	{ 'guest': 'motor_hetero_guest', 'host': 'motor_hetero_host' }		

Metrics Summary			
Model Name	root_mean_squared_error	r2_score	
mean_squared_error	explained_variance		
local-hetero_linear_regression-regression	0.312552080517407	0.	
9040310440206087	0.09768880303575968	0.9040312584426697	
FATE-hetero_linear_regression-regression	0.3139977881119483	0.	
9031411831961411	0.09859461093919598	0.903146386539082	

Match Results		
Metric	All Match	
root_mean_squared_error	True	
r2_score	True	
mean_squared_error	True	
explained_variance	True	

FATE Script Metrics Summary			
Script Model Name	min	max	mean
linr_train-FATE	-1.5305666678748353	1.4968292506353484	0.03948016870496807
linr_validate-FATE	-1.5305666678748353	1.4968292506353484	0.03948016870496807

FATE Script Metrics Match Results	
Metric	All Match

(continues on next page)

(continued from previous page)

-----+-----		
	min	True
	max	True
	mean	True
-----+-----		

16.6.1 command options

use the following command to show help message

```
fate_test benchmark-quality --help
```

1. include:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json>
```

will run benchmark testsuites in *path1*

2. exclude:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json> -e <path2 to_
↪exclude> -e <path3 to exclude> ...
```

will run benchmark testsuites in *path1* but not in *path2* and *path3*

3. glob:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json> -g "hetero*"
```

will run benchmark testsuites in sub directory start with *hetero* of *path1*

4. tol:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json> -t 1e-3
```

will run benchmark testsuites in *path1* with absolute tolerance of difference between metrics set to 0.001. If absolute difference between metrics is smaller than *tol*, then metrics are considered almost equal. Check benchmark testsuite [writing guide](#) on setting alternative tolerance.

5. skip-data:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json> --skip-data
```

will run benchmark testsuites in *path1* without uploading data specified in *benchmark.json*.

6. disable-clean-data:

```
fate_test suite -i <path1 contains *benchmark.json> --disable-clean-data
```

will run benchmark testsuites in *path1* without removing data from storage after tasks finish

7. enable-clean-data:

```
fate_test suite -i <path1 contains *benchmark.json> --enable-clean-data
```

will remove data from storage after finishing running benchmark testsuites

8. yes:

```
fate_test benchmark-quality -i <path1 contains *benchmark.json> --yes
```

will run benchmark testsuites in *path1* directly, skipping double check

16.6.2 benchmark testsuite

Configuration of jobs should be specified in a benchmark testsuite whose file name ends with “*benchmark.json”. For benchmark testsuite example, please refer [here](#).

A benchmark testsuite includes the following elements:

- data: list of local data to be uploaded before running FATE jobs
 - file: path to original data file to be uploaded, should be relative to testsuite or FATE installation path
 - head: whether file includes header
 - partition: number of partition for data storage
 - table_name: table name in storage
 - namespace: table namespace in storage
 - role: which role to upload the data, as specified in `fate_test.config`; naming format is: “{role_type}_{role_index}”, index starts at 0

```
"data": [
  {
    "file": "examples/data/motor_hetero_host.csv",
    "head": 1,
    "partition": 8,
    "table_name": "motor_hetero_host",
    "namespace": "experiment",
    "role": "host_0"
  }
]
```

- job group: each group includes arbitrary number of jobs with paths to corresponding script and configuration
 - job: name of job to be run, must be unique within each group list
 - * script: path to *testing script*, should be relative to testsuite
 - * conf: path to job configuration file for script, should be relative to testsuite

```
"local": {
  "script": "./local-linr.py",
  "conf": "./linr_config.yaml"
}
```

- compare_setting: additional setting for quality metrics comparison, currently only takes `relative_tol`

If metrics a and b satisfy $\text{abs}(a-b) \leq \max(\text{relative_tol} * \max(\text{abs}(a), \text{abs}(b)), \text{absolute_tol})$ (from [math module](#)), they are considered almost equal. In the below example, metrics from “local” and “FATE” jobs are considered almost equal if their relative difference is smaller than $0.05 * \max(\text{abs}(\text{local_metric}), \text{abs}(\text{pipeline_metric}))$.

```

"linear_regression-regression": {
  "local": {
    "script": "./local-linr.py",
    "conf": "./linr_config.yaml"
  },
  "FATE": {
    "script": "./fate-linr.py",
    "conf": "./linr_config.yaml"
  },
  "compare_setting": {
    "relative_tol": 0.01
  }
}

```

16.6.3 testing script

All job scripts need to have `Main` function as an entry point for executing jobs; scripts should return two dictionaries: first with data information key-value pairs: `{data_type}: {data_name_dictionary}`; the second contains `{metric_name}: {metric_value}` key-value pairs for metric comparison.

By default, the final data summary shows the output from the job named “FATE”; if no such job exists, data information returned by the first job is shown. For clear presentation, we suggest that user follow this general [guideline](#) for data set naming. In the case of multi-host task, consider numbering host as such:

```

{'guest': 'default_credit_homo_guest',
 'host_1': 'default_credit_homo_host_1',
 'host_2': 'default_credit_homo_host_2'}

```

Returned quality metrics of the same key are to be compared. Note that only **real-value** metrics can be compared.

To compare metrics of different models from the same script, metrics of each model need to be wrapped into dictionary in the same format as the general metric output above.

In the returned dictionary of script, use reserved key `script_metrics` to indicate the collection of metrics to be compared.

- FATE script: `Main` should have three inputs:
 - config: job configuration, `JobConfig` object loaded from “fate_test_config.yaml”
 - param: job parameter setting, dictionary loaded from “conf” file specified in benchmark testsuite
 - namespace: namespace suffix, user-given *namespace* or generated timestamp string when using *namespace-mangling*
- non-FATE script: `Main` should have one or two inputs:
 - param: job parameter setting, dictionary loaded from “conf” file specified in benchmark testsuite
 - (optional) config: job configuration, `JobConfig` object loaded from “fate_test_config.yaml”

Note that `Main` in FATE & non-FATE scripts can also be set to take zero input argument.

16.7 performance

Performance sub-command is used to test efficiency of designated FATE jobs.

16.7.1 command options

```
fate_test performance --help
```

1. job-type:

```
fate_test performance -t intersect
```

will run testsuites from intersect sub-directory (set in config) in the default performance directory; note that only one of `task` and `include` is needed

2. include:

```
fate_test performance -i <path1 contains *testsuite.json>; note that only one of   
↪ ``task`` and ``include`` needs to be specified.
```

will run testsuites in *path1*. Note that only one of `task` and `include` needs to be specified; when both are given, path from `include` takes priority.

3. replace:

```
fate_test performance -i <path1 contains *testsuite.json> -r '{"maxIter": 5}'
```

will find all key-value pair with key “maxIter” in *data conf* or *conf* or *dsl* and replace the value with 5

4. timeout:

```
fate_test performance -i <path1 contains *testsuite.json> -m 3600
```

will run testsuites in *path1* and timeout when job does not finish within 3600s; if tasks need more time, use a larger threshold

5. max-iter:

```
fate_test performance -i <path1 contains *testsuite.json> -e 5
```

will run testsuites in *path1* with all values to key “max_iter” set to 5

6. max-depth

```
fate_test performance -i <path1 contains *testsuite.json> -d 4
```

will run testsuites in *path1* with all values to key “max_depth” set to 4

7. num-trees

```
fate_test performance -i <path1 contains *testsuite.json> -n 5
```

will run testsuites in *path1* with all values to key “num_trees” set to 5

8. task-cores

```
fate_test performance -i <path1 contains *testsuite.json> -p 4
```

will run testsuites in *path1* with EGGROLL “task_cores” set to 4

9. update-job-parameters

```
fate_test performance -i <path1 contains *testsuite.json> -j {}
```

will run testsuites in *path1* with respective job parameters set to provided values

10. update-component-parameters

```
fate_test performance -i <path1 contains *testsuite.json> -c {}
```

will run testsuites in *path1* with respective component parameters set to provided values

11. skip-data:

```
fate_test performance -i <path1 contains *testsuite.json> --skip-data
```

will run testsuites in *path1* without uploading data specified in *testsuite.json*.

12. disable-clean-data:

```
fate_test performance -i <path1 contains *testsuite.json> --disable-clean-data
```

will run testsuites in *path1* without removing data from storage after tasks finish

13. yes:

```
fate_test performance -i <path1 contains *testsuite.json> --yes
```

will run testsuites in *path1* directly, skipping double check

16.8 data

Data sub-command is used for upload, delete, and generate dataset.

16.8.1 command options

```
fate_test data --help
```

1. include:

```
fate_test data [upload|delete] -i <path1 contains *testsuite.json | *benchmark.  
↪ json>
```

will upload/delete dataset in testsuites in *path1*

2. exclude:

```
fate_test data [upload|delete] -i <path1 contains *testsuite.json | *benchmark.  
↪ json> -e <path2 to exclude> -e <path3 to exclude> ...
```

will upload/delete dataset in testsuites in *path1* but not in *path2* and *path3*

3. glob:

```
fate_test data [upload|delete] -i <path1 contains \*testsuite.json | \*benchmark.
↪json> -g "hetero"
```

will upload/delete dataset in testsuites in sub directory start with *hetero* of *path1*

16.8.2 generate command options

```
fate_test data --help
```

1. include:

```
fate_test data generate -i <path1 contains *testsuite.json | *benchmark.json>
```

will generate dataset in testsuites in *path1*; note that only one of type and include is needed

2. host-data-type:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -ht {tag-
↪value | dense | tag }
```

will generate dataset in testsuites *path1* where host data are of selected format

3. sparsity:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -s 0.2
```

will generate dataset in testsuites in *path1* with sparsity at 0.1; useful for tag-formatted data

4. encryption-type:

```
fate_test data generate -i <path1 contains *testsuite.json | *benchmark.json> -p
↪{sha256 | md5}
```

will generate dataset in testsuites in *path1* with hash id using SHA256 method

5. match-rate:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -m 1.0
```

will generate dataset in testsuites in *path1* where generated host and guest data have intersection rate of 1.0

6. guest-data-size:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -ng 10000
```

will generate dataset in testsuites *path1* where guest data each have 10000 entries

7. host-data-size:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -nh 10000
```

will generate dataset in testsuites *path1* where host data have 10000 entries

8. guest-feature-num:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -fg 20
```

will generate dataset in testsuites *path1* where guest data have 20 features

9. host-feature-num:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -fh 200
```

will generate dataset in testsuites *path1* where host data have 200 features

10. output-path:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -o <path2>
```

will generate dataset in testsuites *path1* and write file to *path2*

11. force:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -o <path2> -  
↪-force
```

will generate dataset in testsuites *path1* and write file to *path2*; will overwrite existing file(s) if designated file name found under *path2*

12. split-host:

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> -nh 10000 --  
↪split-host
```

will generate dataset in testsuites *path1*; 10000 entries will be divided equally among all host data sets

13. upload-data

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> --upload-  
↪data
```

will generate dataset in testsuites *path1* and upload generated data for all parties to FATE

14. remove-data

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> --remove-  
↪data
```

(effective with `upload-data` set to `True`) will delete generated data after generate and upload dataset in testsuites *path1*

15. use-local-data

```
fate_test suite -i <path1 contains *testsuite.json | *benchmark.json> --use-local-  
↪data
```

(effective with `upload-data` set to `True`) will generate dataset in testsuites *path1* and upload data from local server; use this option if flow and data storage are deployed to the same server

16.9 full command options

16.9.1 fate_test

A collection of useful tools to running FATE's test.

```
fate_test [OPTIONS] COMMAND [ARGS]...
```

Options

- b, --backend** <backend>
Manual specify backend, 0 for eggroll, 1 for spark
- w, --work-mode** <work_mode>
Manual specify work mode, 0 for local, 1 for cluster
- y, --yes**
Skip double check
- nm, --namespace-mangling**
Mangling data namespace
- n, --namespace** <namespace>
Manual specify fate_test namespace
- c, --config** <config>
Manual specify config file

benchmark-quality

process benchmark suite, alias: bq

```
fate_test benchmark-quality [OPTIONS]
```

Options

- i, --include** <include>
Required include **benchmark.json* under these paths
- e, --exclude** <exclude>
exclude **benchmark.json* under these paths
- g, --glob** <glob>
glob string to filter sub-directory of path specified by <include>
- t, --tol** <tol>
tolerance (absolute error) for metrics to be considered almost equal. Comparison is done by evaluating $\text{abs}(a-b)$
 $\leq \max(\text{relative_tol} * \max(\text{abs}(a), \text{abs}(b)), \text{absolute_tol})$
- skip-data**
skip uploading data specified in benchmark conf
- disable-clean-data**
- enable-clean-data**

config

fate_test config

```
fate_test config [OPTIONS] COMMAND [ARGS]...
```

check

check connection

```
fate_test config check [OPTIONS]
```

edit

edit fate_test config file

```
fate_test config edit [OPTIONS]
```

new

create new fate_test config temperate

```
fate_test config new [OPTIONS]
```

show

show fate_test default config path

```
fate_test config show [OPTIONS]
```

data

upload or delete data in suite config files

```
fate_test data [OPTIONS] COMMAND [ARGS]...
```

delete

delete data defined in suite config files

```
fate_test data delete [OPTIONS]
```

Options

- i, --include** <include>
Required include **benchmark.json* under these paths
- e, --exclude** <exclude>
exclude **benchmark.json* under these paths
- g, --glob** <glob>
glob string to filter sub-directory of path specified by <include>
- s, --suite-type** <suite_type>
Required suite type
Options testsuite | benchmark

generate

create data defined in suite config files

```
fate_test data generate [OPTIONS]
```

Options

- i, --include** <include>
Required include **testsuite.json* / **benchmark.json* under these paths
- ht, --host-data-type** <host_data_type>
Select the format of the host data
Options dense | tag | tag_value
- p, --encryption-type** <encryption_type>
Entry ID encryption method for, sha256 and md5
Options sha256 | md5
- m, --match-rate** <match_rate>
Intersection rate relative to guest, between [0, 1]
- s, --sparsity** <sparsity>
The sparsity of tag data, The value is between (0-1)
- ng, --guest-data-size** <guest_data_size>
Set guest data set size, not less than 100
- nh, --host-data-size** <host_data_size>
Set host data set size, not less than 100
- fg, --guest-feature-num** <guest_feature_num>
Set guest feature dimensions
- fh, --host-feature-num** <host_feature_num>
Set host feature dimensions; the default is equal to the number of guest's size
- o, --output-path** <output_path>
Customize the output path of generated data
- force**
Overwrite existing file

--split-host

Divide the amount of host data equally among all the host tables in TestSuite

--upload-data

Generated data will be uploaded

--remove-data

The generated data will be deleted

--use-local-data

The existing data of the server will be uploaded, This parameter is not recommended for distributed applications

upload

upload data defined in suite config files

```
fate_test data upload [OPTIONS]
```

Options

-i, --include <include>

Required include **benchmark.json* under these paths

-e, --exclude <exclude>

exclude **benchmark.json* under these paths

-g, --glob <glob>

glob string to filter sub-directory of path specified by <include>

-s, --suite-type <suite_type>

Required suite type

Options testsuite | benchmark

-r, --role <role>

role to process, default to *all*. use option likes: *guest_0*, *host_0*, *host*

flow-test

flow test

```
fate_test flow-test [OPTIONS] COMMAND [ARGS]...
```

cli

flow cli api test

```
fate_test flow-test cli [OPTIONS]
```

process

flow process test

```
fate_test flow-test process [OPTIONS]
```

rest

flow rest api test

```
fate_test flow-test rest [OPTIONS]
```

sdk

flow sdk api test

```
fate_test flow-test sdk [OPTIONS]
```

performance

Test the performance of big data tasks

```
fate_test performance [OPTIONS]
```

Options

- t, --job-type** <job_type>
Select the job type, you can also set through include
Options intersect | intersect_multi | hetero_lr | hetero_sbt
- i, --include** <include>
include *testsuite.json under these paths
- r, --replace** <replace>
a json string represents mapping for replacing fields in data/conf/dsl
- m, --timeout** <timeout>
Task timeout duration
- e, --max-iter** <max_iter>
When the algorithm model is LR, the number of iterations is set
- d, --max-depth** <max_depth>
When the algorithm model is SecureBoost, set the number of model layers
- n, --num-trees** <num_trees>
When the algorithm model is SecureBoost, set the number of trees
- p, --task-cores** <task_cores>
processors per node
- j, --update-job-parameters** <update_job_parameters>
a json string represents mapping for replacing fields in conf.job_parameters

-c, --update-component-parameters <update_component_parameters>
a json string represents mapping for replacing fields in conf.component_parameters

--skip-data
skip uploading data specified in testsuite

--disable-clean-data

suite

process testsuite

```
fate_test suite [OPTIONS]
```

Options

-i, --include <include>
Required include *testsuite.json under these paths

-e, --exclude <exclude>
exclude *testsuite.json under these paths

-r, --replace <replace>
a json string represents mapping for replacing fields in data/conf/dsl

-g, --glob <glob>
glob string to filter sub-directory of path specified by <include>

-m, --timeout <timeout>
Task timeout duration

-p, --task-cores <task_cores>
processors per node

-j, --update-job-parameters <update_job_parameters>
a json string represents mapping for replacing fields in conf.job_parameters

-c, --update-component-parameters <update_component_parameters>
a json string represents mapping for replacing fields in conf.component_parameters

--skip-dsl-jobs
skip dsl jobs defined in testsuite

--skip-pipeline-jobs
skip pipeline jobs defined in testsuite

--skip-data
skip uploading data specified in testsuite

--data-only
upload data only

--disable-clean-data

--enable-clean-data

DEVELOPING GUIDES

[]

17.1 Develop a runnable algorithm module of FATE

In this document, it describes how to develop an algorithm module, which can be callable under the architecture of FATE.

To develop a module, the following 5 steps are needed.

1. define the python parameter object which will be used in this module.
2. define the setting conf json of the module.
3. define the transfer_variable json if the module needs federation.
4. define your module which should inherit model_base class.
5. Define the protobuf file required for model saving.
6. (optional) define Pipeline component for your module.

In the following sections we will describe the 5 steps in detail, with toy_example.

17.1.1 Step 1. Define the parameter object this module will use

Parameter object is the only way to pass user-define runtime parameters to the developing module, so every module has it's own parameter object. In order to define a usable parameter object, three steps will be needed.

- a. Open a new python file, rename it as xxx_param.py where xxx stands for your module's name, putting it in folder python/federatedml/param/. The class object defined in xxx_param.py should inherit the BaseParam class that define in python/federatedml/param/base_param.py
- b. `__init__` of your parameter class should specify all parameters that the module use.
- c. Override the check interface of BaseParam, without which will cause not implemented error. Check method is use to validate the parameter variables.

Take hetero lr's parameter object as example, the python file is `python/federatedml/param/logistic_regression_param.py` firstly, it inherits BaseParam:

```
class LogisticParam(BaseParam):
```

secondly, define all parameter variable in `__init__` method:

```

def __init__(self, penalty='L2',
             eps=1e-5, alpha=1.0, optimizer='sgd', party_weight=1,
             batch_size=-1, learning_rate=0.01, init_param=InitParam(),
             max_iter=100, converge_func='diff',
             encrypt_param=EncryptParam(), re_encrypt_batches=2,
             encrypted_mode_calculator_param=EncryptedModeCalculatorParam(),
             need_run=True, predict_param=PredictParam(), cv_
↪param=CrossValidationParam()):
    super(LogisticParam, self).__init__()
    self.penalty = penalty
    self.eps = eps
    self.alpha = alpha
    self.optimizer = optimizer
    self.batch_size = batch_size
    self.learning_rate = learning_rate
    self.init_param = copy.deepcopy(init_param)
    self.max_iter = max_iter
    self.converge_func = converge_func
    self.encrypt_param = copy.deepcopy(encrypt_param)
    self.re_encrypt_batches = re_encrypt_batches
    self.party_weight = party_weight
    self.encrypted_mode_calculator_param = copy.deepcopy(encrypted_mode_calculator_
↪param)
    self.need_run = need_run
    self.predict_param = copy.deepcopy(predict_param)
    self.cv_param = copy.deepcopy(cv_param)

```

As the example shown above, the parameter can also be a Param class that inherit the BaseParam. The default setting of this kind of parameter is an instance of this class. Then allocated a deepcopy version of this instance to the class attribution. The deepcopy function is used to avoid same pointer risk during the task running.

Once the class defined properly, a provided parameter parser can parse the value of each attribute recursively.

thirdly, override the check interface:

```

def check(self):
    descr = "logistic_param's"

    if type(self.penalty).__name__ != "str":
        raise ValueError(
            "logistic_param's penalty {} not supported, should be str type".
↪format(self.penalty))
    else:
        self.penalty = self.penalty.upper()
        if self.penalty not in ['L1', 'L2', 'NONE']:
            raise ValueError(
                "logistic_param's penalty not supported, penalty should be 'L1', 'L2'
↪or 'none'")

    if type(self.eps).__name__ != "float":
        raise ValueError(
            "logistic_param's eps {} not supported, should be float type".format(self.
↪eps))

```

17.1.2 Step 2. Define the setting conf of the new module

The purpose to define a setting conf is that fate_flow module extract this file to get the information of how to start program of the module.

- a. Define the setting conf in *python/federatedml/conf/setting_conf/*, name it as xxx.json, where xxx is the module you want to develop. Please note that xxx.json' name "xxx" is very strict, because when fate_flow dsl parser extract the module "xxx" in job dsl, it just concatenates module's name "xxx" with ".json" and retrieve the setting conf in *python/federatedml/conf/setting_conf/xxx.json*.
- b. Field Specification of setting conf json.

module_path the path prefix of the developing module's program.

param_class the path to find the param_class define in Step 1, it's a concatenation of path of the parameter python file and parameter object name.

role

guest the path suffix to start the guest program

host the path suffix to start the host program

arbiter the path suffix to start the arbiter program

What's more, if this module does not need federation, which means all parties start a same program file, "guest|host|arbiter" is another way to define the role keys.

Take hetero-lr as an example, users can find it in *python/federatedml/conf/setting_conf/HeteroLR.json*

```
{
  "module_path": "federatedml/logistic_regression/hetero_logistic_regression",
  "param_class" : "federatedml/param/logistic_regression_param.py/LogisticParam",
  "role": {
    "guest": {
      "program": "hetero_lr_guest.py/HeteroLRGuest"
    },
    "host": {
      "program": "hetero_lr_host.py/HeteroLRHost"
    },
    "arbiter": {
      "program": "hetero_lr_arbiter.py/HeteroLRArbiter"
    }
  }
}
```

Have a look at the above content in HeteroLR.json, HeteroLR is a federation module, its' guest program is define in *python/federatedml/logistic_regression/hetero_logistic_regression/hetero_lr_guest.py* and HeteroLRGuest is the guest class object. The same rules holds in host and arbiter class too. Fate_flow combine's module_path and role's program to run this module. "param_class" indicates that the parameter class object of HeteroLR is defined in "python/federatedml/param/logistic_regression_param.py", and the class name is LogisticParam.

17.1.3 Step 3. Define the transfer variable json of this module and generate transfer variable object. (Optional)

This step is needed only when this module is federated, which means there exists information interaction between different parties.

Note: this json file should be put under the folder `transfer_class`

In this python file, you would need to create a “transfer_variable” class and inherit the `BaseTransferVariables` class. Then, define each transfer variable as its attributes. Here is an example to make it more understandable:

```
from federatedml.transfer_variable.base_transfer_variable import BaseTransferVariables

# noinspection PyAttributeOutsideInit
class HeteroBoostingTransferVariable(BaseTransferVariables):
    def __init__(self, flowid=0):
        super().__init__(flowid)
        self.booster_dim = self._create_variable(name='booster_dim', src=['guest'],
↪dst=['host'])
        self.stop_flag = self._create_variable(name='stop_flag', src=['guest'], dst=[
↪'host'])
        self.predict_start_round = self._create_variable(name='predict_start_round',
↪src=['guest'], dst=['host'])
```

name a string represents variable name

src list, should be some combinations of “guest”, “host”, “arbiter”, it stands for where interactive information is sending from.

dst list, should be some combinations of “guest”, “host”, “arbiter”, defines where the interactive information is sending to.

After setting that, the following command would help you create corresponding json setting file in `auth_conf` folder where `fate_flow` can refer to.

```
python fate_arch/federation/transfer_variable/scripts/generate_auth_conf.py
↪federatedml federatedml/transfer_variable/auth_conf
```

17.1.4 Step 4. Define your module, it should inherit `model_base`

The rule of running a module with `fate_flow_client` is that:

1. retrieves the setting_conf and find the “module” and “role” fields of setting conf.
2. it initializes the running object of every party.
3. calls the fit method of running object.
4. calls the save_data method if needed.
5. calls the export_model method if needed.

In this section, we describe how to do 3-5. Many common interfaces are provided in `python/federatedml/model_base.py`.

Override fit interface if needed The fit function holds the form of following.

```
def fit(self, train_data, validate_data):
```

Both `train_data` and `validate_data` (Optional) are Tables from upstream components (DataIO for example). This is the file where you fit logic of model or feature-engineering components located. When starting a training task, this function will be called by `model_base` automatically.

Override predict interface if needed The predict function holds the form of following.

```
def predict(self, data_inst):
```

`Data_inst` is a DTable. Similar to `fit` function, you can define the prediction procedure in the `predict` function for different roles. When starting a predict task, this function will be called by `model_base` automatically. Meanwhile, in training task, this function will also be called to predict train data and validation data (if existed). If you are willing to use evaluation component to evaluate your predict result, it should be designed as the following format:

- for binary, multi-class classification task and regression task,
 - result header should be: ["label", "predict_result", "predict_score", "predict_detail", "type"]
 - * label: Provided label
 - * predict_result: Your predict result.
 - * predict_score: For binary classification task, it is the score of label "1". For multi-class classification, it is the score of highest label. For regression task, it is your predict result.
 - * predict_detail: For classification task, it is the detail scores of each class. For regression task, it is your predict result.
 - * type: The source of you input data, eg. train or test. It will be added by `model_base` automatically.
- There are two Table return in clustering task.
 - The format of first Table: ["cluster_sample_count", "cluster_inner_dist", "inter_cluster_dist"]
 - * cluster_sample_count: The sample count of each cluster.
 - * cluster_inner_dist: The inner distance of each cluster.
 - * inter_cluster_dist: The inter distance between each clusters.
 - The format of second Table: ["predicted_cluster_index", "distance"]
 - * predicted_cluster_index: Your predict label
 - * distance: The distance between each sample to its center point.

Override transform interface if needed The transform function holds the form of following.

```
def transform(self, data_inst):
```

This function is used for feature-engineering components in predict task.

17.1.5 Step 5. Define the protobuf file required for model saving

Define your save_data interface so that fate-flow can obtain output data through it when needed.

```
def save_data(self):  
    return self.data_output
```

To use the trained model through different platform, FATE use protobuf files to save the parameters and model result of a task. When developing your own module, you are supposed to create two proto files which defined your model content in [this folder](#).

For more details of protobuf, please refer to [this tutorial](#)

The two proto files are 1. File with “meta” as suffix: Save the parameters of a task. 2. File with “param” as suffix: Save the model result of a task.

After defining your proto files, you can use the following script named [proto_generate.sh](#) to create the corresponding python file:

```
bash proto_generate.sh
```

Define export_model interface Similar with part b, define your export_model interface so that fate-flow can obtain output model when needed. The format should be a dict contains both “Meta” and “Param” proto buffer generated. Here is an example showing how to export model.

```
def export_model(self):  
    meta_obj = self._get_meta()  
    param_obj = self._get_param()  
    result = {  
        self.model_meta_name: meta_obj,  
        self.model_param_name: param_obj  
    }  
    return result
```

17.1.6 Step 6. Define Pipeline component for your module

One wrapped into a component, module can be used with FATE Pipeline API. To define a Pipeline component, follow these guidelines:

1. all components reside in [fate_client/pipeline/component](#) directory
2. components should inherit common base Component
3. as a good practice, components should have the same names as their corresponding modules
4. components take in parameters at initialization as defined in [fate_client/pipeline/param](#), where a BaseParam and consts file are provided
5. set attributes of component input and output, including whether module has output model, or type of data output(‘single’ vs. ‘multi’)

Then you may use Pipeline to construct and initiate a job with the newly defined component. For guide on Pipeline usage, please refer to [fate_client/pipeline](#).

17.2 Start a modeling task

After finished developing, here is a simple example for starting a modeling task.

- 1. Upload data** Before starting a task, you need to load data among all the data-providers. To do that, a `load_file` config is needed to be prepared. Then run the following command:

```
flow data upload -c upload_data.json
```

Note: This step is needed for every data-provide node(i.e. Guest and Host).

- 2. Start your modeling task** In this step, two config files corresponding to dsl config file and component config file should be prepared. Please make sure that the `table_name` and `namespace` in the conf file match with `upload_data` conf. Then run the following command:

```
flow job submit -d ${your_dsl_file}.json -c ${your_component_conf_json}
```

If you have defined Pipeline component for your module, you can also make a pipeline script and start your task by:

```
python ${your_pipeline.py}
```

- 3. Check log files** Now you can check out the log in the following path: `${your_install_path}/logs/{your_jobid}`.

For more detailed information about dsl configure file and parameter configure files, please check out *examples/dsl/v2*.

COMPUTING API

Most of the time, the federatedml's user does not need to know how to initialize a computing session because fate flow has already cover this for you. Unless, the user is writing unittest, and CTable related functions are involved. Initialize a computing session:

```
from fate_arch.session import computing_session
# initialize
computing_session.init(work_mode=0, backend=0, session_id="a great session")
# create a table from iterable data
table = computing_session.parallelize(range(100), include_key=False, partition=2)
```

class `computing_session`

static init (*session_id*, *work_mode*=0, *backend*=0)

initialize a computing session

Parameters

- **session_id** (*str*) – session id
- **work_mode** (*int*) – work mode, 0 for standalone, 1 for cluster
- **backend** (*int*) – computing backend, 0 for eggroll, 1 for spark

Returns computing session

Return type instance of concrete subclass of CSessionABC

static parallelize (*data*: *Iterable*, *partition*: *int*, *include_key*: *bool*, ***kwargs*) →

fate_arch.abc._computing.CTableABC

create table from iterable data

Parameters

- **data** (*Iterable*) – data to create table from
- **partition** (*int*) – number of partitions of created table
- **include_key** (*bool*) – True for create table directly from data, False for create table with generated keys start from 0

Returns a table create from data

Return type instance of concrete subclass fo CTableABC

static stop ()

stop session

After creating a table using computing session, many distributed computing api available

distributed computing

Classes:

<i>CTableABC()</i>	a table of pair-like data supports distributed processing
<i>CSessionABC()</i>	computing session to load/create/clean tables

class CTableABC

a table of pair-like data supports distributed processing

Attributes:

<i>partitions</i>	get the partitions of table
-------------------	-----------------------------

Methods:

<i>save</i> (address, partitions, schema, **kwargs)	save table
<i>collect</i> (**kwargs)	collect data from table
<i>take</i> ([n])	take n data from table
<i>first</i> (**kwargs)	take one data from table
<i>count</i> ()	number of data in table
<i>map</i> (func)	apply <i>func</i> to each data
<i>mapValues</i> (func)	apply <i>func</i> to each value of data
<i>mapPartitions</i> (func[, use_previous_behavior, ...])	apply <i>func</i> to each partition of table
<i>mapReducePartitions</i> (mapper, reducer, **kwargs)	apply <i>mapper</i> to each partition of table and then perform reduce by key operation with <i>reducer</i>
<i>applyPartitions</i> (func)	apply <i>func</i> to each partitions as a single object
<i>flatMap</i> (func)	apply a flat <i>func</i> to each data of table
<i>reduce</i> (func)	reduces all value in pair of table by a binary function <i>func</i>
<i>glom</i> ()	coalesces all data within partition into a list
<i>sample</i> (*[, fraction, num, seed])	return a sampled subset of this Table.
<i>filter</i> (func)	returns a new table containing only those keys which satisfy a predicate passed in via <i>func</i> .
<i>join</i> (other, func)	returns intersection of this table and the other table.
<i>union</i> (other[, func])	returns union of this table and the other table.
<i>subtractByKey</i> (other)	returns a new table containing elements only in this table but not in the other table.

abstract property partitions

get the partitions of table

Returns number of partitions

Return type int

abstract save (address: fate_arch.abc._address.AddressABC, partitions: int, schema: dict, **kwargs)

save table

Parameters

- **address** (AddressABC) – address to save table to

- **partitions** (*int*) – number of partitions to save as
- **schema** (*dict*) – table schema

abstract collect (***kwargs*) → Generator
collect data from table

Returns generator of data

Return type generator

Notes

no order guarantee

abstract take (*n=1, **kwargs*)
take *n* data from table

Parameters *n* (*int*) – number of data to take

Returns a list of *n* data

Return type list

Notes

no order guarantee

abstract first (***kwargs*)
take one data from table

Returns a data from table

Return type object

Notes

no order guarantee

abstract count () → int
number of data in table

Returns number of data

Return type int

abstract map (*func*) → *fate_arch.abc._computing.CTableABC*
apply *func* to each data

Parameters **func** (typing.Callable[[object, object], typing.Tuple[object, object]]) – function map (*k1*, *v1*) to (*k2*, *v2*)

Returns A new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([('k1', 1), ('k2', 2), ('k3', 3)],
↳include_key=True, partition=2)
>>> b = a.map(lambda k, v: (k, v**2))
>>> list(b.collect())
[('k1', 1), ('k2', 4), ('k3', 9)]
```

abstract mapValues (*func*)

apply *func* to each value of data

Parameters **func** (`typing.Callable[[object], object]`) – map v1 to v2

Returns A new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([('a', ['apple', 'banana', 'lemon']), (
↳'b', ['grapes'])], include_key=True, partition=2)
>>> b = a.mapValues(lambda x: len(x))
>>> list(b.collect())
[('a', 3), ('b', 1)]
```

abstract mapPartitions (*func*, *use_previous_behavior=True*, *preserves_partitioning=False*)

apply *func* to each partition of table

Parameters

- **func** (`typing.Callable[[iter], list]`) – accept an iterator of pair, return a list of pair
- **use_previous_behavior** (*bool*) – this parameter is provided for compatible reason, if set True, call this func will call `applyPartitions` instead
- **preserves_partitioning** (*bool*) – flag indicate whether the *func* will preserve partition

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([1, 2, 3, 4, 5], include_key=False,
↳partition=2)
>>> def f(iterator):
...     s = 0
...     for k, v in iterator:
...         s += v
...         return [(s, s)]
...
>>> b = a.mapPartitions(f)
```

(continues on next page)

(continued from previous page)

```
>>> list(b.collect())
[(6, 6), (9, 9)]
```

abstract mapReducePartitions (*mapper*, *reducer*, ***kwargs*)

apply *mapper* to each partition of table and then perform reduce by key operation with *reducer*

Parameters

- **mapper** (`typing.Callable[[iter], list]`) – accept an iterator of pair, return a list of pair
- **reducer** (`typing.Callable[[object, object], object]`) – reduce *v1*, *v2* to *v3*

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> table = computing_session.parallelize([(1, 2), (2, 3), (3, 4), (4, 5)],
    ↪ include_key=False, partition=2)
>>> def _mapper(it):
...     r = []
...     for k, v in it:
...         r.append((k % 3, v**2))
...         r.append((k % 2, v ** 3))
...     return r
>>> def _reducer(a, b):
...     return a + b
>>> output = table.mapReducePartitions(_mapper, _reducer)
>>> collected = dict(output.collect())
>>> assert collected[0] == 3 ** 3 + 5 ** 3 + 4 ** 2
>>> assert collected[1] == 2 ** 3 + 4 ** 3 + 2 ** 2 + 5 ** 2
>>> assert collected[2] == 3 ** 2
```

applyPartitions (*func*)

apply *func* to each partitions as a single object

Parameters **func** (`typing.Callable[[iter], object]`) – accept a iterator, return a object

Returns a new table, with each partition contains a single key-value pair

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([1, 2, 3], partition=3, include_
↳key=False)
>>> def f(it):
...     r = []
...     for k, v in it:
...         r.append(v, v**2, v**3)
...     return r
>>> output = a.applyPartitions(f)
>>> assert (2, 2**2, 2**3) in [v[0] for _, v in output.collect()]
```

abstract flatMap (*func*)

apply a flat func to each data of table

Parameters **func** (typing.Callable[[object, object], typing.List[object, object]]) – a flat function accept two parameters return a list of pair

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([(1, 1), (2, 2)], include_key=True,
↳partition=2)
>>> b = a.flatMap(lambda x, y: [(x, y), (x + 10, y ** 2)])
>>> c = list(b.collect())
>>> assert len(c) == 4
>>> assert ((1, 1) in c) and ((2, 2) in c) and ((11, 1) in c) and ((12, 4)
↳in c)
```

abstract reduce (*func*)

reduces all value in pair of table by a binary function *func*

Parameters **func** (typing.Callable[[object, object], object]) – binary function reduce two value into one

Notes

func should be associative

Returns a single object

Return type object

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize(range(100), include_key=False,
↳partition=4)
>>> assert a.reduce(lambda x, y: x + y) == sum(range(100))
```

abstract glom()

coalesces all data within partition into a list

Returns list containing all coalesced partition and its elements. First element of each tuple is chosen from key of last element of each partition.

Return type list

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize(range(5), include_key=False,
↳partition=3).glom().collect()
>>> list(a)
[(2, [(2, 2)]), (3, [(0, 0), (3, 3)]), (4, [(1, 1), (4, 4)])]
```

abstract sample(*, fraction: Optional[float] = None, num: Optional[int] = None, seed=None)

return a sampled subset of this Table.

Parameters

- **fraction** (*float*) – Expected size of the sample as a fraction of this table's size without replacement: probability that each element is chosen. Fraction must be [0, 1] with replacement: expected number of times each element is chosen.
- **num** (*int*) – Exact number of the sample from this table's size
- **seed** (*int*) – Seed of the random number generator. Use current timestamp when *None* is passed.

Notes

use one of *fraction* and *num*, not both

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> x = computing_session.parallelize(range(100), include_key=False,
↳partition=4)
>>> 6 <= x.sample(fraction=0.1, seed=81).count() <= 14
True
```

abstract filter(func)

returns a new table containing only those keys which satisfy a predicate passed in via *func*.

Parameters **func** (*typing.Callable*[[*object*, *object*], *bool*]) – Predicate function returning a boolean.

Returns A new table containing results.

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([0, 1, 2], include_key=False,
    ↪partition=2)
>>> b = a.filter(lambda k, v : k % 2 == 0)
>>> list(b.collect())
[(0, 0), (2, 2)]
>>> c = a.filter(lambda k, v : v % 2 != 0)
>>> list(c.collect())
[(1, 1)]
```

abstract join (*other*, *func*)

returns intersection of this table and the other table.

function *func* will be applied to values of keys that exist in both table.

Parameters

- **other** (*CTableABC*) – another table to be operated with.
- **func** (*typing.Callable*[[*object*, *object*], *object*]) – the function applying to values whose key exists in both tables. default using left table's value.

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([1, 2, 3], include_key=False,
    ↪partition=2) # [(0, 1), (1, 2), (2, 3)]
>>> b = computing_session.parallelize([(1, 1), (2, 2), (3, 3)], include_
    ↪key=True, partition=2)
>>> c = a.join(b, lambda v1, v2 : v1 + v2)
>>> list(c.collect())
[(1, 3), (2, 5)]
```

abstract union (*other*, *func*=<function *CTableABC*.<*lambda*>>)

returns union of this table and the other table.

function *func* will be applied to values of keys that exist in both table.

Parameters

- **other** (*CTableABC*) – another table to be operated with.
- **func** (*typing.Callable*[[*object*, *object*], *object*]) – The function applying to values whose key exists in both tables. default using left table's value.

Returns a new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize([1, 2, 3], include_key=False,
↳partition=2)           # [(0, 1), (1, 2), (2, 3)]
>>> b = computing_session.parallelize([(1, 1), (2, 2), (3, 3)], include_
↳key=True, partition=2)
>>> c = a.union(b, lambda v1, v2 : v1 + v2)
>>> list(c.collect())
[(0, 1), (1, 3), (2, 5), (3, 3)]
```

abstract subtractByKey (*other*)

returns a new table containing elements only in this table but not in the other table.

Parameters **other** (*CTableABC*) – Another table to be subtractbykey with.

Returns A new table

Return type *CTableABC*

Examples

```
>>> from fate_arch.session import computing_session
>>> a = computing_session.parallelize(range(10), include_key=False,
↳partition=2)
>>> b = computing_session.parallelize(range(5), include_key=False,
↳partition=2)
>>> c = a.subtractByKey(b)
>>> list(c.collect())
[(5, 5), (6, 6), (7, 7), (8, 8), (9, 9)]
```

class CSessionABC

computing session to load/create/clean tables

Methods:

<code>load(address, partitions, schema, **kwargs)</code>	load a table from given address
<code>parallelize(data, partition, include_key, ...)</code>	create table from iterable data
<code>cleanup(name, namespace)</code>	delete table(s)

Attributes:

<code>session_id</code>	get computing session id
-------------------------	--------------------------

abstract load (*address: fate_arch.abc._address.AddressABC, partitions, schema: dict, **kwargs*)
→ Union[fate_arch.abc._path.PathABC, fate_arch.abc._computing.CTableABC]
load a table from given address

Parameters

- **address** (*AddressABC*) – address to load table from
- **partitions** (*int*) – number of partitions of loaded table

- **schema** (*dict*) – schema associate with this table

Returns a table in memory

Return type *CTableABC*

abstract parallelize (*data: collections.abc.Iterable, partition: int, include_key: bool, **kwargs*) → *fate_arch.abc._computing.CTableABC*
create table from iterable data

Parameters

- **data** (*Iterable*) – data to create table from
- **partition** (*int*) – number of partitions of created table
- **include_key** (*bool*) – True for create table directly from data, False for create table with generated keys start from 0

Returns a table create from data

Return type *CTableABC*

abstract cleanup (*name, namespace*)
delete table(s)

Parameters

- **name** (*str*) – table name or wildcard character
- **namespace** (*str*) – namespace

abstract property session_id
get computing session id

Returns computing session id

Return type *str*

FEDERATION API

19.1 Low level api

Classes:

<i>FederationABC()</i>	federation, get or remote objects and tables
------------------------	--

class FederationABC

federation, get or remote objects and tables

Methods:

<i>get</i> (name, tag, parties, gc)	get objects/tables from parties
<i>remote</i> (v, name, tag, parties, gc)	remote object/table to parties

abstract get (name: *str*, tag: *str*, parties: *List[fate_arch.common._types.Party]*, gc: *fate_arch.abc._gc.GarbageCollectionABC*) → *List*
get objects/tables from parties

Parameters

- **name** (*str*) – name of transfer variable
- **tag** (*str*) – tag to distinguish each transfer
- **parties** (*typing.List[Party]*) – parties to get objects/tables from
- **gc** (*GarbageCollectionABC*) – used to do some clean jobs

Returns a list of object or a list of table get from parties with same order of parties

Return type *list*

abstract remote (v, name: *str*, tag: *str*, parties: *List[fate_arch.common._types.Party]*, gc: *fate_arch.abc._gc.GarbageCollectionABC*) → *NoReturn*
remote object/table to parties

Parameters

- **v** (*object or table*) – object/table to remote
- **name** (*str*) – name of transfer variable
- **tag** (*str*) – tag to distinguish each transfer
- **parties** (*typing.List[Party]*) – parties to remote object/table to
- **gc** (*GarbageCollectionABC*) – used to do some clean jobs

Returns**Return type** Notes

19.2 user api

remoting or getting an object(table) from other parties is quite easy using apis provided in `Variable`. First to create an instance of `BaseTransferVariable`, which is simply a collection of `Variables`:

```
from federatedml.transfer_variable.transfer_class import secure_add_example_transfer_
    ↪variable
variable = secure_add_example_transfer_variable.SecureAddExampleTransferVariable()
```

Then remote or get object(table) by variable provided by this instance:

```
# remote
variable.guest_share.remote("from guest")

# get
variable.guest_share.get()
```

Classes:

<code>Variable(name, src, ..., dst, ...)</code>	variable to distinguish federation by name
---	--

class `Variable` (*name: str, src: Tuple[str, ...], dst: Tuple[str, ...]*)

variable to distinguish federation by name

Methods:

<code>remote_parties(obj, parties[, suffix])</code>	remote object to specified parties
<code>get_parties(parties[, suffix])</code>	get objects/tables from specified parties
<code>remote(obj[, role, idx, suffix])</code>	send obj to other parties.
<code>get([idx, suffix])</code>	get obj from other parties.

remote_parties (*obj*, *parties: Union[List[fate_arch.common._types.Party], fate_arch.common._types.Party], suffix: Union[Any, Tuple] = ()*)
remote object to specified parties

Parameters

- **obj** (*object or table*) – object or table to remote
- **parties** (*typing.List[Party]*) – parties to remote object/table to
- **suffix** (*str or tuple of str*) – suffix used to distinguish federation with in variable

Returns**Return type** None

get_parties (*parties: Union[List[fate_arch.common._types.Party], fate_arch.common._types.Party], suffix: Union[Any, Tuple] = ()*)
get objects/tables from specified parties

Parameters

- **parties** (*typing.List[Party]*) – parties to remote object/table to
- **suffix** (*str or tuple of str*) – suffix used to distinguish federation with in variable

Returns a list of objects/tables get from parties with same order of `parties`

Return type list

remote (*obj, role=None, idx=-1, suffix=()*)
send obj to other parties.

Parameters

- **obj** – object to be sent
- **role** – role of parties to sent to, use one of ['Host', 'Guest', 'Arbiter', None]. The default is None, means sent values to parties regardless their party role
- **idx** – id of party to sent to. The default is -1, which means sent values to parties regardless their party id
- **suffix** – additional tag suffix, the default is tuple()

get (*idx=-1, suffix=()*)
get obj from other parties.

Parameters

- **idx** – id of party to get from. The default is -1, which means get values from parties regardless their party id
- **suffix** – additional tag suffix, the default is tuple()

Returns object or list of object

PARAMS

Classes:

BoostingParam([task_type, objective_param, ...])	Basic parameter for Boosting Algorithms
ObjectiveParam([objective, params])	Define objective parameters that used in federated ml.
DecisionTreeParam([criterion_method, ...])	Define decision tree parameters that used in federated ml.
CrossValidationParam([n_splits, mode, role, ...])	Define cross validation params
DataSplitParam([random_state, test_size, ...])	Define data split param that used in data split.
DataIOParam([input_format, delimiter, ...])	Define dataio parameters that used in federated ml.
DataTransformParam([input_format, ...])	Define data transform parameters that used in federated ml.
EncryptParam([method, key_length])	Define encryption method that used in federated ml.
EncryptedModeCalculatorParam([mode, ...])	Define the encrypted_mode_calculator parameters.
FeatureBinningParam([method, ...])	Define the feature binning method
FeatureSelectionParam([select_col_indexes, ...])	Define the feature selection parameters.
HeteroNNParam([task_type, config_type, ...])	Parameters used for Hetero Neural Network.
HomoNNParam([api_version, secure_aggregate, ...])	Parameters used for Homo Neural Network.
HomoOneHotParam([transform_col_indexes, ...])	param transform_col_indexes Specify which columns need to calculated. -1 represent for all columns.
InitParam([init_method, init_const, ...])	Initialize Parameters used in initializing a model.
IntersectParam(intersect_method[, ...])	Define the intersect method
EncodeParam([salt, encode_method, base64])	Define the hash method for raw intersect method
RSAParam([salt, hash_method, ...])	Define the hash method for RSA intersect method
LinearParam([penalty, tol, alpha, ...])	Parameters used for Linear Regression.
LocalBaselineParam([model_name, model_opts, ...])	Define the local baseline model param
LogisticParam([penalty, tol, alpha, ...])	Parameters used for Logistic Regression both for Homo mode or Hetero mode.
OneVsRestParam([need_one_vs_rest, has_arbiter])	Define the one_vs_rest parameters.
PoissonParam([penalty, tol, alpha, ...])	Parameters used for Poisson Regression.
PredictParam([threshold])	Define the predict method of HomoLR, HeteroLR, SecureBoosting
RsaParam([rsa_key_n, rsa_key_e, rsa_key_d, ...])	Define the sample method
SampleParam([mode, method, fractions, ...])	Define the sample method

continues on next page

Table 1 – continued from previous page

<code>ScaleParam([method, mode, ...])</code>	Define the feature scale parameters.
<code>StochasticQuasiNewtonParam(...)</code>	Parameters used for stochastic quasi-newton method.
<code>StatisticsParam([statistics, column_names, ...])</code>	Define statistics params
<code>StepwiseParam([score_name, mode, role, ...])</code>	Define stepwise params
<code>UnionParam([need_run, allow_missing, ...])</code>	Define the union method for combining multiple dTables and keep entries with the same id
<code>ColumnExpandParam([append_header, method, ...])</code>	Define method used for expanding column
<code>KmeansParam([k, max_iter, tol, random_stat])</code>	Parameters used for K-means.
<code>ScorecardParam([method, offset, factor, ...])</code>	Define method used for transforming prediction score to credit score
<code>SecureInformationRetrievalParam(...)</code>	security_level: float [0, 1]; if security_level == 0, then do raw data retrieval oblivious_transfer_protocol: OT type, only supports consts.OT_HAUCK commutative_encryption: the commutative encryption scheme used, only supports consts.CE_PH non_committing_encryption: the non-committing encryption scheme used, only supports consts.AES key_size: int >= 768, the key length of the commutative cipher raw_retrieval: bool, perform raw retrieval if raw_retrieval
<code>SampleWeightParam([class_weight, ...])</code>	Define sample weight parameters

```
class BoostingParam (task_type='classification', objective_param=<federatedml.param.boosting_param.ObjectiveParam
object>, learning_rate=0.3, num_trees=5, subsample_feature_rate=1,
n_iter_no_change=True, tol=0.0001, bin_num=32, pre-
dict_param=<federatedml.param.predict_param.PredictParam
object>,
cv_param=<federatedml.param.cross_validation_param.CrossValidationParam
object>, validation_freqs=None, metrics=None, random_seed=100, bin-
ning_error=0.0001)
```

Basic parameter for Boosting Algorithms

Parameters

- **task_type** (str, accepted 'classification', 'regression' only, default: 'classification')–
- **objective_param** (ObjectiveParam Object, default: ObjectiveParam())–
- **learning_rate** (float, accepted float, int or long only, the learning rate of secure boost. default: 0.3)–
- **num_trees** (int, accepted int, float only, the max number of boosting round. default: 5)–
- **subsample_feature_rate** (float, a float-number in [0, 1], default: 1.0)–
- **n_iter_no_change** (bool,)– when True and residual error less than tol, tree building process will stop. default: True
- **bin_num** (int, positive integer greater than 1, bin number use in quantile. default: 32)–
- **validation_freqs** (None or positive integer or container object in python. Do validation in training process or

Not.) – if equals None, will not do validation in train process; if equals positive integer, will validate data every validation_freqs epochs passes; if container object in python, will validate data if epochs belong to this container.

e.g. validation_freqs = [10, 15], will validate data when epoch equals to 10 and 15.

Default: None

class ObjectiveParam (*objective='cross_entropy', params=None*)

Define objective parameters that used in federated ml.

Parameters

- **objective** (*None or str, accepted None, 'cross_entropy', 'lse', 'lae', 'log_cosh', 'tweedie', 'fair', 'huber' only,*) – None in host's config, should be str in guest's config. when task_type is classification, only support cross_entropy, other 6 types support in regression task. default: None
- **params** (*None or list, should be non empty list when objective is 'tweedie', 'fair', 'huber',*) – first element of list should be a float-number large than 0.0 when objective is 'fair', 'huber', first element of list should be a float-number in [1.0, 2.0) when objective is 'tweedie'

class DecisionTreeParam (*criterion_method='xgboost', criterion_params=[0.1, 0], max_depth=3, min_sample_split=2, min_impurity_split=0.001, min_leaf_node=1, max_split_nodes=65536, feature_importance_type='split', n_iter_no_change=True, tol=0.001, min_child_weight=0, use_missing=False, zero_as_missing=False, deterministic=False*)

Define decision tree parameters that used in federated ml.

Parameters

- **criterion_method** (*str, accepted "xgboost" only, the criterion function to use, default: 'xgboost'*) –
- **criterion_params** (*list or dict, should be non empty and elements are float-numbers,*) – if a list is offered, the first one is l2 regularization value, and the second one is l1 regularization value. if a dict is offered, make sure it contains key 'l1', and 'l2'. l1, l2 regularization values are non-negative floats. default: [0.1, 0] or {'l1':0, 'l2':0.1}
- **max_depth** (*int, positive integer, the max depth of a decision tree, default: 3*) –
- **min_sample_split** (*int, least quantity of nodes to split, default: 2*) –
- **min_impurity_split** (*float, least gain of a single split need to reach, default: 1e-3*) –
- **min_child_weight** (*float, sum of hessian needed in child nodes. default is 0*) –
- **min_leaf_node** (*int, when samples no more than min_leaf_node, it becomes a leave, default: 1*) –
- **max_split_nodes** (*int, positive integer, we will use no more than max_split_nodes to*) – parallel finding their splits in a batch, for memory consideration. default is 65536

- **feature_importance_type** (*str, support 'split', 'gain' only.*) – if is 'split', feature_importances calculate by feature split times, if is 'gain', feature_importances calculate by feature split gain. default: 'split'
- **use_missing** (*bool, accepted True, False only, use missing value in training process or not.* default: False)–
- **zero_as_missing** (*bool, accepted True, False only, regard 0 as missing value or not,*) – will be use only if use_missing=True, default: False
- **deterministic** (*bool, ensure stability when computing histogram. Set this to true to ensure stable result when using*) – same data and same parameter. But it may slow down computation.

```
class CrossValidationParam(n_splits=5, mode='hetero', role='guest', shuffle=True, random_seed=1, need_cv=False, output_fold_history=True, history_value_type='score')
```

Define cross validation params

Parameters

- **n_splits** (*int, default: 5*) – Specify how many splits used in KFold
- **mode** (*str, default: 'Hetero'*) – Indicate what mode is current task
- **role** (*str, default: 'Guest'*) – Indicate what role is current party
- **shuffle** (*bool, default: True*) – Define whether do shuffle before KFold or not.
- **random_seed** (*int, default: 1*) – Specify the random seed for numpy shuffle
- **need_cv** (*bool, default False*) – Indicate if this module needed to be run
- **output_fold_history** (*bool, default True*) – Indicate whether to output table of ids used by each fold, else return original input data returned ids are formatted as: {original_id}#fold{fold_num}#{train/validate}
- **history_value_type** (*str, default score, choose between {'instance', 'score'}*) – Indicate whether to include original instance or predict score in the output fold history, only effective when output_fold_history set to True

```
class DataSplitParam(random_state=None, test_size=None, train_size=None, validate_size=None, stratified=False, shuffle=True, split_points=None, need_run=True)
```

Define data split param that used in data split.

Parameters

- **random_state** (*None, int, default: None*) – Specify the random state for shuffle.
- **test_size** (*None, float, int, default: 0.0*) – Specify test data set size. float value specifies fraction of input data set, int value specifies exact number of data instances
- **train_size** (*None, float, int, default: 0.8*) – Specify train data set size. float value specifies fraction of input data set, int value specifies exact number of data instances
- **validate_size** (*None, float, int, default: 0.2*) – Specify validate data set size. float value specifies fraction of input data set, int value specifies exact number of data instances

- **stratified** (*boolean, default: False*) – Define whether sampling should be stratified, according to label value.
- **shuffle** (*boolean, default: True*) – Define whether do shuffle before splitting or not.
- **split_points** (*None, list, default: None*) – Specify the point(s) by which continuous label values are bucketed into bins for stratified split. eg.[0.2] for two bins or [0.1, 1, 3] for 4 bins
- **need_run** (*bool, default: True*) – Specify whether to run data split

```
class DataIOParam(input_format='dense', delimiter=',', data_type='float64', exclusive_data_type=None, tag_with_value=False, tag_value_delimiter=':', missing_fill=False, default_value=0, missing_fill_method=None, missing_impute=None, outlier_replace=False, outlier_replace_method=None, outlier_impute=None, outlier_replace_value=0, with_label=False, label_name='y', label_type='int', output_format='dense', need_run=True)
```

Define dataio parameters that used in federated ml.

Parameters

- **input_format** (*str, accepted 'dense', 'sparse' 'tag' only in this version. default: 'dense'.*) – please have a look at this tutorial at “DataIO” section of federatedml/util/README.md. Formally,

dense input format data should be set to “dense”, svm-light input format data should be set to “sparse”, tag or **tag:value** input format data should be set to “tag”.

- **delimiter** (*str, the delimiter of data input, default: ','*) –
- **data_type** (*str, the data type of data input, accepted 'float', 'float64', 'int', 'int64', 'str', 'long'*) – “default: “float64”
- **exclusive_data_type** (*dict, the key of dict is col_name, the value is data_type, use to specified special data type*) – of some features.
- **tag_with_value** (*bool, use if input_format is 'tag', if tag_with_value is True,*) – input column data format should be tag[delimiter]value, otherwise is tag only
- **tag_value_delimiter** (*str, use if input_format is 'tag' and 'tag_with_value' is True,*) – delimiter of tag[delimiter]value column value.
- **missing_fill** (*bool, need to fill missing value or not, accepted only True/False, default: False*) –
- **default_value** (*None or single object type or list, the value to replace missing value.*) – if None, it will use default value define in federatedml/feature/imputer.py, if single object, will fill missing value with this object, if list, it’s length should be the sample of input data’ feature dimension,

means that if some column happens to have missing values, it will replace it the value by element in the identical position of this list.

default: None

- **missing_fill_method** (*None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None*) –

- **missing_impute** (None or list, element of list can be any type, or auto generated if value is None, define which values to be consider as missing, default: None)-
- **outlier_replace**(bool, need to replace outlier value or not, accepted only True/False, default: True)-
- **outlier_replace_method** (None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None)-
- **outlier_impute** (None or list, element of list can be any type, which values should be regard as missing value, default: None)-
- **outlier_replace_value** (None or single object type or list, the value to replace outlier.)- if None, it will use default value define in federatedml/feature/imputer.py, if single object, will replace outlier with this object, if list, it's length should be the sample of input data' feature dimension,
means that if some column happens to have outliers, it will replace it the value by element in the identical position of this list.

default: None

- **with_label**(bool, True if input data consist of label, False otherwise. default: 'false')-
- **label_name** (str, column_name of the column where label locates, only use in dense-inputformat. default: 'y')-
- **label_type** (object, accepted 'int', 'int64', 'float', 'float64', 'long', 'str' only,) - use when with_label is True. default: 'false'
- **output_format** (str, accepted 'dense', 'sparse' only in this version. default: 'dense')-

```
class DataTransformParam(input_format='dense', delimiter=',', data_type='float64', exclusive_data_type=None, tag_with_value=False, tag_value_delimiter=':', missing_fill=False, default_value=0, missing_fill_method=None, missing_impute=None, outlier_replace=False, outlier_replace_method=None, outlier_impute=None, outlier_replace_value=0, with_label=False, label_name='y', label_type='int', output_format='dense', need_run=True)
```

Define data transform parameters that used in federated ml.

Parameters

- **input_format** (str, accepted 'dense', 'sparse' 'tag' only in this version. default: 'dense'.) - please have a look at this tutorial at “DataTransform” section of federatedml/util/README.md. Formally,
dense input format data should be set to “dense”, svm-light input format data should be set to “sparse”, tag or tag:value input format data should be set to “tag”.
- **delimiter**(str, the delimiter of data input, default: ',')-
- **data_type** (str, the data type of data input, accepted 'float', 'float64', 'int', 'int64', 'str', 'long')- “default: “float64”

- **exclusive_data_type** (dict, the key of dict is col_name, the value is data_type, use to specified special data type) - of some features.
- **tag_with_value** (bool, use if input_format is 'tag', if tag_with_value is True,) - input column data format should be tag[delimiter]value, otherwise is tag only
- **tag_value_delimiter** (str, use if input_format is 'tag' and 'tag_with_value' is True,) - delimiter of tag[delimiter]value column value.
- **missing_fill** (bool, need to fill missing value or not, accepted only True/False, default: False)-
- **default_value** (None or single object type or list, the value to replace missing value.) - if None, it will use default value define in federatedml/feature/imputer.py, if single object, will fill missing value with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have missing values, it will replace it the value by element in the identical position of this list.

default: None

- **missing_fill_method** (None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None)-
- **missing_impute** (None or list, element of list can be any type, or auto generated if value is None, define which values to be consider as missing, default: None)-
- **outlier_replace** (bool, need to replace outlier value or not, accepted only True/False, default: True)-
- **outlier_replace_method** (None or str, the method to replace missing value, should be one of [None, 'min', 'max', 'mean', 'designated'], default: None)-
- **outlier_impute** (None or list, element of list can be any type, which values should be regard as missing value, default: None)-
- **outlier_replace_value** (None or single object type or list, the value to replace outlier.) - if None, it will use default value define in federatedml/feature/imputer.py, if single object, will replace outlier with this object, if list, it's length should be the sample of input data' feature dimension,

means that if some column happens to have outliers, it will replace it the value by element in the identical position of this list.

default: None

- **with_label** (bool, True if input data consist of label, False otherwise. default: 'false')-
- **label_name** (str, column_name of the column where label locates, only use in dense-inputformat. default: 'y')-
- **label_type** (object, accepted 'int', 'int64', 'float', 'float64', 'long', 'str' only,) - use when with_label is True. default: 'false'

- **output_format** (*str*, accepted 'dense', 'sparse' only in this version. default: 'dense')–

class EncryptParam (*method='Paillier', key_length=1024*)

Define encryption method that used in federated ml.

Parameters

- **method** (*str*, default: 'Paillier') – If method is 'Paillier', Paillier encryption will be used for federated ml. To use non-encryption version in HomoLR, set this to None. For detail of Paillier encryption, please check out the paper mentioned in README file. Accepted values: {'Paillier', 'IterativeAffine', 'Random_IterativeAffine'}
- **key_length** (*int*, default: 1024) – Used to specify the length of key in this encryption method.

class EncryptedModeCalculatorParam (*mode='strict', re_encrypted_rate=1*)

Define the encrypted_mode_calculator parameters.

Parameters

- **mode** (*str*, support 'strict', 'fast', 'balance', 'confusion_opt', 'only', default: strict)–
- **re_encrypted_rate** (*float or int*, numeric number in [0, 1], use when mode equals to 'balance', default: 1)–

class FeatureBinningParam (*method='quantile', compress_thres=10000, head_size=10000, error=0.0001, bin_num=10, bin_indexes=-1, bin_names=None, adjustment_factor=0.5, transform_param=<federatedml.param.feature_binning_param.TransformParam object>, local_only=False, category_indexes=None, category_names=None, need_run=True, skip_static=False*)

Define the feature binning method

Parameters

- **method** (*str*, 'quantile' 'bucket' or 'optimal', default: 'quantile') – Binning method.
- **compress_thres** (*int*, default: 10000) – When the number of saved summaries exceed this threshold, it will call its compress function
- **head_size** (*int*, default: 10000) – The buffer size to store inserted observations. When head list reach this buffer size, the QuantileSummaries object start to generate summary(or stats) and insert into its sampled list.
- **error** (*float*, $0 \leq \text{error} < 1$ default: 0.001) – The error of tolerance of binning. The final split point comes from original data, and the rank of this value is close to the exact rank. More precisely, $\text{floor}((p - 2 * \text{error}) * N) \leq \text{rank}(x) \leq \text{ceil}((p + 2 * \text{error}) * N)$ where p is the quantile in float, and N is total number of data.
- **bin_num** (*int*, $\text{bin_num} > 0$, default: 10) – The max bin number for binning
- **bin_indexes** (*list of int or int*, default: -1) – Specify which columns need to be binned. -1 represent for all columns. If you need to indicate specific cols, provide a list of header index instead of -1.
- **bin_names** (*list of string*, default: []) – Specify which columns need to be calculated. Each element in the list represent for a column name in header.

- **adjustment_factor** (*float, default: 0.5*) – the adjustment factor when calculating WOE. This is useful when there is no event or non-event in a bin. Please note that this parameter will NOT take effect for setting in host.
- **category_indexes** (*list of int or int, default: []*) – Specify which columns are category features. -1 represent for all columns. List of int indicate a set of such features. For category features, bin_obj will take its original values as split_points and treat them as have been binned. If this is not what you expect, please do NOT put it into this parameters.

The number of categories should not exceed bin_num set above.

- **category_names** (*list of string, default: []*) – Use column names to specify category features. Each element in the list represent for a column name in header.
- **local_only** (*bool, default: False*) – Whether just provide binning method to guest party. If true, host party will do nothing. Warnings: This parameter will be deprecated in future version.
- **transform_param** (*TransformParam*) – Define how to transfer the binned data.
- **need_run** (*bool, default True*) – Indicate if this module needed to be run
- **skip_static** (*bool, default False*) – If true, binning will not calculate iv, woe etc. In this case, optimal-binning will not be supported.

```
class FeatureSelectionParam(select_col_indexes=-1, select_names=None, filter_methods=None,
                           unique_param=<federatedml.param.feature_selection_param.UniqueValueParam
                           object>, iv_value_param=<federatedml.param.feature_selection_param.IVValueSelectionPa
                           object>, iv_percentile_param=<federatedml.param.feature_selection_param.IVPercentileSel
                           object>, iv_top_k_param=<federatedml.param.feature_selection_param.IVTopKParam
                           object>, variance_coe_param=<federatedml.param.feature_selection_param.VarianceOfCoe
                           object>, outlier_param=<federatedml.param.feature_selection_param.OutlierColsSelectionI
                           object>, manually_param=<federatedml.param.feature_selection_param.ManuallyFilterPara
                           object>, percentage_value_param=<federatedml.param.feature_selection_param.Percentage
                           object>, iv_param=<federatedml.param.feature_selection_param.CommonFilterParam
                           object>, statistic_param=<federatedml.param.feature_selection_param.CommonFilterParam
                           object>, psi_param=<federatedml.param.feature_selection_param.CommonFilterParam
                           object>, vif_param=<federatedml.param.feature_selection_param.CommonFilterParam
                           object>, sbt_param=<federatedml.param.feature_selection_param.CommonFilterParam
                           object>, correlation_param=<federatedml.param.feature_selection_param.CorrelationFilter
                           object>, need_run=True)
```

Define the feature selection parameters.

Parameters

- **select_col_indexes** (*list or int, default: -1*) – Specify which columns need to calculated. -1 represent for all columns.
- **select_names** (*list of string, default: []*) – Specify which columns need to calculated. Each element in the list represent for a column name in header.
- **filter_methods** (*list, ["manually", "iv_filter", "statistic_filter", "psi_filter", "hetero_sbt_filter", "homo_sbt_filter", "hetero_fast_sbt_filter", "percentage_value", "vif_filter", "correlation_filter"]*,) –
 default: ["manually"]

The following methods will be deprecated in future version: “unique_value”, “iv_value_thres”, “iv_percentile”, “coefficient_of_variation_value_thres”, “outlier_cols”

Specify the filter methods used in feature selection. The orders of filter used is depended on this list. Please be notified that, if a percentile method is used after some certain filter method, the percentile represent for the ratio of rest features.

e.g. If you have 10 features at the beginning. After first filter method, you have 8 rest. Then, you want top 80% highest iv feature. Here, we will choose $\text{floor}(0.8 * 8) = 6$ features instead of 8.

- **unique_param** (filter the columns if all values in this feature is the same)–
- **iv_value_param** (Use information value to filter columns. If this method is set, a float threshold need to be provided.)
– Filter those columns whose iv is smaller than threshold. Will be deprecated in the future.
- **iv_percentile_param** (Use information value to filter columns. If this method is set, a float ratio threshold)
– need to be provided. Pick $\text{floor}(\text{ratio} * \text{feature_num})$ features with higher iv. If multiple features around the threshold are same, all those columns will be keep. Will be deprecated in the future.
- **variance_coe_param** (Use coefficient of variation to judge whether filtered or not.)– Will be deprecated in the future.
- **outlier_param** (Filter columns whose certain percentile value is larger than a threshold.)– Will be deprecated in the future.
- **percentage_value_param** (Filter the columns that have a value that exceeds a certain percentage.)–
- **iv_param** (Setting how to filter base on iv. It support take high mode only. All of “threshold”,)– “top_k” and “top_percentile” are accepted. Check more details in CommonFilterParam. To use this filter, hetero-feature-binning module has to be provided.
- **statistic_param** (Setting how to filter base on statistic values. All of “threshold”,)– “top_k” and “top_percentile” are accepted. Check more details in CommonFilterParam. To use this filter, data_statistic module has to be provided.
- **psi_param** (Setting how to filter base on psi values. All of “threshold”,)– “top_k” and “top_percentile” are accepted. Its take_high properties should be False to choose lower psi features. Check more details in CommonFilterParam. To use this filter, data_statistic module has to be provided.
- **need_run** (bool, default True)– Indicate if this module needed to be run

```
class HeteroNNParam(task_type='classification', config_type='keras', bottom_nn_define=None,
                    top_nn_define=None, interactive_layer_define=None, interactive_layer_lr=0.9,
                    optimizer='SGD', loss=None, epochs=100, batch_size=-1, early_stop='diff',
                    tol=1e-05, encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>,
                    encrypted_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedM
                    object>, predict_param=<federatedml.param.predict_param.PredictParam ob-
                    ject>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam
                    object>, validation_freqs=None, early_stopping_rounds=None,
                    metrics=None, use_first_metric_only=True, selector_param=<federatedml.param.hetero_nn_param.SelectorParam
                    object>, floating_point_precision=23, drop_out_keep_rate=1.0)
```

Parameters used for Hetero Neural Network.

Parameters

- **task_type** – str, task type of hetero nn model, one of ‘classification’, ‘regression’.
- **config_type** – str, accept “keras” only.
- **bottom_nn_define** – a dict represents the structure of bottom neural network.
- **interactive_layer_define** – a dict represents the structure of interactive layer.
- **interactive_layer_lr** – float, the learning rate of interactive layer.
- **top_nn_define** – a dict represents the structure of top neural network.
- **optimizer** – optimizer method, accept following types: 1. a string, one of “Adadelta”, “Adagrad”, “Adam”, “Adamax”, “Nadam”, “RMSprop”, “SGD” 2. a dict, with a required key-value pair keyed by “optimizer”,
with optional key-value pairs such as learning rate.
defaults to “SGD”
- **loss** – str, a string to define loss function used
- **early_stopping_rounds** – int, default: None
- **stop training if one metric doesn’t improve in last early_stopping_round rounds** (*Will*) –
- **metrics** – list, default: None Indicate when executing evaluation during train process, which metrics will be used. If not set, default metrics for specific task type will be used. As for binary classification, default metrics are [‘auc’, ‘ks’], for regression tasks, default metrics are [‘root_mean_squared_error’, ‘mean_absolute_error’], [ACCURACY, PRECISION, RECALL] for multi-classification task
- **use_first_metric_only** – bool, default: False Indicate whether to use the first metric in *metrics* as the only criterion for early stopping judgement.
- **epochs** – int, the maximum iteration for aggregation in training.
- **batch_size** – int, batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy. defaults to -1.
- **early_stop** – str, accept ‘diff’ only in this version, default: ‘diff’ Method used to judge converge or not.
 - a) diff Use difference of loss between two iterations to judge whether converge.
- **validation_freqs** – None or positive integer or container object in python. Do validation in training process or Not. if equals None, will not do validation in train

process; if equals positive integer, will validate data every validation_freqs epochs passes; if container object in python, will validate data if epochs belong to this container.

e.g. validation_freqs = [10, 15], will validate data when epoch equals to 10 and 15.

Default: None The default value is None, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “epochs” is recommended, otherwise, you will miss the validation scores of last training epoch.

- **floating_point_precision** – None or integer, if not None, means use floating_point_precision-bit to speed up calculation, e.g.: convert an x to round(x * 2**floating_point_precision) during Paillier operation, divide

the result by 2**floating_point_precision in the end.

- **drop_out_keep_rate** – float, should between 0 and 1, if not equals to 1.0, will enabled drop out

```
class HomoNNParam(api_version: int = 0, secure_aggregate: bool = True, aggregate_every_n_epoch: int = 1, config_type: str = 'nn', nn_define: Optional[dict] = None, optimizer: Union[str, dict, types.SimpleNamespace] = 'SGD', loss: Optional[str] = None, metrics: Optional[Union[str, list]] = None, max_iter: int = 100, batch_size: int = -1, early_stop: Union[str, dict, types.SimpleNamespace] = 'diff', encode_label: bool = False, predict_param=<federatedml.param.predict_param.PredictParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>)
```

Parameters used for Homo Neural Network.

Parameters Args – secure_aggregate: enable secure aggregation or not, defaults to True. aggregate_every_n_epoch: aggregate model every n epoch, defaults to 1. config_type: one of “nn”, “keras”, “tf” nn_define: a dict represents the structure of neural network. optimizer: optimizer method, accept following types:

1. a string, one of “Adadelata”, “Adagrad”, “Adam”, “Adamax”, “Nadam”, “RM-Sprop”, “SGD”
2. a dict, with a required key-value pair keyed by “optimizer”, with optional key-value pairs such as learning rate.

defaults to “SGD”

loss: a string metrics: max_iter: the maximum iteration for aggregation in training. batch_size: batch size when updating model.

-1 means use all data in a batch. i.e. Not to use mini-batch strategy. defaults to -1.

early_stop [str, ‘diff’, ‘weight_diff’ or ‘abs’, default: ‘diff’]

Method used to judge converge or not.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) weight_diff: Use difference between weights of two consecutive iterations
- c) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < eps, it is converged.

encode_label : encode label to one_hot.

```
class HomoOneHotParam(transform_col_indexes=- 1, transform_col_names=None, need_run=True, need_alignment=True)
```

Parameters

- **transform_col_indexes** (*list or int, default: -1*) – Specify which columns need to be calculated. -1 represents for all columns.
- **need_run** (*bool, default True*) – Indicate if this module needed to be run
- **need_alignment** (*bool, default True*) – Indicated whether alignment of features is turned on

```
class InitParam(init_method='random_uniform', init_const=1, fit_intercept=True, random_seed=None)
```

Initialize Parameters used in initializing a model.

Parameters

- **init_method** (*str, 'random_uniform', 'random_normal', 'ones', 'zeros' or 'const'. default: 'random_uniform'*) – Initial method.
- **init_const** (*int or float, default: 1*) – Required when `init_method` is 'const'. Specify the constant.
- **fit_intercept** (*bool, default: True*) – Whether to initialize the intercept or not.

```
class IntersectParam(intersect_method: str = 'raw', random_bit=128, sync_intersect_ids=True, join_role='guest', with_encode=False, only_output_key=False, encode_params=<federatedml.param.intersect_param.EncodeParam object>, rsa_params=<federatedml.param.intersect_param.RSAParam object>, intersect_cache_param=<federatedml.param.intersect_param.IntersectCache object>, repeated_id_process=False, repeated_id_owner='guest', with_sample_id=False, allow_info_share: bool = False, info_owner='guest')
```

Define the intersect method

Parameters

- **intersect_method** (*str, it supports 'rsa' and 'raw', default by 'raw'*) –
- **random_bit** (*positive int, it will define the encrypt length of rsa algorithm. It effective only for intersect_method is rsa*) –
- **sync_intersect_ids** (*bool. In rsa, 'synchronize_intersect_ids' is True means guest or host will send intersect results to the others, and False will not.*) – while in raw, 'synchronize_intersect_ids' is True means the role of "join_role" will send intersect results and the others will get them. Default by True.
- **join_role** (*str, role who joins ids, supports "guest" and "host" only and effective only for raw. If it is "guest", the host will send its ids to guest and find the intersection of) – ids in guest; if it is "host", the guest will send its ids to host. Default by "guest".*) –
- **with_encode** (*bool, if True, it will use hash method for intersect ids. Effective only for "raw".*) –
- **encode_params** (*EncodeParam, it effective only for with_encode is True*) –
- **rsa_params** (*RSAParam, effective for rsa method only*) –

- **only_output_key** (*bool*, if false, the results of intersection will include key and value which from input data; if true, it will just include key from input) – data and the value will be empty or some useless character like “intersect_id”
- **repeated_id_process** (*bool*, if true, intersection will process the ids which can be repeatable)–
- **repeated_id_owner** (*str*, which role has the repeated ids)–
- **with_sample_id** (*bool*, data with sample id or not, default False; set this param to True may lead to unexpected behavior)–

class EncodeParam (*salt=""*, *encode_method='none'*, *base64=False*)

Define the hash method for raw intersect method

Parameters

- **salt** (the src data string will be *str = str + salt*, default by empty string)–
- **encode_method** (*str*, the hash method of src data string, it support md5, sha1, sha224, sha256, sha384, sha512, sm3, default by None)–
- **base64** (*bool*, if True, the result of hash will be changed to base64, default by False)–

class RSAParam (*salt=""*, *hash_method='sha256'*, *final_hash_method='sha256'*, *split_calculation=False*, *random_base_fraction=None*, *key_length=1024*)

Define the hash method for RSA intersect method

Parameters

- **salt** (the src data string will be *str = str + salt*, default by '')–
- **hash_method** (*str*, the hash method of src data string, it support sha256, sha384, sha512, sm3, default sha256)–
- **final_hash_method** (*str*, the hash method of result data string, it support md5, sha1, sha224, sha256, sha384, sha512, sm3, default sha256)–
- **split_calculation** (*bool*, if True, Host & Guest split operations for faster performance, recommended on large data set)–
- **random_base_fraction** (*positive float*, if not None, generate (*fraction * public key id count*) of *r* for encryption and reuse generated *r*;) – note that value greater than 0.99 will be taken as 1, and value less than 0.01 will be rounded up to 0.01
- **key_length** (*positive int*, bit count of rsa key, default 1024)–

```
class LinearParam(penalty='L2', tol=0.0001, alpha=1.0, optimizer='sgd', batch_size=-1, learning_rate=0.01, init_param=<federatedml.param.init_model_param.InitParam object>, max_iter=20, early_stop='diff', predict_param=<federatedml.param.predict_param.PredictParam object>, encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>, sqn_param=<federatedml.param.sqn_param.StochasticQuasiNewtonParam object>, encrypted_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedModeCalculatorParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>, decay=1, decay_sqrt=True, validation_freqs=None, early_stopping_rounds=None, stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>, metrics=None, use_first_metric_only=False, float-ing_point_precision=23)
```

Parameters used for Linear Regression.

Parameters

- **penalty** (*str*, 'L1' or 'L2'. default: 'L2') – Penalty method used in LinR. Please note that, when using encrypted version in HeteroLinR, 'L1' is not supported.
- **tol** (*float*, default: 1e-4) – The tolerance of convergence
- **alpha** (*float*, default: 1.0) – Regularization strength coefficient.
- **optimizer** (*str*, 'sgd', 'rmsprop', 'adam', 'sqn', or 'adagrad', default: 'sgd') – Optimize method
- **batch_size** (*int*, default: -1) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float*, default: 0.01) – Learning rate
- **max_iter** (*int*, default: 20) – The maximum iteration for training.
- **init_param** (*InitParam object*, default: default *InitParam object*) – Init param method object.
- **early_stop** (*str*, 'diff' or 'abs' or 'weight_dff', default: 'diff') –

Method used to judge convergence.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < tol, it is converged.
- c) weight_diff: Use difference between weights of two consecutive iterations

- **predict_param** (*PredictParam object*, default: default *PredictParam object*) –
- **encrypt_param** (*EncryptParam object*, default: default *EncryptParam object*) –
- **encrypted_mode_calculator_param** (*EncryptedModeCalculatorParam object*, default: default *EncryptedModeCalculatorParam object*) –
- **cv_param** (*CrossValidationParam object*, default: default *CrossValidationParam object*) –
- **decay** (*int or float*, default: 1) – Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr_0 / (1 + decay * t)$ if decay_sqrt is False. If decay_sqrt is True, $lr = lr_0 / \sqrt{1 + decay * t}$ where t is the iter number.

- **decay_sqrt** (*Bool, default: True*) – $lr = lr_0 / (1 + decay * t)$ if `decay_sqrt` is `False`, otherwise, $lr = lr_0 / \sqrt{1 + decay * t}$
- **validation_freqs** (*int, list, tuple, set, or None*) – validation frequency during training, required when using early stopping. The default value is `None`, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “max_iter” is recommended, otherwise, you will miss the validation scores of the last training iteration.
- **early_stopping_rounds** (*int, default: None*) – If positive number specified, at every specified training rounds, program checks for early stopping criteria. `validation_freqs` must also be set when using early stopping.
- **metrics** (*list or None, default: None*) – Specify which metrics to be used when performing evaluation during training process. If metrics have not improved at `early_stopping_rounds`, training stops before convergence. If set as empty, default metrics will be used. For regression tasks, default metrics are ['root_mean_squared_error', 'mean_absolute_error']
- **use_first_metric_only** (*bool, default: False*) – Indicate whether to use the first metric in `metrics` as the only criterion for early stopping judgement.
- **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*) –
e.g.: convert an `x` to `round(x * 2**floating_point_precision)` during Paillier operation, divide the result by `2**floating_point_precision` in the end.

```
class LocalBaselineParam (model_name='LogisticRegression',      model_opts=None,      pre-
                           dict_param=<federatedml.param.predict_param.PredictParam object>,
                           need_run=True)
```

Define the local baseline model param

Parameters

- **model_name** (*str, sklearn model used to train on baseline model*) –
- **model_opts** (*dict or none, default None*) – Param to be used as input into baseline model
- **predict_param** (*PredictParam object, default: default PredictParam object*) –
- **need_run** (*bool, default True*) – Indicate if this module needed to be run

```
class LogisticParam (penalty='L2', tol=0.0001, alpha=1.0, optimizer='rmsprop', batch_size=-1, learning_rate=0.01,
                     init_param=<federatedml.param.init_model_param.InitParam object>,
                     max_iter=100,
                     early_stop='diff',
                     encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>,
                     predict_param=<federatedml.param.predict_param.PredictParam object>,
                     cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>,
                     decay=1,
                     decay_sqrt=True,
                     multi_class='ovr',
                     validation_freqs=None,
                     early_stopping_rounds=None,
                     stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>,
                     floating_point_precision=23,
                     metrics=None,
                     use_first_metric_only=False)
```

Parameters used for Logistic Regression both for Homo mode or Hetero mode.

Parameters

- **penalty** (*str*, 'L1', 'L2' or *None*. default: 'L2') – Penalty method used in LR. Please note that, when using encrypted version in HomoLR, 'L1' is not supported.
- **tol** (*float*, default: $1e-4$) – The tolerance of convergence
- **alpha** (*float*, default: 1.0) – Regularization strength coefficient.
- **optimizer** (*str*, 'sgd', 'rmsprop', 'adam', 'nesterov_momentum_sgd', 'sqn' or 'adagrad', default: 'rmsprop') – Optimize method, if 'sqn' has been set, sqn_param will take effect. Currently, 'sqn' support hetero mode only.
- **batch_size** (*int*, default: -1) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float*, default: 0.01) – Learning rate
- **max_iter** (*int*, default: 100) – The maximum iteration for training.
- **early_stop** (*str*, 'diff', 'weight_diff' or 'abs', default: 'diff') –

Method used to judge converge or not.

- a) diff Use difference of loss between two iterations to judge whether converge.
- b) weight_diff: Use difference between weights of two consecutive iterations
- c) abs: Use the absolute value of loss to judge whether converge. i.e. if loss < eps, it is converged.

Please note that for hetero-lr multi-host situation, this parameter support “weight_diff” only.

- **decay** (*int or float*, default: 1) – Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr0 / (1 + decay * t)$ if decay_sqrt is False. If decay_sqrt is True, $lr = lr0 / \sqrt{1 + decay * t}$ where t is the iter number.
- **decay_sqrt** (*Bool*, default: True) – $lr = lr0 / (1 + decay * t)$ if decay_sqrt is False, otherwise, $lr = lr0 / \sqrt{1 + decay * t}$
- **encrypt_param** (*EncryptParam object*, default: default *EncryptParam object*) –
- **predict_param** (*PredictParam object*, default: default *PredictParam object*) –
- **cv_param** (*CrossValidationParam object*, default: default *CrossValidationParam object*) –
- **multi_class** (*str*, 'ovr', default: 'ovr') – If it is a multi_class task, indicate what strategy to use. Currently, support 'ovr' short for one_vs_rest only.
- **validation_freqs** (*int, list, tuple, set, or None*) – validation frequency during training.
- **early_stopping_rounds** (*int*, default: None) – Will stop training if one metric doesn't improve in last early_stopping_round rounds
- **metrics** (*list or None*, default: None) – Indicate when executing evaluation during train process, which metrics will be used. If set as empty, default metrics for specific task type will be used. As for binary classification, default metrics are ['auc', 'ks']

- **use_first_metric_only** (*bool, default: False*) – Indicate whether use the first metric only for early stopping judgement.
 - **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*) –
- e.g.: convert an x to $\text{round}(x * 2^{**\text{floating_point_precision}})$ during Paillier operation, divide the result by $2^{**\text{floating_point_precision}}$ in the end.

class OneVsRestParam (*need_one_vs_rest=False, has_arbiter=True*)

Define the one_vs_rest parameters.

Parameters has_arbiter (*bool. For some algorithm, may not has arbiter, for instances, secureboost of FATE,*) – for these algorithms, it should be set to false. default true

class PoissonParam (*penalty='L2', tol=0.0001, alpha=1.0, optimizer='rmsprop', batch_size=-1, learning_rate=0.01, init_param=<federatedml.param.init_model_param.InitParam object>, max_iter=20, early_stop='diff', exposure_colname=None, predict_param=<federatedml.param.predict_param.PredictParam object>, encrypt_param=<federatedml.param.encrypt_param.EncryptParam object>, encrypted_mode_calculator_param=<federatedml.param.encrypted_mode_calculation_param.EncryptedModeCalculationParam object>, cv_param=<federatedml.param.cross_validation_param.CrossValidationParam object>, stepwise_param=<federatedml.param.stepwise_param.StepwiseParam object>, decay=1, decay_sqrt=True, validation_freqs=None, early_stopping_rounds=None, metrics=None, use_first_metric_only=False, floating_point_precision=23*)

Parameters used for Poisson Regression.

Parameters

- **penalty** (*str, 'L1' or 'L2'. default: 'L2'*) – Penalty method used in Poisson. Please note that, when using encrypted version in HeteroPoisson, 'L1' is not supported.
- **tol** (*float, default: 1e-4*) – The tolerance of convergence
- **alpha** (*float, default: 1.0*) – Regularization strength coefficient.
- **optimizer** (*str, 'sgd', 'rmsprop', 'adam' or 'adagrad', default: 'rmsprop'*) – Optimize method
- **batch_size** (*int, default: -1*) – Batch size when updating model. -1 means use all data in a batch. i.e. Not to use mini-batch strategy.
- **learning_rate** (*float, default: 0.01*) – Learning rate
- **max_iter** (*int, default: 20*) – The maximum iteration for training.
- **init_param** (*InitParam object, default: default InitParam object*) – Init param method object.
- **early_stop** (*str, 'weight_diff', 'diff' or 'abs', default: 'diff'*) –

Method used to judge convergence.

- a) **diff** Use difference of loss between two iterations to judge whether converge.
- b) **weight_diff**: Use difference between weights of two consecutive iterations
- c) **abs**: Use the absolute value of loss to judge whether converge. i.e. if $\text{loss} < \text{eps}$, it is converged.

- **exposure_colname** (*str or None, default: None*) – Name of optional exposure variable in dTable.
- **predict_param** (*PredictParam object, default: default PredictParam object*)–
- **encrypt_param** (*EncryptParam object, default: default EncryptParam object*)–
- **encrypted_mode_calculator_param** (*EncryptedModeCalculatorParam object, default: default EncryptedModeCalculatorParam object*)–
- **cv_param** (*CrossValidationParam object, default: default CrossValidationParam object*)–
- **stepwise_param** (*StepwiseParam object, default: default StepwiseParam object*)–
- **decay** (*int or float, default: 1*) – Decay rate for learning rate. learning rate will follow the following decay schedule. $lr = lr_0 / (1 + decay * t)$ if `decay_sqrt` is False. If `decay_sqrt` is True, $lr = lr_0 / \sqrt{1 + decay * t}$ where t is the iter number.
- **decay_sqrt** (*Bool, default: True*) – $lr = lr_0 / (1 + decay * t)$ if `decay_sqrt` is False, otherwise, $lr = lr_0 / \sqrt{1 + decay * t}$
- **validation_freqs** (*int, list, tuple, set, or None*) – validation frequency during training, required when using early stopping. The default value is None, 1 is suggested. You can set it to a number larger than 1 in order to speed up training by skipping validation rounds. When it is larger than 1, a number which is divisible by “max_iter” is recommended, otherwise, you will miss the validation scores of the last training iteration.
- **early_stopping_rounds** (*int, default: None*) – If positive number specified, at every specified training rounds, program checks for early stopping criteria. `validation_freqs` must also be set when using early stopping.
- **metrics** (*list or None, default: None*) – Specify which metrics to be used when performing evaluation during training process. If metrics have not improved at `early_stopping_rounds`, training stops before convergence. If set as empty, default metrics will be used. For regression tasks, default metrics are ['root_mean_squared_error', 'mean_absolute_error']
- **use_first_metric_only** (*bool, default: False*) – Indicate whether to use the first metric in `metrics` as the only criterion for early stopping judgement.
- **floating_point_precision** (*None or integer, if not None, use floating_point_precision-bit to speed up calculation,*)–
e.g.: convert an x to $\text{round}(x * 2^{**\text{floating_point_precision}})$ during Paillier operation, divide the result by $2^{**\text{floating_point_precision}}$ in the end.

class PredictParam (*threshold=0.5*)

Define the predict method of HomoLR, HeteroLR, SecureBoosting

Parameters threshold (*float or int, The threshold use to separate positive and negative class. Normally, it should be (0,1)*)–

class RsaParam (*rsa_key_n=None, rsa_key_e=None, rsa_key_d=None, save_out_table_namespace=None, save_out_table_name=None*)

Define the sample method

Parameters

- **rsa_key_n**(integer, RSA modulus, default: None)–
- **rsa_key_e**(integer, RSA public exponent, default: None)–
- **rsa_key_d**(integer, RSA private exponent, default: None)–
- **save_out_table_namespace** (str, namespace of dtable where stores the output data. default: None)–
- **save_out_table_name** (str, name of dtable where stores the output data. default: None)–

```
class SampleParam(mode='random', method='downsample', fractions=None, random_state=None,
                  task_type='hetero', need_run=True)
```

Define the sample method

Parameters

- **mode** (str, accepted 'random', 'stratified' only in this version, specify sample to use, default: 'random')–
- **method** (str, accepted 'downsample', 'upsample' only in this version. default: 'downsample')–
- **fractions** (None or float or list, if mode equals to random, it should be a float number greater than 0,)–otherwise a list of elements of pairs like [label_i, sample_rate_i], e.g. [[0, 0.5], [1, 0.8], [2, 0.3]]. default: None
- **random_state** (int, RandomState instance or None, default: None)–
- **need_run** (bool, default True)– Indicate if this module needed to be run

```
class ScaleParam(method='standard_scale', mode='normal', scale_col_indexes=-1,
                 scale_names=None, feat_upper=None, feat_lower=None, with_mean=True,
                 with_std=True, need_run=True)
```

Define the feature scale parameters.

Parameters

- **method** (str, like scale in sklearn, now it support "min_max_scale" and "standard_scale", and will support other scale method soon.) – Default standard_scale, which will do nothing for scale
- **mode** (str, the mode support "normal" and "cap". for mode is "normal", the feat_upper and feat_lower is the normal value like "10" or "3.1" and for "cap", feat_upper and) – feature_lower will between 0 and 1, which means the percentile of the column. Default "normal"
- **feat_upper** (int or float or list of int or float, the upper limit in the column.) – If use list, mode must be "normal", and list length should equal to the number of features to scale. If the scaled value is larger than feat_upper, it will be set to feat_upper. Default None.
- **feat_lower** (int or float or list of int or float, the lower limit in the column.) – If use list, mode must be "normal", and list length should equal to the number of features to scale. If the scaled value is less than feat_lower, it will be set to feat_lower. Default None.

- **scale_col_indexes** (list, the idx of column in *scale_column_idx* will be scaled, while the idx of column is not in, it will not be scaled.)-
- **scale_names** (list of string, default: []) Specify which columns need to scaled. Each element in the list represent for a column name in header.)-
- **with_mean** (bool, used for "standard_scale". Default True.)-
- **with_std** (bool, used for "standard_scale". Default True.) - The standard scale of column x is calculated as : $z = (x - u) / s$, where u is the mean of the column and s is the standard deviation of the column. if with_mean is False, u will be 0, and if with_std is False, s will be 1.
- **need_run** (bool, default True) - Indicate if this module needed to be run

```
class StochasticQuasiNewtonParam(update_interval_L=3, memory_M=5, sample_size=5000,
                                random_seed=None)
```

Parameters used for stochastic quasi-newton method.

Parameters

- **update_interval_L** (int, default: 3) - Set how many iteration to update hess matrix
- **memory_M** (int, default: 5) - Stack size of curvature information, i.e. y_k and s_k in the paper.
- **sample_size** (int, default: 5000) - Sample size of data that used to update Hess matrix

```
class StatisticsParam(statistics='summary', column_names=None, column_indexes=-1,
                      need_run=True, abnormal_list=None, quantile_error=0.0001, bias=True)
```

Define statistics params

Parameters

- **statistics** (list, string, default "summary") - Specify the statistic types to be computed. "summary" represents list: [consts.SUM, consts.MEAN, consts.STANDARD_DEVIATION, consts.MEDIAN, consts.MIN, consts.MAX, consts.MISSING_COUNT, consts.SKEWNESS, consts.KURTOSIS]
- **column_names** (list of string, default []) - Specify columns to be used for statistic computation by column names in header
- **column_indexes** (list of int, default -1) - Specify columns to be used for statistic computation by column order in header -1 indicates to compute statistics over all columns
- **bias** (bool, default: True) - If False, the calculations of skewness and kurtosis are corrected for statistical bias.
- **need_run** (bool, default True) - Indicate whether to run this modules

```
class StepwiseParam(score_name='AIC', mode='hetero', role='guest', direction='both', max_step=10,
                    nvmin=2, nvmax=None, need_stepwise=False)
```

Define stepwise params

Parameters

- **score_name** (*str*, *default*: 'AIC') – Specify which model selection criterion to be used, choose 'aic' or 'bic'
- **mode** (*str*, *default*: 'Hetero') – Indicate what mode is current task
- **role** (*str*, *default*: 'Guest') – Indicate what role is current party
- **direction** (*str*, *default*: 'both') – Indicate which direction to go for stepwise. 'forward' means forward selection; 'backward' means elimination; 'both' means possible models of both directions are examined at each step.
- **max_step** (*int*, *default*: '10') – Specify total number of steps to run before forced stop.
- **nvmin** (*int*, *default*: '2') – Specify the min subset size of final model, cannot be lower than 2. When $nvmin > 2$, the final model size may be smaller than $nvmin$ due to max_step limit.
- **nvmax** (*int*, *default*: *None*) – Specify the max subset size of final model, $2 \leq nvmin \leq nvmax$. The final model size may be larger than $nvmax$ due to max_step limit.
- **need_stepwise** (*bool*, *default* *False*) – Indicate if this module needed to be run

class UnionParam (*need_run=True*, *allow_missing=False*, *keep_duplicate=False*)

Define the union method for combining multiple dTables and keep entries with the same id

Parameters

- **need_run** (*bool*, *default* *True*) – Indicate if this module needed to be run
- **allow_missing** (*bool*, *default* *False*) – Whether allow mismatch between feature length and header length in the result. Note that empty tables will always be skipped regardless of this param setting.
- **keep_duplicate** (*bool*, *default* *False*) – Whether to keep entries with duplicated keys. If set to *True*, a new id will be generated for duplicated entry in the format {id}_{table_name}.

class ColumnExpandParam (*append_header=None*, *method='manual'*, *fill_value=1e-08*, *need_run=True*)

Define method used for expanding column

Parameters

- **append_header** (*None*, *str*, *List[str]* *default*: *None*) – Name(s) for appended feature(s). If *None* is given, module outputs the original input value without any operation.
- **method** (*str*, *default*: 'manual') – If method is 'manual', use user-specified *fill_value* to fill in new features.
- **fill_value** (*int*, *float*, *str*, *List[int]*, *List[float]*, *List[str]* *default*: $1e-8$) – Used for filling expanded feature columns. If given a list, length of the list must match that of *append_header*
- **need_run** (*bool*, *default*: *True*) – Indicate if this module needed to be run.

class KmeansParam (*k=5*, *max_iter=300*, *tol=0.001*, *random_stat=None*)

k [int, should be larger than 1 and less than 100 in this version, default 5.] The number of the centroids to generate.

max_iter [int, default 300.] Maximum number of iterations of the hetero-k-means algorithm to run.

tol : float, default 0.001. random_stat : random seed

```
class ScorecardParam (method='credit', offset=500, factor=20, factor_base=2, upper_limit_ratio=3,
                      lower_limit_value=0, need_run=True)
```

Define method used for transforming prediction score to credit score

Parameters

- **method** (*str*, default: 'credit') – score method, currently only supports “credit”
- **offset** (*int or float*, default: 500) – score baseline
- **factor** (*int or float*, default: 20) – scoring step, when odds double, result score increases by this factor
- **factor_base** (*int or float*, default: 2) – factor base, value $\ln(\text{factor_base})$ is used for calculating result score
- **upper_limit_ratio** (*int or float*, default: 3) – upper bound for odds, credit score upper bound is $\text{upper_limit_ratio} * \text{offset}$
- **lower_limit_value** (*int or float*, default: 0) – lower bound for result score
- **need_run** (*bool*, default: True) – Indicate if this module needs to be run.

```
class SecureInformationRetrievalParam (security_level=0.5, oblivious_transfer_protocol='OT_Hauck',
                                       commutative_encryption='CommutativeEncryptionPohligHellman',
                                       non_committing_encryption='aes', key_size=1024,
                                       raw_retrieval=False)
```

security_level: float [0, 1]; if security_level == 0, then do raw data retrieval
oblivious_transfer_protocol: OT type, only supports consts.OT_HAUCK
commutative_encryption: the commutative encryption scheme used, only supports consts.CE_PH
non_committing_encryption: the non-committing encryption scheme used, only supports consts.AES
key_size: int >= 768, the key length of the commutative cipher
raw_retrieval: bool, perform raw retrieval if raw_retrieval

```
class SampleWeightParam (class_weight=None, sample_weight_name=None, normalize=False,
                          need_run=True)
```

Define sample weight parameters

Parameters

- **class_weight** (*str or dict*, default None) – class weight dictionary or class weight computation mode, string value only accepts ‘balanced’; If dict provided, key should be class(label), and weight will not be normalize, e.g.: {‘0’: 1, ‘1’: 2} If both class_weight and sample_weight_name are None, return original input data.
- **sample_weight_name** (*str*, name of column which specifies sample weight.) – feature name of sample weight; if both class_weight and sample_weight_name are None, return original input data
- **normalize** (*bool*, default False) – whether to normalize sample weight extracted from sample_weight_name column
- **need_run** (*bool*, default True) – whether to run this module or not

MATERIALS

Here are some materials for learning and reference

21.1 Architecture

- `FATE_v1.1_ARCH_SIMPLE_201911_v2.pdf`

21.2 Workshop and Conference

- `SecureBoost-ijcai2019-workshop.pdf`
- `GDPR_Data_Shortage_and_AI-AAAI_2019_PPT.pdf`

21.3 Salon

- `FATE.pdf`
- `Pipeline.pdf`

PYTHON MODULE INDEX

f

`fate_arch.abc._computing`, [186](#)

`fate_arch.abc._federation`, [195](#)

`fate_arch.federation.transfer_variable._transfer_variable`,
[196](#)

Symbols

```
--backend <backend>
    fate_test command line option, 171
--config <config>
    fate_test command line option, 171
--data-only
    fate_test-suite command line
        option, 176
--disable-clean-data
    fate_test-benchmark-quality
        command line option, 171
    fate_test-performance command line
        option, 176
    fate_test-suite command line
        option, 176
--enable-clean-data
    fate_test-benchmark-quality
        command line option, 171
    fate_test-suite command line
        option, 176
--encryption-type <encryption_type>
    fate_test-data-generate command
        line option, 173
--exclude <exclude>
    fate_test-benchmark-quality
        command line option, 171
    fate_test-data-delete command line
        option, 173
    fate_test-data-upload command line
        option, 174
    fate_test-suite command line
        option, 176
--force
    fate_test-data-generate command
        line option, 173
--glob <glob>
    fate_test-benchmark-quality
        command line option, 171
    fate_test-data-delete command line
        option, 173
    fate_test-data-upload command line
        option, 174
    fate_test-suite command line
        option, 176
--guest-data-size <guest_data_size>
    fate_test-data-generate command
        line option, 173
--guest-feature-num
    <guest_feature_num>
    fate_test-data-generate command
        line option, 173
--host-data-size <host_data_size>
    fate_test-data-generate command
        line option, 173
--host-data-type <host_data_type>
    fate_test-data-generate command
        line option, 173
--host-feature-num <host_feature_num>
    fate_test-data-generate command
        line option, 173
--include <include>
    fate_test-benchmark-quality
        command line option, 171
    fate_test-data-delete command line
        option, 173
    fate_test-data-generate command
        line option, 173
    fate_test-data-upload command line
        option, 174
    fate_test-performance command line
        option, 175
    fate_test-suite command line
        option, 176
--job-type <job_type>
    fate_test-performance command line
        option, 175
--match-rate <match_rate>
    fate_test-data-generate command
        line option, 173
--max-depth <max_depth>
    fate_test-performance command line
        option, 175
--max-iter <max_iter>
    fate_test-performance command line
        option, 175
```

```

    option, 175
--namespace <namespace>
    fate_test command line option, 171
--namespace-mangling
    fate_test command line option, 171
--num-trees <num_trees>
    fate_test-performance command line
    option, 175
--output-path <output_path>
    fate_test-data-generate command
    line option, 173
--remove-data
    fate_test-data-generate command
    line option, 174
--replace <replace>
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
--role <role>
    fate_test-data-upload command line
    option, 174
--skip-data
    fate_test-benchmark-quality
    command line option, 171
    fate_test-performance command line
    option, 176
    fate_test-suite command line
    option, 176
--skip-dsl-jobs
    fate_test-suite command line
    option, 176
--skip-pipeline-jobs
    fate_test-suite command line
    option, 176
--sparsity <sparsity>
    fate_test-data-generate command
    line option, 173
--split-host
    fate_test-data-generate command
    line option, 173
--suite-type <suite_type>
    fate_test-data-delete command line
    option, 173
    fate_test-data-upload command line
    option, 174
--task-cores <task_cores>
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
--timeout <timeout>
    fate_test-performance command line
    option, 175

    fate_test-suite command line
    option, 176
--tol <tol>
    fate_test-benchmark-quality
    command line option, 171
--update-component-parameters
    <update_component_parameters>
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
--update-job-parameters
    <update_job_parameters>
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
--upload-data
    fate_test-data-generate command
    line option, 174
--use-local-data
    fate_test-data-generate command
    line option, 174
--work-mode <work_mode>
    fate_test command line option, 171
--yes
    fate_test command line option, 171
-b
    fate_test command line option, 171
-c
    fate_test command line option, 171
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
-d
    fate_test-performance command line
    option, 175
-e
    fate_test-benchmark-quality
    command line option, 171
    fate_test-data-delete command line
    option, 173
    fate_test-data-upload command line
    option, 174
    fate_test-performance command line
    option, 175
    fate_test-suite command line
    option, 176
-fg
    fate_test-data-generate command
    line option, 173
-fh
    fate_test-data-generate command

```

- line option, [173](#)
 - g
 - fate_test-benchmark-quality command line option, [171](#)
 - fate_test-data-delete command line option, [173](#)
 - fate_test-data-upload command line option, [174](#)
 - fate_test-suite command line option, [176](#)
 - ht
 - fate_test-data-generate command line option, [173](#)
 - i
 - fate_test-benchmark-quality command line option, [171](#)
 - fate_test-data-delete command line option, [173](#)
 - fate_test-data-generate command line option, [173](#)
 - fate_test-data-upload command line option, [174](#)
 - fate_test-performance command line option, [175](#)
 - fate_test-suite command line option, [176](#)
 - j
 - fate_test-performance command line option, [175](#)
 - fate_test-suite command line option, [176](#)
 - m
 - fate_test-data-generate command line option, [173](#)
 - fate_test-performance command line option, [175](#)
 - fate_test-suite command line option, [176](#)
 - n
 - fate_test command line option, [171](#)
 - fate_test-performance command line option, [175](#)
 - ng
 - fate_test-data-generate command line option, [173](#)
 - nh
 - fate_test-data-generate command line option, [173](#)
 - nm
 - fate_test command line option, [171](#)
 - o
 - fate_test-data-generate command line option, [173](#)
 - p
 - fate_test-data-generate command line option, [173](#)
 - fate_test-performance command line option, [175](#)
 - fate_test-suite command line option, [176](#)
 - r
 - fate_test-data-upload command line option, [174](#)
 - fate_test-performance command line option, [175](#)
 - fate_test-suite command line option, [176](#)
 - s
 - fate_test-data-delete command line option, [173](#)
 - fate_test-data-generate command line option, [173](#)
 - fate_test-data-upload command line option, [174](#)
 - t
 - fate_test-benchmark-quality command line option, [171](#)
 - fate_test-performance command line option, [175](#)
 - w
 - fate_test command line option, [171](#)
 - y
 - fate_test command line option, [171](#)
- A**
- `applyPartitions()` (*CTableABC method*), [189](#)
- B**
- `BoostingParam` (*class in federatedml.param*), [65](#), [200](#)
- C**
- `cleanup()` (*CSessionABC method*), [194](#)
 - `collect()` (*CTableABC method*), [187](#)
 - `ColumnExpandParam` (*class in federatedml.param*), [66](#), [220](#)
 - `computing_session` (*class in fate_arch.session*), [185](#)
 - `count()` (*CTableABC method*), [187](#)
 - `CrossValidationParam` (*class in federatedml.param*), [66](#), [202](#)
 - `CSessionABC` (*class in fate_arch.abc_computing*), [193](#)
 - `CTableABC` (*class in fate_arch.abc_computing*), [186](#)
- D**
- `DataIOParam` (*class in federatedml.param*), [66](#), [203](#)
 - `DataSplitParam` (*class in federatedml.param*), [68](#), [202](#)

DataTransformParam (*class in federatedml.param*), 68, 204

DecisionTreeParam (*class in federatedml.param*), 70, 201

E

EncodeParam (*class in federatedml.param*), 70, 212

EncryptedModeCalculatorParam (*class in federatedml.param*), 71, 206

EncryptParam (*class in federatedml.param*), 71, 206

F

fate_arch.abc._computing
module, 186

fate_arch.abc._federation
module, 195

fate_arch.federation.transfer_variable._transfer_variable
module, 196

fate_test command line option

--backend <backend>, 171
--config <config>, 171
--namespace <namespace>, 171
--namespace-mangling, 171
--work-mode <work_mode>, 171
--yes, 171
-b, 171
-c, 171
-n, 171
-nm, 171
-w, 171
-y, 171

fate_test-benchmark-quality command
line option

--disable-clean-data, 171
--enable-clean-data, 171
--exclude <exclude>, 171
--glob <glob>, 171
--include <include>, 171
--skip-data, 171
--tol <tol>, 171
-e, 171
-g, 171
-i, 171
-t, 171

fate_test-data-delete command line
option

--exclude <exclude>, 173
--glob <glob>, 173
--include <include>, 173
--suite-type <suite_type>, 173
-e, 173
-g, 173
-i, 173
-s, 173

fate_test-data-generate command line
option

--encryption-type
<encryption_type>, 173
--force, 173
--guest-data-size
<guest_data_size>, 173
--guest-feature-num
<guest_feature_num>, 173
--host-data-size <host_data_size>, 173
--host-data-type <host_data_type>, 173
--host-feature-num
<host_feature_num>, 173
--include <include>, 173
--match-rate <match_rate>, 173
--output-path <output_path>, 173
--remove-data, 174
--sparsity <sparsity>, 173
--split-host, 173
--upload-data, 174
--use-local-data, 174
-fg, 173
-fh, 173
-ht, 173
-i, 173
-m, 173
-ng, 173
-nh, 173
-o, 173
-p, 173
-s, 173

fate_test-data-upload command line
option

--exclude <exclude>, 174
--glob <glob>, 174
--include <include>, 174
--role <role>, 174
--suite-type <suite_type>, 174
-e, 174
-g, 174
-i, 174
-r, 174
-s, 174

fate_test-performance command line
option

--disable-clean-data, 176
--include <include>, 175
--job-type <job_type>, 175
--max-depth <max_depth>, 175
--max-iter <max_iter>, 175
--num-trees <num_trees>, 175
--replace <replace>, 175

```

--skip-data, 176
--task-cores <task_cores>, 175
--timeout <timeout>, 175
--update-component-parameters
  <update_component_parameters>,
  175
--update-job-parameters
  <update_job_parameters>, 175
-c, 175
-d, 175
-e, 175
-i, 175
-j, 175
-m, 175
-n, 175
-p, 175
-r, 175
-t, 175
fate_test-suite command line option
--data-only, 176
--disable-clean-data, 176
--enable-clean-data, 176
--exclude <exclude>, 176
--glob <glob>, 176
--include <include>, 176
--replace <replace>, 176
--skip-data, 176
--skip-dsl-jobs, 176
--skip-pipeline-jobs, 176
--task-cores <task_cores>, 176
--timeout <timeout>, 176
--update-component-parameters
  <update_component_parameters>,
  176
--update-job-parameters
  <update_job_parameters>, 176
-c, 176
-e, 176
-g, 176
-i, 176
-j, 176
-m, 176
-p, 176
-r, 176
FeatureBinningParam (class in federatedml.param), 71, 206
FeatureSelectionParam (class in federatedml.param), 72, 207
federatedml.param
  module, 64, 199
FederationABC (class in fate_arch.abc._federation), 195
filter() (CTableABC method), 191
first() (CTableABC method), 187

```

```
flatMap() (CTableABC method), 190
```

G

```

get() (FederationABC method), 195
get() (Variable method), 197
get_parties() (Variable method), 196
glom() (CTableABC method), 191

```

H

```

HeteroNNParam (class in federatedml.param), 73, 208
HomoNNParam (class in federatedml.param), 75, 210
HomoOneHotParam (class in federatedml.param), 75,
210

```

I

```

init() (computing_session static method), 185
InitParam (class in federatedml.param), 76, 211
IntersectParam (class in federatedml.param), 76,
211

```

J

```
join() (CTableABC method), 192
```

K

```
KmeansParam (class in federatedml.param), 77, 220
```

L

```

LinearParam (class in federatedml.param), 77, 212
load() (CSessionABC method), 193
LocalBaselineParam (class in federatedml.param),
78, 214
LogisticParam (class in federatedml.param), 79, 214

```

M

```

map() (CTableABC method), 187
mapPartitions() (CTableABC method), 188
mapReducePartitions() (CTableABC method),
189
mapValues() (CTableABC method), 188
module
  fate_arch.abc._computing, 186
  fate_arch.abc._federation, 195
  fate_arch.federation.transfer_variable._transfer
  196
  federatedml.param, 64, 199

```

O

```

ObjectiveParam (class in federatedml.param), 80,
201
OneVsRestParam (class in federatedml.param), 80,
216

```

P

`parallelize()` (*computing_session static method*),
185
`parallelize()` (*CSessionABC method*), 194
`partitions()` (*CTableABC property*), 186
`PoissonParam` (*class in federatedml.param*), 80, 216
`PredictParam` (*class in federatedml.param*), 82, 217

R

`reduce()` (*CTableABC method*), 190
`remote()` (*FederationABC method*), 195
`remote()` (*Variable method*), 197
`remote_parties()` (*Variable method*), 196
`RSAParam` (*class in federatedml.param*), 82, 212
`RsaParam` (*class in federatedml.param*), 83, 217

S

`sample()` (*CTableABC method*), 191
`SampleParam` (*class in federatedml.param*), 83, 218
`SampleWeightParam` (*class in federatedml.param*),
83, 221
`save()` (*CTableABC method*), 186
`ScaleParam` (*class in federatedml.param*), 84, 218
`ScorecardParam` (*class in federatedml.param*), 84,
221
`SecureInformationRetrievalParam` (*class in
federatedml.param*), 85, 221
`session_id()` (*CSessionABC property*), 194
`StatisticsParam` (*class in federatedml.param*), 85,
219
`StepwiseParam` (*class in federatedml.param*), 85, 219
`StochasticQuasiNewtonParam` (*class in federat-
edml.param*), 86, 219
`stop()` (*computing_session static method*), 185
`subtractByKey()` (*CTableABC method*), 193

T

`take()` (*CTableABC method*), 187

U

`union()` (*CTableABC method*), 192
`UnionParam` (*class in federatedml.param*), 86, 220

V

`Variable` (*class in fate_arch.federation.transfer_variable._transfer_variable*),
196